

PRODUCT SPECIFICATIONS




Low Voltage Landscape Lighting Path Light - B302 Series



Product Description

The B302 LED Path Light is constructed of a heavy duty die-cast brass hat, an extra thick solid brass 23-1/2" stem, and a heavy duty 8" ground stake. The fixture utilizes a beryllium copper socket housing for the G4 LED lamp and protective glass globe. This fixture is a perfect addition to highlight your walkways, pathways, and outdoor living areas with the 360 degree light output. The B302 lights are available in a Powder Coated Black or Antique Brushed Bronze finish. The replacement of the G4 LED Lamp is simple and replaceable by hand, no tools required.

Product Dimension

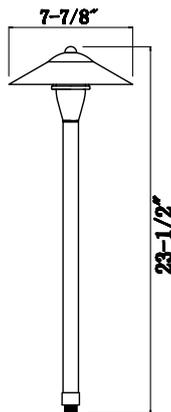

Specifications

- Construction: Heavy Duty Solid Brass
- Finish: Black Powder Coat or Antique Brushed Bronze
- Lead Wire: 36" (Standard) 18AWG, SPT-1W black waterproof wire.
- Mounting: 8" Heavy Duty Stake with cut out for wire exit
- Glass or Lens: Clear Protective Glass Enclosure.
- Light Source (included): G4 3W 2700K 250 Lumen LED Lamp.
- Maximum Lamp Rating: 20W
- Recommended Lamp Rating: 3W
- Operating Voltage: 12V AC
- Shipping Weight: 3.19 lbs
- Powered By: Low Voltage Transformer (Sold Separately)

Features & Benefits

- Heavy Duty Solid Brass Construction with a clear protective heat resistant glass enclosure.
- Powder Coat or Bronzing Finish – Protects fixture from wear and corrosion.
- Beryllium Copper Socket Housing – More corrosion resistant than copper.
- Water Tight Gasket Ring – Keeps water from entering housing.
- Easy replacement of the G4 LED Lamp.
- Comes with (2) Silicone Filled Wire Connectors - Rated for direct burial and outdoor use.

Certifications



Warranty

- Tru-Scapes Lighting Sockets have a Lifetime Warranty.
- Light fixtures of brass, copper or stainless steel, including finishes are warranted for five (5) years.
- LED Bulbs are warranted for five (5) years or 30,000 hours, whichever comes first.
- Stainless Steel, Painted and Weatherproof (plastic housing) transformers, excluding timers and photo cells, are warranted for five (5) years for the original purchaser.
- Tru-Scapes warranties do not cover plants that die or burn because of continuous light shined on them. This is not a defect, but the inherent nature of such plants. Certain acid-loving plants such as arborvitae, pine trees, and others must not be exposed to light of any kind for more than 18 hours a day as these plants need time to sleep and allow photosynthesis to naturally occur.
- Low voltage landscape lighting fixture housings made of brass do naturally patina in color which is not a defect. (Please see www.Tru-Scapes.com for cleaning instructions.)
- See our full Warranty details at www.Tru-Scapes.com/faq.