

## 32" CHANNEL DRAIN ANTI-ENTRAPMENT SUCTION OUTLET COVER AND FRAME

### VGB Series

The AquaStar line of suction outlet covers, compliant with the Virginia Graeme-Baker Pool and Spa Safety Act (ANSI/APSP 16-2011 and NSF/ANSI 50-2009a)

#### FEATURES

Requires a minimum 3" sump depth the entire length of cover

For single or multiple drain use (see installation instructions for plumbing, hydrostatic valve/drain pipe and single or multi-pump connections)

Single – 3" sump depth  
Floor: 236 GPM at 3.4 fps  
Wall: 136 GPM at 1.9 fps

Floor/wall: 106 GPM at 1.5 fps  
Floor/wall: 70.4 GPM at 1.0 fps

22.6 square inch opening

#316 stainless steel screws

Manufactured from superior UV-resistant engineered polymers

All components meet or exceed ANSI/APSP 16-2011 and NSF/ANSI 50-2009a national standards and ASTM G154 UV testing exposure

Includes disposable "dog bone" supports to retain shape during all phases of construction

Replace every five years from the date of installation

12 per case

### Unblockable!



For field-fabricated sump (concrete pools)  
Part # 32CDAVFRxxx


### Two drains in one!

#### STANDARD COLORS

- 32CDAVFR101 – White
- 32CDAVFR102 – Black
- 32CDAVFR103 – Light Gray
- 32CDAVFR104 – Blue
- 32CDAVFR105 – Dark Gray
- 32CDAVFR108 – Tan

Also available cover only without sump/frame  
p/n 32CDVNFxxx  
40 per case

VGB 2008 Compliant

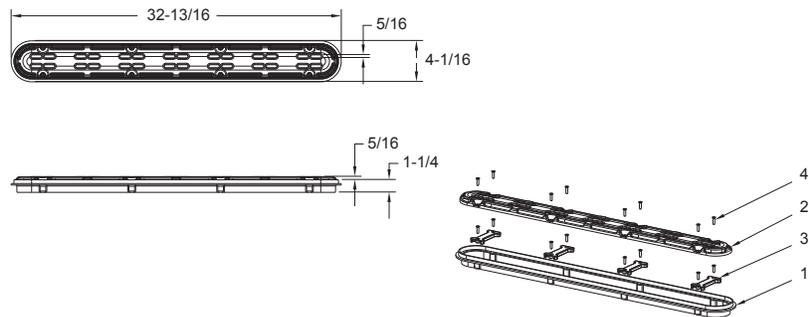

1. 32" channel drain, no sump, frame
2. 32" anti-entrapment suction outlet cover
3. 32" channel drain, frame support "dog bones", qty 4
4. #10 x 3/4" flat head Phillips Type A screw, 316 ss, qty 16