

# 18" SQUARE FRAME WITH FOUR 9" SQUARE WAVE SUCTION OUTLET COVERS AND VENTED RISER RINGS



**VGBA CERTIFIED  
SPECIFICATIONS**

**Open Area**  
176.8 in<sup>2</sup>

For SOFA Specific Flow Ratings and  
specifications please scan QR code or visit  
[www.aquastarpoolproducts.com/flowcode](http://www.aquastarpoolproducts.com/flowcode)



## FEATURES

Certified, Listed, and Labeled in  
conformance with APSP/ANSI/ICC-16 2017  
and NSF/ANSI/CAN 50 standards

Manufactured from superior  
UV-resistant engineered polymers

#316 stainless steel screws

Online product support including  
specifications, General Certificate of  
Conformity, installation instructions, and  
more

Trademarked VGBA compliance button  
easily identifies VGBA 2017 compliant cover  
from on deck and underwater


Replace drain cover every five years from  
the date of installation

4 per case

U.S. Patent [www.aquastarpoolproducts.com/patents](http://www.aquastarpoolproducts.com/patents)

## Unblockable!

No second drain or SVRS required

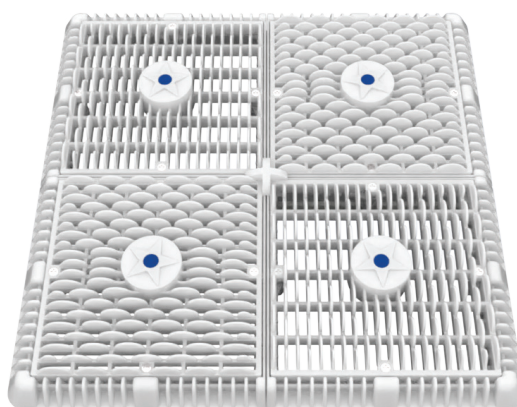

Designed to replace standard 18" square 2 x 2 grid  
cover assemblies that have four 9" square covers  
with 8 1/4" center-to-center screw hole measurement  
with 3/4" deep existing frames.




Part # WAV18WRxxx

## AVAILABLE COLORS

- ☐ WAV18WR101 – White
- ☒ WAV18WR102 – Black

Also available with four outlet covers  
and hardware only and vented riser  
rings for 3/4" deep retrofits  
p/n WAV18WRNFxxx  
3 per case

**VGBA 2017 Compliant**



1. 18" Square Mud Frame
2. 18" Square Riser Ring, Qty 4
3. 9" Wave Square Drain Cover, Qty 4
4. Drop-in Clip
5. #10 x 1.75" Flat Head Phillips Screw,  
316 SS, Qty 16

P 877-768-2717 F 877-276-POOL Outside the US: P +1-949-336-1940 F +1-949-336-1940  
[info@aquastarpoolproducts.com](mailto:info@aquastarpoolproducts.com) [www.aquastarpoolproducts.com](http://www.aquastarpoolproducts.com) CS088-052826