




# INSTALLATION INSTRUCTIONS

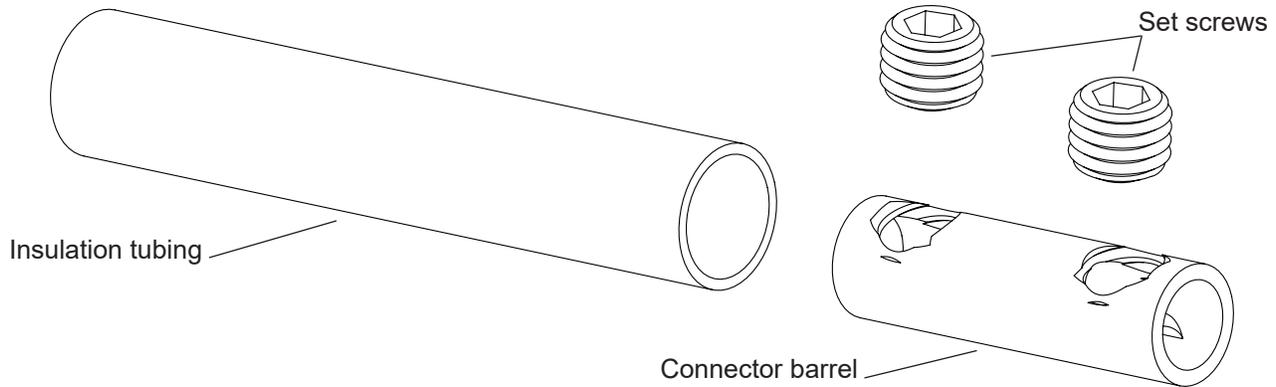

**WARNING:** All accessories must be installed in accordance with the National Electrical Code (NEC) and local codes. Failure to do so will void the warranty and may result in serious injury and/or damage to the luminaire.

**NOTE:** Save these instructions for future reference.

**Voltage & Current Rating: 30V, 25 AMPS**

### Installation Instructions:

1. Before stripping cable ends, slide insulation tubing over cable ends, then along cable out of the way.
2. Strip cable ends approximately 5/8 inch.
3. Insert stripped cable end(s) into either end of the connector barrel.
4. Tighten the set screw using the Allen wrench.
5. Strip other cable end(s), insert into other end of the connector, tighten with Allen wrench.
6. Retighten both set screws with Allen wrench.
7. Slide insulation tubing over brass connector, heat evenly with hand-held torch until tightly sealed.

BSC-01 (small)	Conductor Size	Quantity to Fit
	#12	1
	#14	1
	#16	2
	#18	3

BSC-02 (Medium)	Conductor Size	Quantity to Fit
	#8	1
	#10	2
	#12	3
	#14	4
	#16	6
	#18	8

BSC-03 (Large)	Conductor Size	Quantity to Fit
	#8	2
	#10	4
	#12	6
	#14	8
	#16	12
	#18	16