



Slice Gate Valves - PVC

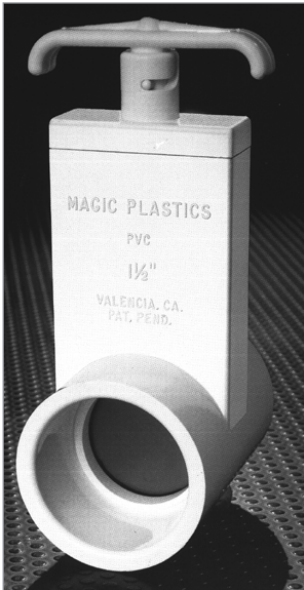

SGV - SL Series

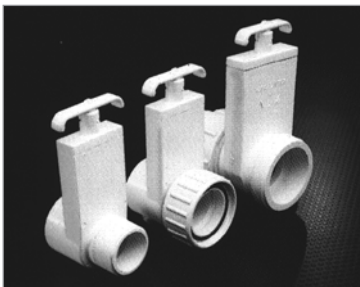

SGV-Sp and SGV-SLU Series

PVC Slice Gate Valve Features:

- One piece "Uni-Body" PVC Construction. Guaranteed NO HUB LEAKS or loose bolts.
- 1/4 turn "Cam-Lock" for 100% shut-off..
- Internal "snap-lock" feature ensures valve will remain totally open, providing 100% flow with no restriction.
- Stainless steel shaft prevents rust and corrosion.
- Glass filled poly-pro tapered gate design for 100% sealing.
- Integrally molded seal on gate. - No pinched or torn gaskets.
- Seals are "Santoprene" that have been impregnated with a permanent lubricant. Never needs lube yet will provide continuous smooth operation. Ozone and chemical resistant for much longer life.
- Santoprene buttons on gate provides smooth operation without sticking.
- Every valve water tested at 100PSI and random quick burst tested at 400 PSI. Virtually no chance of leaky valves in the field at standard operating pressures.
- Maximum recommended operating pressure is 50 PSI.
- Glue wells on all slip-socket configuration catches excess glue during plumbing.
- Constructed and tested for use in pool & spa applications.
- Made in USA



Part Number	Size	Description	Ctn/Case Qty	List Price
SGV150SL	1 1/2"	Slip x Slip	14/56	\$ 22.87
SGV200SL	2"	Slip x Slip	12/48	24.18
SGV250SL	2 1/2"	Slip x Slip	5/20	51.29
SGV150SP	1 1/2"	Slip x Spigot	14/56	21.50
SGV200SP	2"	Slip x Spigot	12/48	24.18
SGV150SLU	1 1/2"	Slip x Slip with Union	10/40	37.01
SGV200SLU	2"	Slip x Slip with Union	10/40	44.86