




Check Valves - Flo Control

PVC Spring Check Valve Features:

- To stop backflow and syphoning.
- All water applications.
- Maintenance free operation.
- Tapered valve body design & enlarged valve chamber reduces chatter & turbulence.
- Raised radius valve seat, EPDM Seal for positive seal.
- Stainless steel spring load of 1/2 lb. or 2 lb.
- Solvent weld or male and female thread connections.
- 200 P.S.I. static pressure rating @ 72° F.
- Excess solvent cement trap - Designed to help prevent excess cement or softened material from entering into the body and sealing area during installation.
- NSF/ANSI 61+372.

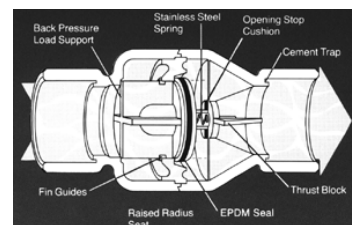

1001, 1011, 1012 Series

NSF/ANSI 61+372



1011C Series

NSF/ANSI 61+372

NSF/ANSI 61+372



1800 Series (hex and round)

Part Number	IPS Size	Body Length	Ctn Qty	List Price
PVC Spring Check Valves (fip x fip)				Spring Tension 1/2 lb
1001-05	1/2"	4-1/8"	20	\$ 22.87
1001-07	3/4"	4-1/8"	20	23.73
1001-10	1"	5-1/4"	20	33.98
1001-12	1-1/4"	6-3/16"	15	45.87
1001-15	1-1/2"	6-3/16"	15	48.89
1001-20	2"	7"	10	70.32
PVC Spring Check Valves (slip x slip)				Spring Tension 1/2 lb
1011-05	1/2"	4-1/8"	20	22.93
1011-07	3/4"	4-1/8"	20	23.73
1011-10	1"	5-1/4"	20	34.40
1011-12	1-1/4"	6-3/16"	15	45.87
1011-15	1-1/2"	6-3/16"	15	48.89
1011-20	2"	7"	10	70.32
1011-25	2 1/2"		8	108.00
1011-30	3"		8	126.63
Clear				
1011C-15	1-1/2"	6-3/16"	10	63.16
1011C-20	2"	7"	10	82.08
PVC Spring Check Valve, (slip x slip)				Spring Tension 2 lbs.
1012-10	1"		20	35.53
1012-12	1-1/4"		15	47.36
1012-15	1-1/2"		15	50.47
1012-20	2"		10	72.63
Foot Valve Screen (polyethylene, 100 mesh)				
1800-07	3/4" hex style	2-2/5"	1	3.96
1800-10	1" round style	2-4/5"	1	4.60
1800-12	1-1/4" hex style	3"	1	6.58
1800-15	1-1/2" round style	3-2/5"	1	7.95
1800-20	2" round style	3-4/5"	1	9.22