



Kit comes palletized on a 7 ft skid.
5 cast rock pieces, weight 1,500 lbs



7 small cast pieces, 2" pvc for plumbing
column and hollow rocks to hide pipes as
shown below are included in kit. Three
color options.



6" plumbing sleeve for 2" pipe should
be filled with spray foam or mortar
after pipe is set



Tennessee Ledger



shown here in Fieldstone color



#1 Base piece has a 3"
lip as a dripline.

The cap rock #5 was placed on
the boulder to the right in this
install.

Wedge piece is shown between
left boulder and center base
piece, not used in a radius
application. The 3 large boulders
and the ledger piece can be
moved around as needed.

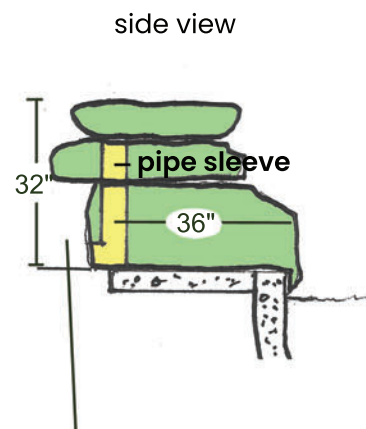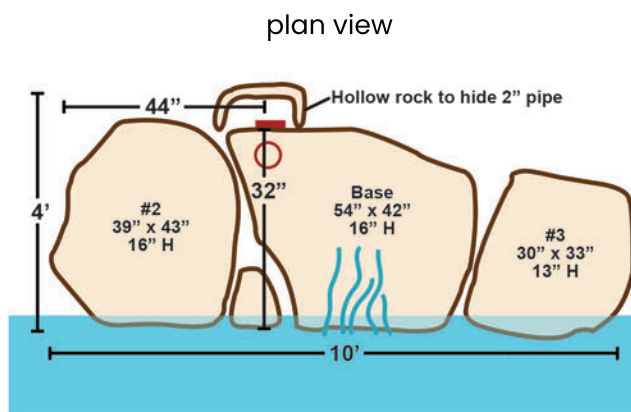

use hollow rock to
hide plumbing in
back

The heaviest piece is about 200
lbs. For pool installations it is
recommended that all cast pieces
be mortared to a concrete deck
and mortared together. Small
pieces can be secured with
construction adhesive.

