

4


3

2

1


REV	ECO	REV BY	DATE	APPD	DATE
D	0025584	J.AGUILERA	04-25-2012	R.RASCON	04-25-2012

D

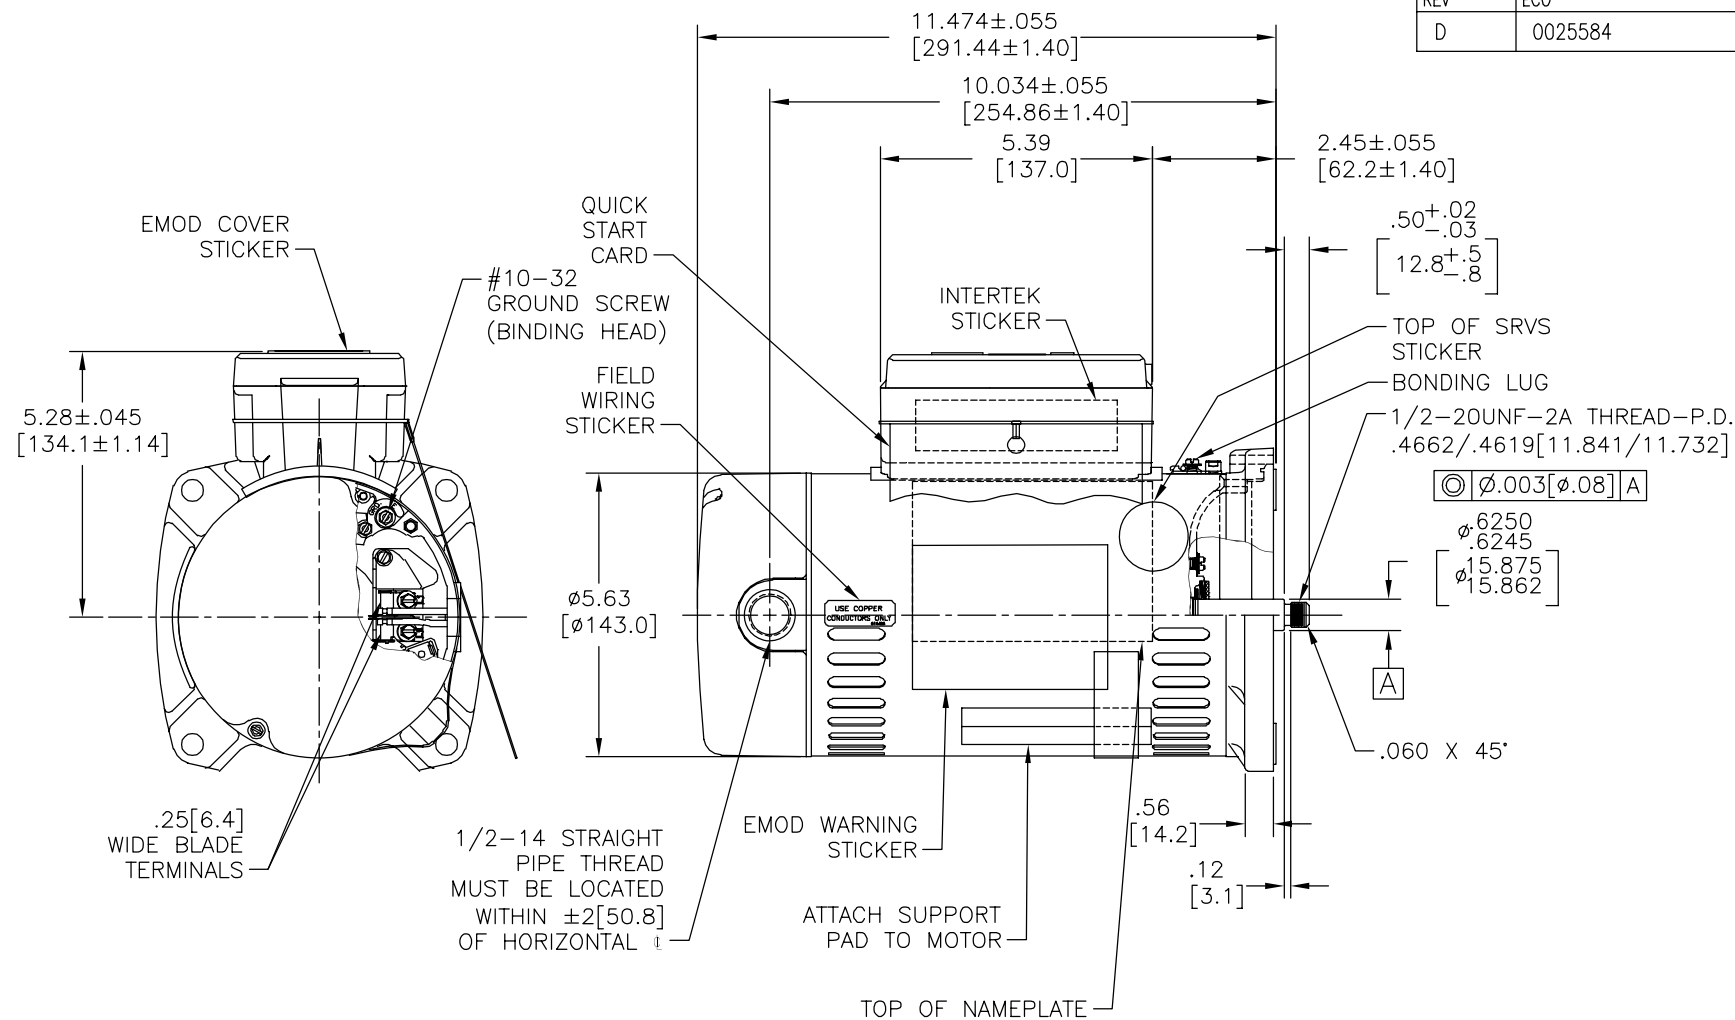

D

C

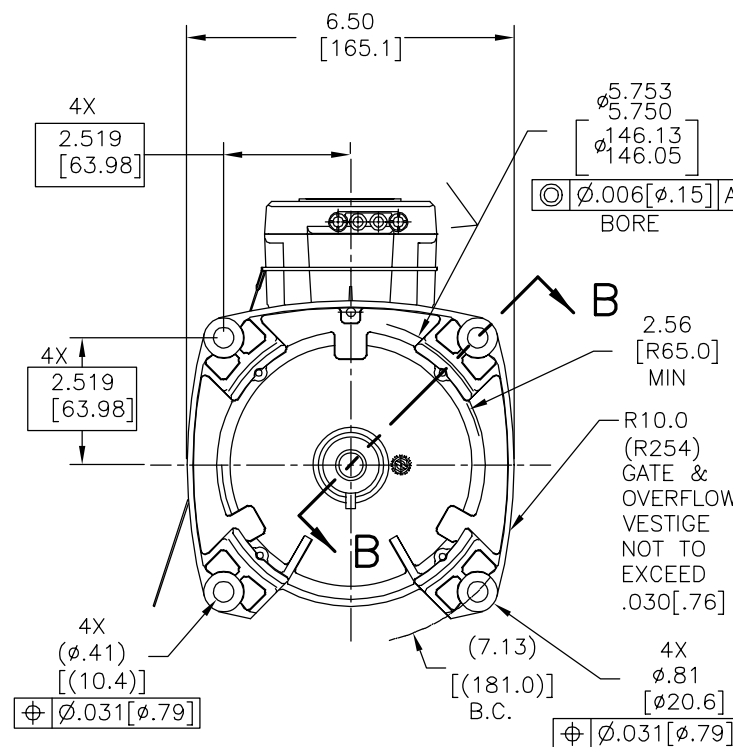

C

B

NAMEPLATE DATA	EXTERNAL CONNECTION DIAGRAM	NOTES
MODEL: C48AA44A01 CUST PN: USQG1072A HP: 3/4 SF: 1.27 ROT: CCWPE RPM: 3450 TYPE: UAC CODE: L FORM: FRAME: 48 Y VOLTS: 115/230 AMPS: MAX AMPS: 13.4/6.7 SF AMPS: - PH: 1 HZ: 60 INS: B AMB: 50°C DUTY: CONT ENCLOSURE: ODP THERMALLY PROTECTED	<p>GRD GREEN (GROUND)</p> <p>HIGH VOLTAGE SHOWN. ROTATE DIAL CCW TO 115 FOR LOW VOLTAGE.</p> <p>USE COPPER CONDUCTORS ONLY. INSTALL MOTOR WITH VENTS DOWN. ACCEPTABLE FOR FIELD WIRING.</p>	1. FINISH PAINT TO BE SATIN BLACK. 2. .44 [11.2] WRENCH FLATS ON SHAFT-FOR ACCESS TO THIS WRENCH FLAT REMOVE END COVER. 3. STAINLESS STEEL SHAFT EXT. 4. LIMITS ON AMPLITUDE OF VIBRATION MEASURED AT BEARING HOUSING = .001. 5. CONNECTED FOR 230 VOLTS. QUICK VOLTAGE CHANGE DIAL INCLUDED ON THE TERMINAL BOARD.

B

A

PERFORMANCE CURVE	APPROVED SAMPLE	GEOMETRIC CHARACTERISTICS & SYMBOLS	UNLESS OTHERWISE SPECIFIED DIM. TOLERANCES ARE AS FOLLOWS:	DR BY: JAH	03-24-09	DESCRIPTION
C48J2W41		□ FLATNESS — STRAIGHTNESS ∠ ANGULARITY ⊥ PERPENDICULARITY (SQUARENESS) // PARALLELISM ○ ROUNDNESS (CIRCULARITY) ⊙ CYLINDRICITY △ PROFILE OF ANY SURFACE ⌒ PROFILE OF ANY LINE ↗ RUNOUT ⊕ TRUE POSITION ⊙ CONCENTRICITY ≡ SYMMETRY	INCH ±.1 ±.02 ±.005 ±.0005 mm ±0.5 ±0.13 ±0.013 ANG. ±.50 DEG REMOVE BURRS & BREAK SHARP EDGES: INCH .003-.015 mm 0.1-0.4 CORNER FILLETS TO: INCH .020 mm 0.5 MACHINE SURFACES: INCH 125 mm 3.2	APPD:		MODEL-PFHP-48FR OUTLINE
UL COMPONENT	CSA			THIRD ANGLE PROJECTION	EDS DATE 11-11-2011 FORMAT REV G	SIZE C DWG NO USQG1072A
FILE#	CCN#	FILE#	GUIDE#			SCALE NONE SHEET 1
PENDING	PENDING	PENDING	PENDING			
CUSTOMER	DISTRIBUTION SERVICES					

A

4



3



2

1

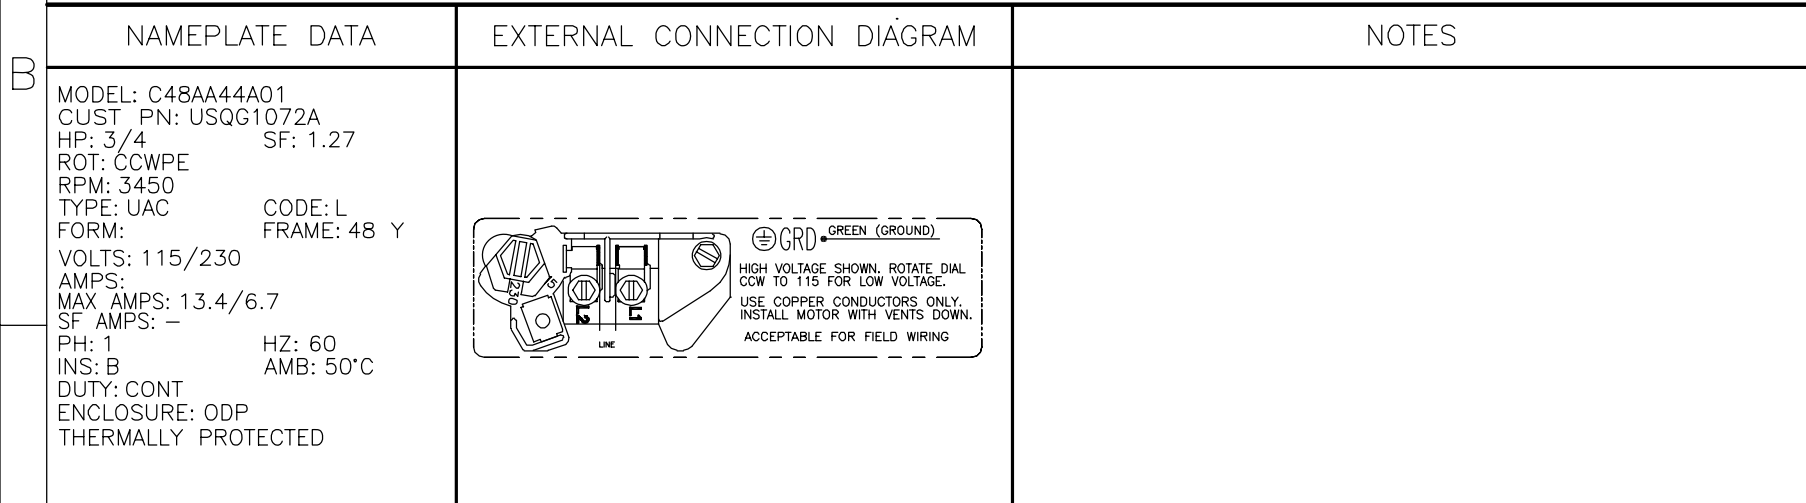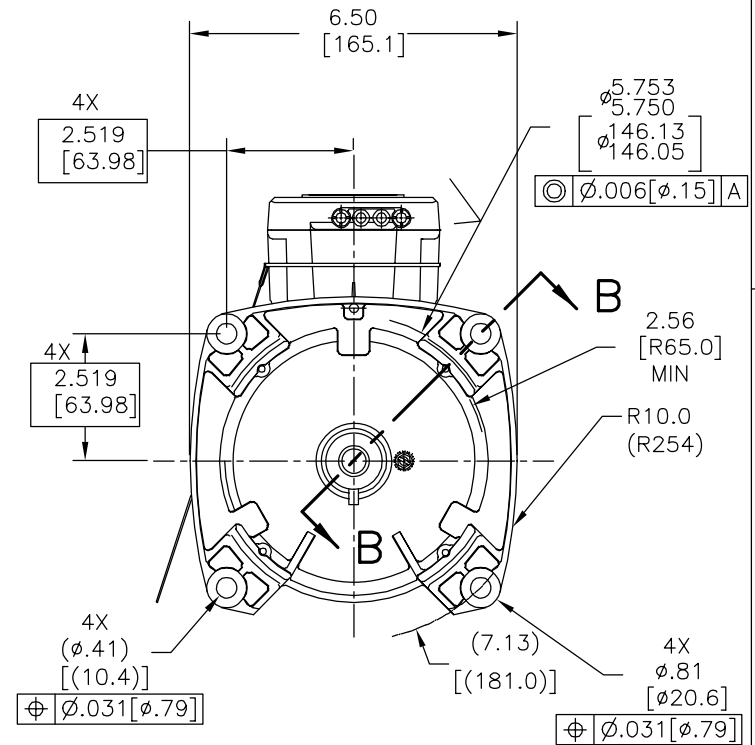

版本	ECO	编制	日期	批准	日期
D	0025584	J.AGUILERA	04-25-2012	R.RASCON	04-25-2012



A	PERFORMANCE CURVE		APPROVED SAMPLE		形位公差 □ 平面度 — 直线度 ∠ 倾斜度 ⊥ 垂直度 ∥ 平行度 ○ 圆度 ⊗ 圆柱度 △ 面轮廓度 ⊙ 线轮廓度 ↻ 圆跳动 ⊕ 位置度 ◎ 同轴度 ≡ 对称度	除另有注明 尺寸公差如下: 英寸 X ±.1 XX ±.02 XXX ±.005 XXXX ±.0005 毫米 ±0.5 ±0.13 ±0.013 角度 ±.50 度 清理毛刺和尖棱 英寸 .003-.015 毫米 0.1-0.4 内圆角 英寸 .020 毫米 0.5 表面粗糙度 英制 125 米制 3.2 米制尺寸显示在 [ ]	绘图: JAH	03-24-09		名称 MODEL-PFHP-48FR OUTLINE			
	C48J2W41						批准:				第三角投影  图纸格式发布日期 11-11-2011 图纸格式版本 G	图幅 C 图号 USQG1072A	
	UL COMPONENT		CSA				机密: 本图纸及相关信息所有权归REGAL-BELOIT CORPORATION. 未经REGAL-BELOIT CORPORATION书面授权, 不得泄露、 复制、传播或作其他用途。一版权所有						比例 NONE 页号 1
	FILE#	CCN#	FILE#	GUIDE#									
	PENDING	PENDING	PENDING	PENDING									
CUSTOMER		DISTRIBUTION SERVICES				ASME Y14.5M 1994							