

9" SQUARE WAVE ANTI-ENTRAPMENT SUCTION OUTLET COVER, VENTED RISER RING AND MUD FRAME



**VGBA CERTIFIED
SPECIFICATIONS**

Open Area
48.4 in²

For SOFA Specific Flow Ratings and
specifications please scan QR code or visit
www.aquastarpoolproducts.com/flowcode



FEATURES

Certified, Listed, and Labeled in
conformance with APSP/ANSI/ICC-16 2017
and NSF/ANSI/CAN 50 standards

Easily and safely retrofits to 9" square
¾" deep frames

Manufactured from superior
UV-resistant engineered polymers

#316 stainless steel screws

Trademarked VGBA compliance button
easily identifies VGBA 2017 compliant cover
from on deck and underwater


Online product support including
downloadable CAD files, General Certificate
of Conformity, third-party certificate,
installation instructions and more

Replace drain cover every five years from
the date of installation

See next page for additional product
configurations

8 per case

U.S. Patent www.aquastarpoolproducts.com/patents


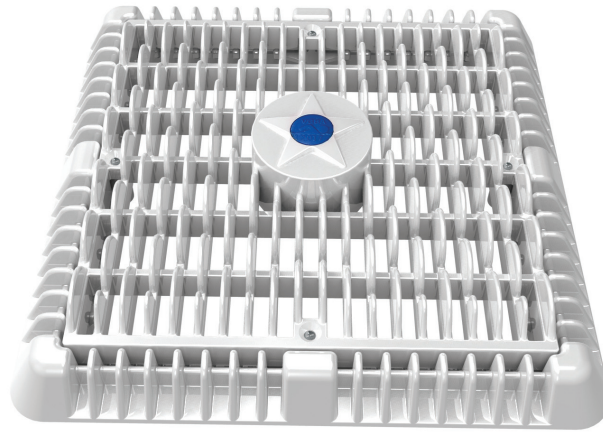


Part # WAV9WRxxx

Designed to replace standard 9" square covers
that have a 8¼" center-to-center screw hole
measurement with ¾" deep existing frames

STANDARD COLORS

- ☐ WAV9WR101 – White
- ☐ WAV9WR102 – Black
- ☐ WAV9WR103 – Light Gray
- ☐ WAV9WR105 – Dark Gray
- ☐ WAV9WR108 – Tan

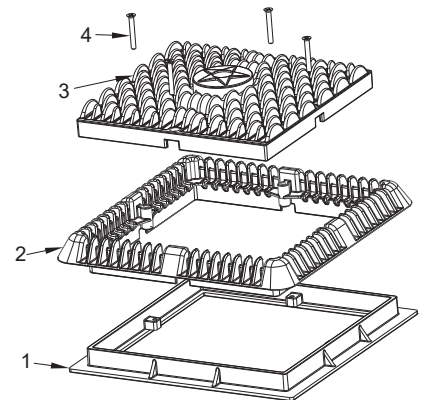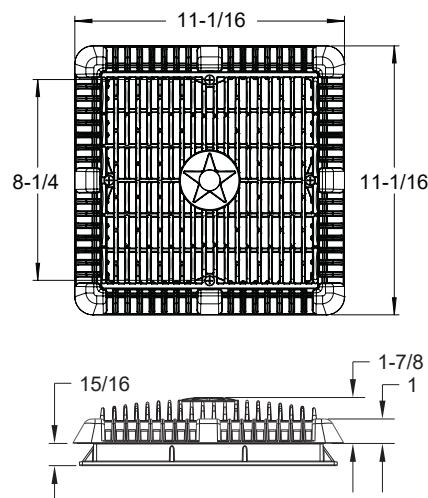

1. 9" Square Mud Frame
2. 9" Square Riser Ring
3. 9" Square "Wave" Suction Outlet Cover
4. #10 x 1.75" Flat Head Phillips Screw,
316 SS, Qty 4

VGBA 2017 Compliant

P 877-768-2717 F 877-276-POOL Outside the US: P +1-949-336-1940 F +1-949-336-1940
info@aquastarpoolproducts.com www.aquastarpoolproducts.com CS089-013125

6" Socket Deep PVC Sump

NSF



Certified to
NSF/ANSI/CAN 50
ANSI/APSP/ICC-16 2017

Open Area
48.4 in²

For SOFA Specific Flow Ratings and
specifications please scan QR code or visit
www.aquastarpoolproducts.com/flowcode



Part #
WAV9WRxxxF
2 per case

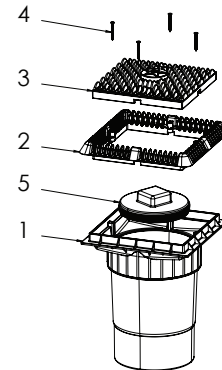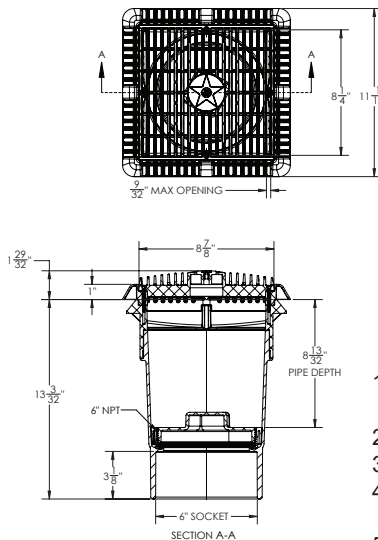

1. 9" Round Double Deep PVC Sump Bucket W/6" Socket
2. 9" Square Riser Ring
3. 9" Square "Wave" Suction Outlet Cover
4. #10 x 1.75" Flat Head Phillips Screw, 316 SS, Qty 4
5. Plus 6" NPT


3" Socket x 4" Spigot Side Port PVC Sump

NSF

Certified to
NSF/ANSI/CAN 50
ANSI/APSP/ICC-16 2017

Open Area
48.4 in²

For SOFA Specific Flow Ratings and
specifications please scan QR code or visit
www.aquastarpoolproducts.com/flowcode



Hassle-free pressure testing
and winterizing





Part #
WAV9WRxxxSSB
1 per case

Hassle-free pressure testing and winterizing
Comes with a 3" and 2" NPT cap with O-ring. No knock-outs required. For replacement plug kit p/n SSBPK

NEW

Optional 2" hydrostatic relief valve available p/n HVK101

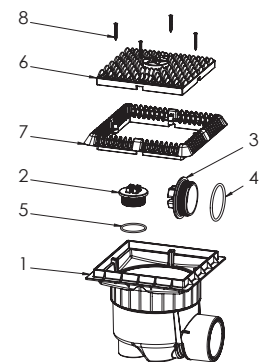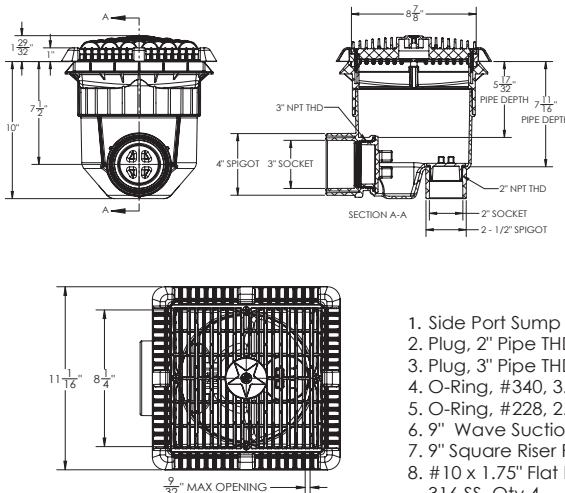

1. Side Port Sump Bucket, 9" Square Frame
2. Plug, 2" Pipe THD.
3. Plug, 3" Pipe THD.
4. O-Ring, #340, 3.350" ID x .210" THK., EPDM
5. O-Ring, #228, 2.25" ID x .125" THK., EPDM
6. 9" Wave Suction Outlet Cover
7. 9" Square Riser Ring
8. #10 x 1.75" Flat Head Phillips Screw, 316 SS, Qty 4