# 12" SQUARE MOFLOW® SUCTION OUTLET COVER AND MUD FRAME



Certified to NSF/ANSI/CAN 50 ANSI/APSP/ICC-16 2017 Open Area 71.2 in<sup>2</sup>

For SOFA Specific Flow Ratings and specifications please scan QR code or visit www.aquastarpoolproducts.com/flowcode



### **FEATURES**

Certified, Listed, and Labeled in conformance with APSP/ANSI/ICC-16 2017 and NSF/ANSI/CAN 50 standards

Easily and safely retrofits to 12" square 3/4" deep frames

#316 stainless steel screws

Manufactured from superior UV-resistant engineered polymers

Trademarked VGBA compliance button easily identifies VGBA 2017 compliant cover from on deck and underwater

Online product support including downloadable CAD files, General Certificate of Conformity, third-party certificate, installation instructions and more

Replace drain cover every five years from the date of installation

See next page for additional product configurations

8 per case







## Part # 12MFxxx

Designed to replace standard 12" square covers that have a 11¼" center-to-center screw hole measurement with ¾" deep existing frames

#### STANDARD COLORS

- 12MF101 White
- 12MF102 Black
  - 12MF103 Light Gray
- 12MF105 Dark Gray
  - 12MF108 Tan







- 1. 12" Square Mud Frame
- 2. 12" Square MoFlow Suction Outlet Cover
- 3. 10 x 3/4" Flat Head Phillips, 316 SS, Qty 4

## 6" Socket Deep PVC Sump




## **Open Area** 71.2 in<sup>2</sup>

For SOFA Specific Flow Ratings and specifications please scan QR code or visit www.aquastarpoolproducts.com/flowcode





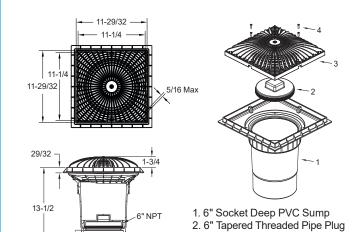

.280 Min

6" Socket

3" Socket x 4" Spigot Side Port PVC Sump



Part #

12MFxxxSSB

1 per case

Part #

12MFxxxF 1 per case

> Certified to NSF/ANSI/CAN 50 ANSI/APSP/ICC-16 2017

**Open Area** 71.2 in<sup>2</sup>

3-1/8

For SOFA Specific Flow Ratings and specifications please scan QR code or visit www.aquastarpoolproducts.com/flowcode

3. 12" Square MoFlow Suction Outlet Cover

4. 10 x 3/4" Flat Head Phillips, 316 SS, Qty 4



Hassle-free pressure testing NEW and winterizing



testing and winterizing Comes with a 3" and 2" NPT cap with O-ring.


No knock-outs required. 2" Plug and O-Ring, p/n 2SBP101 3" Plug and O-Ring, p/n 3SBP101


hydrostatic relief

valve available

p/n HV101

2-11/16 3" NPT 12-1/8 4" Spigot NPT 3" Socket 2" Socket - 2-1/2" Spigot Optional 2"





2. 2" Plug O-Ring

3. 2" NPT Plug 4. 3" Plug O-Ring

5. 3" NPT Plug

6. 12" Square MoFlow Suction Outlet Cover

7. 10 x 3/4" Flat Head Phillips, 316 SS, Qty 4