6" Socket Deep PVC Sump

NSF Certified to NSF/ANSI/CAN 50 ANSI/APSP/ICC-16 2017

Open Area
71.2 in²

For SOFA Specific Flow Ratings and specifications please scan QR code or visit www.aquastarpoolproducts.com/flowcode

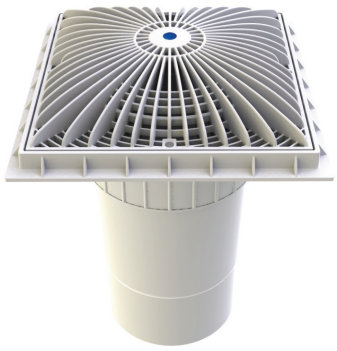

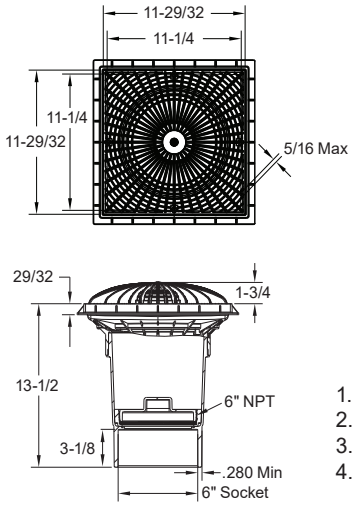

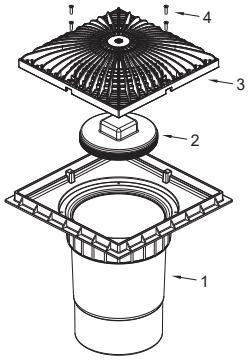

1. 6" Socket Deep PVC Sump
2. 6" Tapered Threaded Pipe Plug
3. 12" Square MoFlow Suction Outlet Cover
4. 10 x 3/4" Flat Head Phillips, 316 SS, Qty 4

Part #
12MFxxxF
1 per case

3" Socket x 4" Spigot Side Port PVC Sump

NSF Certified to NSF/ANSI/CAN 50 ANSI/APSP/ICC-16 2017

Open Area
71.2 in²

For SOFA Specific Flow Ratings and specifications please scan QR code or visit www.aquastarpoolproducts.com/flowcode

NEW Hassle-free pressure testing and winterizing

Hassle-free pressure testing and winterizing
Comes with a 3" and 2" NPT cap with O-ring.
No knock-outs required.
2" Plug and O-Ring, p/n 2SBP101
3" Plug and O-Ring, p/n 3SBP101

Optional 2" hydrostatic relief valve available p/n HV101



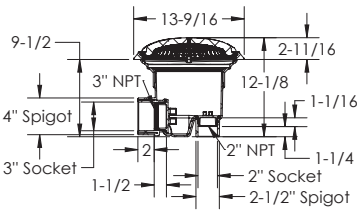



1. Side Port Sump Bucket, 12" Square Frame
2. 2" Plug O-Ring
3. 2" NPT Plug
4. 3" Plug O-Ring
5. 3" NPT Plug
6. 12" Square MoFlow Suction Outlet Cover
7. 10 x 3/4" Flat Head Phillips, 316 SS, Qty 4

Part #
12MFxxxSSB
1 per case