32" CHANNEL DRAIN FLAT GRATE ANTI-ENTRAPMENT SUCTION OUTLET COVER AND PVC THREE-PORT MANUFACTURED SUMP





VGB CERTIFIED **SPECIFICATIONS**

Floor Flow Rating

Wall Flow Rating

Sump Depth

Open Area 25.9 in²

316 GPM at 3.9 fps

208 GPM at 2.6 fps

Use sump included

FEATURES

All components meet or exceed ANSI/APSP 16-2011 and NSF/ANSI 50-2009a national standards and ASTM G154 UV testing

Three ports: bottom 21/2" OD, 2" ID S/S; inside 2" threaded FPT; two 2" threaded plugs included

Strong PVC sump does not require transitional

Designed for use with 2" hydrostatic relief valve part #HVxxx (see page 103)

Disposable plastic pre-gunite/plaster insert keeps debris out and retains sump shape during construction

#316 stainless steel screws

Manufactured from superior **UV-resistant engineered polymers**

Online product support including downloadable CAD files, General Certificate of Conformity, third-party certificate, installation instructions and more

Replace drain cover every five years from the date of installation

4 per case

U.S. patent 20140157510

Unblockable!

NEW Improved water stop and sump design





NEW Water Stop and Textured Sump



With sump (concrete pools) Part # 32CDFLxxx

STANDARD COLORS

32CDFL101 - White

32CDFL102 - Black

32CDFL103 - Light Gray

32CDFL104 - Blue 32CDFL105 - Dark Gray


32CDFL108 - Tan

Also available as sump only p/n 32CDPxxx

4 per case

Also available cover only without sump/frame p/n 32CDFLNFxxx 24 per case

VGB 2008 Compliant

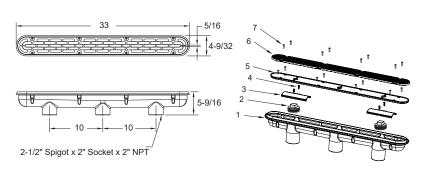

- 1. 32" Three-Port PVC Sump
- 2. 2" Tapered Threaded Pipe Plug, Qty 2
- 3. Port Divider
- 4. 8 x 1/2 Pan Head Philips, 316 SS, Qty 4
- 5. 32" Channel Drain Plaster Shield
- 6. 32" Channel Drain Flush Cover
- 7. 10 x 3/4" Flat Head Phillips, 316 SS, Qty 16

Plaster Shield And Screws To Be Removed After Gunite/Plaster Application