32" CHANNEL DRAIN PINHOLE ANTI-ENTRAPMENT SUCTION OUTLET COVER AND THREE-PORT PVC MANUFACTURED SUMP





Open Area 13.46 in²

For SOFA Specific Flow Ratings and specifications please scan QR code or visit www.aquastarpoolproducts.com/flowcode



FEATURES

Certified, Listed, and Labeled in conformance with APSP/ANSI/ICC-16 2017 and NSF/ANSI/CAN 50 standards

Three ports: bottom 2½" OD, 2" ID S/S; inside 2" threaded FPT; two 2" threaded plugs included

Strong PVC sump does not require transitional glue

Designed for use with 2" hydrostatic relief valve part #HVxxx (see page 45)

Disposable plastic pre-gunite/plaster insert keeps debris out and retains sump shape during construction

#316 stainless steel screws

Manufactured from superior UV-resistant engineered polymers

Online product support including downloadable CAD files, General Certificate of Conformity, third-party certificate, installation instructions and more

Replace drain cover every five years from the date of installation

4 per case

NOTICE: White assemblies will come with a white PVC sump, all other colors are shipped with a medium gray sump

U.S. Patent www.aquastarpoolproducts.com/patents

Unblockable!

NEW Cover now conceals existing sump



Water Stop and Textured Sump



Plaster Shield

Pool Finish

Water Stop

Textured Surface

Gunite

Pipe

With sump (concrete pools)
Part # 32CDPHxxx

STANDARD COLORS

32CDPH101 – White


32CDPH103 – Light Gray

32CDPH105 – Dark Gray

Also available as sump and screws only, p/n 32CDPKxxx 4 per case

Also available cover and screws only, without sump/frame p/n 32CDPHNFKxxx 40 per case

VGBA 2017 Compliant

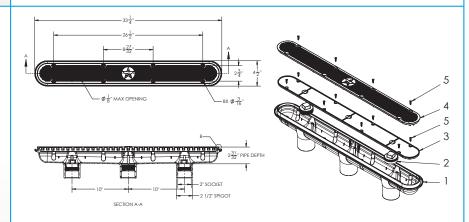

- 1. 32" PVC 3-Port Sump
- 2. 2" NPT Plug, Qty 2
- 3. 32" Channel Drain, Plaster Shield
- 4. 32" Channel Drain Anti-Entrapment Suction Outlet "Pinhole" Cover
- 5. #10 X 3/4" LG. Flat Head Phillips, Type A Screw, 316 SS, Qty 16

Plaster Shield and Screws to be Removed After Gunite/Plaster Application