

# PROSTAR MISCELLANEOUS REPLACEMENT PARTS

## Brass Inserts with Stainless Steel Screws for Suction Outlet Retrofits

Custom brass cement anchors (4); and stainless steel #316 pan head machine screws (4)

Mount, drill and epoxy directly into pool finish using a 5/16" masonry drill bit and two-part wet/dry epoxy

Install with accompanying stainless steel #316 pan head machine screws

No need to use existing frame

Perfect for odd-sized sumps or non-structural frames/sumps

Use with four outside holes on p/n 914xxx for sumps/frames up to 13"


Use with four outside holes on p/n 1216xxx for sumps/frames up to 15"

Use with three outside frame holes on p/n A10RCFRxxx for sumps/frames up to 10"

Set of 4, 1 set per case



Part # BIK4 (4-pack)

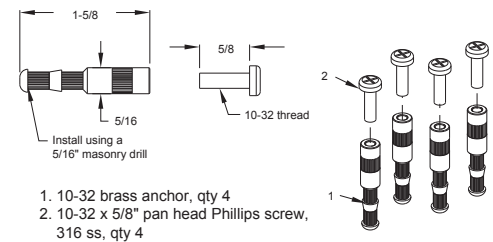

To retrofit all existing sumps/frames up to 15", anchor directly into the pool finish using the extra holes on 1216xxx, 914xxx or A10RCFRxxx

## Pump Strainer Cover, Thread Style


Universal lid adapts to other brands' pumps, replaces p/n SPX3100D

Manufactured from superior UV-resistant engineered polymers

25 per case



Part # HWPL100

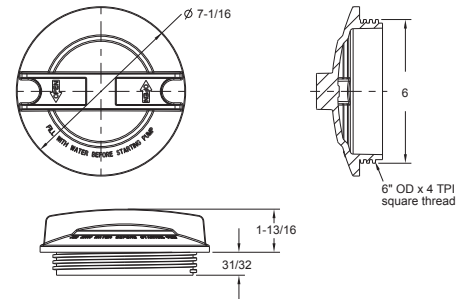

## Socket and Jet Removal Tool for Most Major Brand Return Fittings

Perfect for homeowners and pool service professionals to make adjustments to jet or directional eyeball locking ring

Manufactured from super strong GF nylon


Two size hex sockets on end of wrench allow for jet removal or adjustment of most styles

Fits most adjustable eyeball locking rings

25 per case



Part # VSJW102

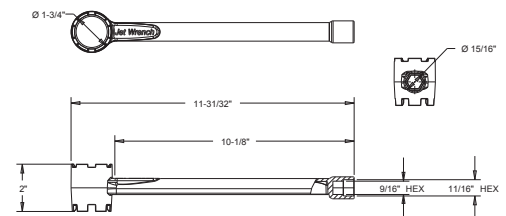

## T-Wrench

Helps install and remove 2" MPT PVC plugs

For use with 8SBP which comes with the FCxxx, 32" channel drains and all 8" sump buckets

NSF-approved materials

25 per case



Part # FC16102

