## EAST COAST FACTORY COLORS AVAILABLE


SELECT DESIRED COLOR:		
□ IVORY		
☐ TAN		
☐ CAFE		
☐ SILVER SAM		
SELECT DESIRED PAVER OR SLAB SIZE:		
8x8x1-5/8" (200x200x40mm)		
8x12x1-5/8" (200x300x40mm)		
12x12x1-5/8" (300x300x40mm)		
12x24x1-5/8" (300x600x40mm)		
16"x16"x1-5/8" (400x400x40mm)		
24"x24"x1-5/8" (600x600x40mm)		
4x8x1-5/8" (100x200x40mm) (1)		
FINISH:		
POLISHED		


## PACKING:

NOMINAL	SQ.FT.PER	WEIGHT PER
SIZE (in)	PALLET	PALLET
8x8x1-5/8"	160	2870
8x12x1-5/8"	160	2870
12x12x1-5/8"	180	3255
12x24x1-5/8"	120	2160
16x16x1-5/8"	160	2870
24x24x1-5/8"	120	2160
4x8x1-5/8" <sup>(1)</sup>	75	1361

(1) The 4x8 border pavers are machine cut and not dimensionally consistent. Artistic Paver Mfg. recommends these pavers should be used strictly as border material, therefore, not recommended for field material.

## TOP VIEW

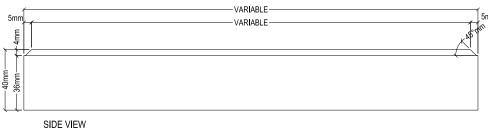

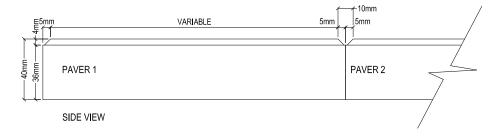

## NOTES

- 1. PAVERS ARE CALIBRATED TO ACHIEVE A UNIFORM THICKNESS OF APPROXIMATELY 1 5/8". DIMENSIONAL TOLERANCE ±1/16".
- 2. PAVERS ARE MANUFACTURED IN METRIC SIZES AND ARE ROUNDED TO THE CLOSEST SIZE EQUIVALENT IN ENGLISH UNITS.
- 3. BECAUSE OF COLOR DYE AND NATURAL RAW MATERIALS INCONSISTENCIES, PRODUCTS WILL HAVE COLOR SHADE AND TEXTURE VARIATIONS.
- 4. DUE TO THE PROCESS REQUIRED TO MANUFACTURE, PACKAGE, DELIVER, UNPACK, INSTALL AND COMPACT, SMALL CHIPPING CAN BE EXPECTED.
- 5. IN SHELLOCK®PAVERS, NATURAL SHELLS ARE EMBEDDED AT DIFFERENT DISTANCES FROM THE SURFACE OF THE MATERIAL, AND THEN POLISHED. THEREFORE, A SMALL PERCENTAGE OF THE SHELLS ARE EXPECTED TO COME LOOSE FROM THE SURFACE AND EDGES OF THE TILE. THIS OCCURRENCE WILL DIMINISH OVER A SHORT SPAN OF TIME AND IN NO WAY WILL AFFECT THE STRENGTH OF THE PRODUCT.
- 6. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH ICPI TECH SPECS 10.
- 7. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
- 8. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.

