

AK STEAM GENERATOR

SPECIFICATION SHEET

MODEL: AK SERIES WITH K60 AND KT60 DIGITAL CONTROLS OR R30K ON/OFF CONTROL AND 3DK AUTO DRAIN

Performance Features of Amerec AX Generators

- Sequential Temperature Control delivers a more consistent flow of Soft Steam and a more stable, comfortable steam bath experience.
- 3 sizes handle a range of steam bath sizes up to 550 cubic feet.
- AK generators can be connected together to heat steam baths larger than 550 cubic feet.
- 240 and 208 volt models can be wired in the field for 1 or 3 phase power.
- Stainless steel tank and water level probes provide years of trouble-free operation.
- Removable heating elements provide easy and economical service.

Codes/Standards

- ETL listed for USA and Canada
- Tested to IEC standards



K60 3-Button Digital Control Features

- 3-button digital control with on/off, temperature and time duration setting.
- Display alternates between ambient room temperature and time remaining.
- Features separate, remote mounted temperature sensor.



KT60 3-Button Digital Control Features

- 3-button digital control with on/off, temperature and time duration setting.
- Display alternates between ambient room temperature and time remaining.
- Features integral temperature sensor.



Sizing and Rough-In Guide

Model	Steam Room Cu Ft				1 Phase		3 Phase	
	Min.	Max.	Voltage	Watts	Amps	Breaker	Amps	Breaker
AK7.5	80	200	240	7500	31	40	18	30
AK7.5	80	200	208	7510	36	50	21	30
AK11	175	375	240	11000	46	60	26	40
AK11	175	375	208	11240	18 & 36	30 & 50	31	40
AK14	350	550	240	14000	21 & 38	30 & 50	34	50
AK14	350	550	208	13580	24 & 42	30 & 50	38	50

To calculate the generator size required, multiply the length x width x height of the steam room.

For rooms made of natural stone, multiply the cubic volume by 1.75 (stone requires more power to heat)

(Maximum recommended ceiling height is 8 feet.)

For rooms exceeding 550 cubic feet, generators may be ganged together to achieve required capacity.

Each generator will require its own power source as described in the chart above.

Example: Room size 750 cu ft, power available 240V 1 phase:

Use two AK11 generators.

Requires one 60A circuit for each AK11 steamer (total of two circuits)

Example: Room size 925 cu ft power available 240V 1 phase:

Use one AK11 (requires one 60A circuit) plus one AK14 (requires 2 circuits, one 30A + one 50A)

One control required, regardless of quantity of generators. Additional controls may be connected

AK steamers are compatible with Amerec's K60 control and or KT60 or R30K control.

Required Steam Head

CFSH, Available in Chrome, Polished Brass, Polished Nickel, Brushed Nickel, Oil Rubbed Bronze, and white.

Electrical Service Information

Dedicated circuit required. See specification chart. All electrical wiring to be installed by a licensed electrician in accordance with local and national codes.

Plumbing Information


- Water Inlet – 3/8" NPT
- Pressure Relief Valve – 3/4" NPT
- Steam Outlet – 1/2" NPT
- Drain Outlet – 3/4" NPT
- Follow local plumbing codes.

Generator Shipping Weight & Dimensions

AK 7.5 - AX 14: 35 Lbs.
Shipping Box: 22" x 20" x 10-1/2"

Installation Information

- Mount in dry, well ventilated area, not exposed to freezing temperatures.
- Mount generator level, on its base or hung on a wall.
- Provide adequate access serviceability.
- Run 3/8" copper cold water line. Install shut off valve, but do not use a saddle valve.
- Run 1/2" copper steam line, insulate lines longer than 20 ft. in length. Slope pipe to avoid condensation build up. Do not create traps.
- Run 3/4" copper pressure relief line and terminate in accordance with local and national codes.
- Run 3/4" copper drain line, sloping pipe to gravity flow drain. Do not terminate drain into the steam room.
- Steam head to be mounted 18" above floor or 6" above rim of bathtub and as far away from seating area as possible.

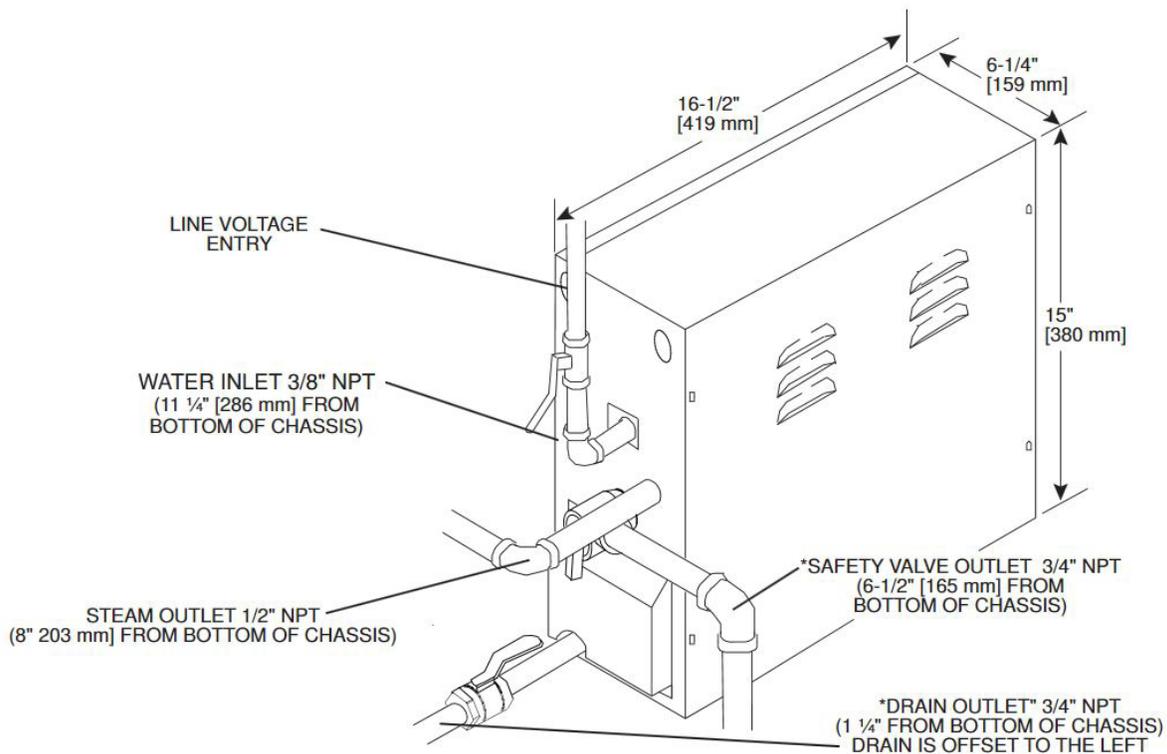

AMEREC
P.O. Box 2258 | 17683 128th Place NE, #C | Woodinville, WA 98072, USA
Toll-Free 1-800-331-0349
amerec@amerec.com | www.amerec.com

Amerrec reserves the right to change specifications and design without notice.
© 2017 Amerrec Steam

01/17

amerec[®]
STEAM. SAUNA. SOLUTIONS.