



Pro400™ TDR/Toner Cable Fault Locator

NEW!



- ◆ Lowest Cost Full Specification Professional Graphical TDR
- ◆ Rugged hand held design weighs less than 12oz (350g)
- ◆ 5 Measurement Ranges up to 6500ft (2000m)
- ◆ 50, 75 & 100 Ohm Selectable Cable Impedance
- ◆ Built in Tone Generator for Wire Tracing and Identification
- ◆ Backlit display screen
- ◆ Water and Dust Proof to IP54
- ◆ Complete with carrying case and test leads


“The smallest graphical TDR in the world”

FEATURES

- ◆ The Pro400™ is a professional Time Domain Reflectometer and Toner designed to detect and locate faults on copper cables up to a distance of 6500ft (2000m).
- ◆ Advanced signal processing techniques enable the Pro400™ to find opens, short circuits, splices, taps, water ingress and other more elusive faults. A built in tone generator also provides a tone for wire tracing and identification.
- ◆ Selectable cable impedance matching, along with variable velocity factor, enable the Pro400™ to be used to test all communication and control cables, with graphical results and fault distances displayed on a dot matrix LCD.
- ◆ The TDR/Fault Finder is housed in a tough, ruggedized ABS plastic case, water and dust proof to IP54, and supplied complete with test leads and a protective tool-belt holster.
- ◆ The Pro400™ is designed and manufactured to international standards for quality, safety and reliability.

SPECIFICATIONS

Ranges @ Vp=70%	20, 45, 90, 180, 360, 750, 1500, 3000 feet	Power Supply	6v 4 x AA cells
Range Selection	Manual range control	Auto Power Down	Selectable 1,2,3 min. or disabled
Resolution	Approximately 1% of range	Operating Temperature	0 to 40 deg. C
Sensitivity	Min. 3 pixel return at 1750 meters	Storage Temperature	-20 to 70 deg. C
Velocity Factor	Adjustable from 1% to 99%	Dimensions	6.5 x 3.5 x 1.5 in (165 x 90 x 37 mm)
Output Pulse	5v p-p into open circuit	Weight	12oz (350g)
Output Impedance	Selectable 50, 75 & 100 ohms	Safety	IEC61010-1
Output Pulse Width	3ns to 3ms	EMC	EN 60950
Scan Rate	2 scans per second	CE compliance with current	BS/EN 61326-1
Tone Generator	Oscillating 810Hz - 1100Hz	Water / Dust Proof	EU directives IP54

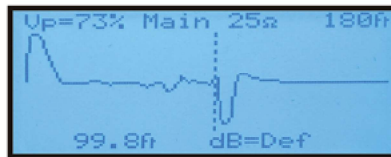

Graphical display of cable faults with digital indication of distance

CE
Compliant



For more information contact:

Armada Technologies

8535 Byron Commerce Dr. SW

Suite A

Byron Center, MI 49315

Phone: (616) 803-1080

Fax: (616) 803-1083

www.armadatech.com