


## RP & EC SERIES

SALT WATER CHLORINATORS

"Simply reliable"



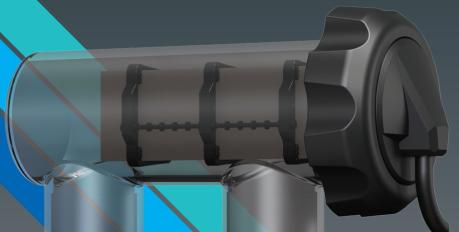



#### **RP & EC SERIES**


SALT WATER CHLORINATORS

### "Simply reliable"

#### CHLORINE PRODUCTION

| MODEL            | PER HOUR           |                                  |                                    | OVER 8 HOURS       |                                  |                                    |
|------------------|--------------------|----------------------------------|------------------------------------|--------------------|----------------------------------|------------------------------------|
|                  | CHLORINE<br>OUTPUT | CAL.HYPO.<br>EQUIVALENT<br>(65%) | SOD.HYPO.<br>EQUIVALENT<br>(12.5%) | CHLORINE<br>OUTPUT | CAL.HYPO.<br>EQUIVALENT<br>(65%) | SOD.HYPO.<br>EQUIVALENT<br>(12.5%) |
| EC2000<br>RP2000 | <b>20</b> g        | 31g                              | 160ml                              | 160g               | 248g                             | 1.28Lt                             |
| EC3000<br>RP3000 | 30g                | 46g                              | 240ml                              | 240g               | 368g                             | 1.92Lt                             |
| EC4000<br>RP4000 | <b>40</b> g        | <b>62</b> g                      | 320ml                              | 320g               | 496g                             | 2.56Lt                             |
| RP5000<br>(comm) | <b>50</b> g        | 77g                              | 400ml                              | 400g               | 616g                             | 3.20Lt                             |

EC is a standard manual cleaning model RP is a self cleaning model

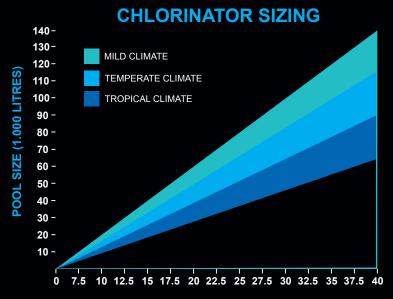

#### **AMOUNT OF CHLORINE REQUIRED PER HOUR** (GRAMS PER HOUR)

#### To calculate the chlorine output required:

- 1. Determine your pool size (litres)
- 2. Move along the horizontal line until you reach your climate zone
- 3. Go down to determine the amount of chlorine you require (g/hr)
- 4. Always allow an extra 10-20%
- 5. In commercial installations allow at least 100% extra

# YOUR LOCAL AGENT

#### **FEATURES**

- As it says "SIMPLY RELIABLE"
- Low salt operation: 3000-3500ppm (0.3%-0.35%)
- Hard / Soft switch for high calcium areas
- Over temp. protection
- Isolation transformer design, approved to AS3108
- Reliable quality automatic timer Premium grade titanium cell
- Over current protection
- Silicon controlled rectification
- Very high chlorine production
- Acrylic weather shield
- High Impact ABS plastic cell housing

NOW WITH IMPROVED HEAT SINKING



YEAR FULL WARRANTY ON POWER PACK



7 City Link Drive, Carrara, QLD 4211 Ph: 07 5522 9763 Email: info@crystalas.com