



ZENITH

SALT AND MINERAL CHLORINATOR



*Whichever comes first in domestic and commercial installations.




ZENITH

SALT AND MINERAL CHLORINATOR

FEATURES:

- The system operates within the range of 3500-4000ppm (0.35%-0.40%) for optimal performance.
- Freshwater model option for those preferring a low TDS concentration of 1500ppm (0.15%) available in ZEN15LS, ZEN25LS and ZEN35LS models.
- A premium-grade titanium cell is included, offering an extended lifespan and enhanced durability. The system incorporates a smart self-cleaning cell electrode ensuring efficient and hassle-free maintenance.
- Additional functions include backwash, super chlorinate, and winter mode, providing versatility for different pool requirements.
- Smart interface that connects to ZENITH pH controller and heat pump signal for pump activation.
- Single or dual timer cycles to suit your specific needs and preferences.
- Includes built-in salt/TDS test, water flow monitoring, and protection mechanism.
- Suitable for all pool surfaces, including concrete, fibreglass, vinyl, and tiled installations.
- Features an automatic battery backup timer for uninterrupted operation.
- Easily navigate and control the system with the backlit LCD interface, which displays detailed operator instructions in a clear manner.
- Smart Wi-Fi and Bluetooth Control at your Fingertips with user friendly App.

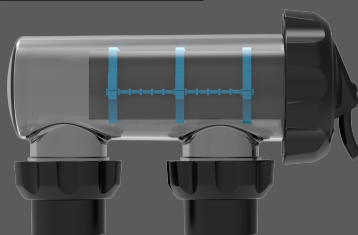


Proven cell design and cell housing, successfully used in the industry since 1992. The ZEN75HD & ZEN100HD models use a longer 3 way housing.



BUILT-IN SMART INTERFACE
with ZENITH pH CONTROLLER***
Model: ZENpH Order Code: CYQ-45-91065

*** SOLD SEPARATELY

SUPERPOOL ZENITH SIZING CHART

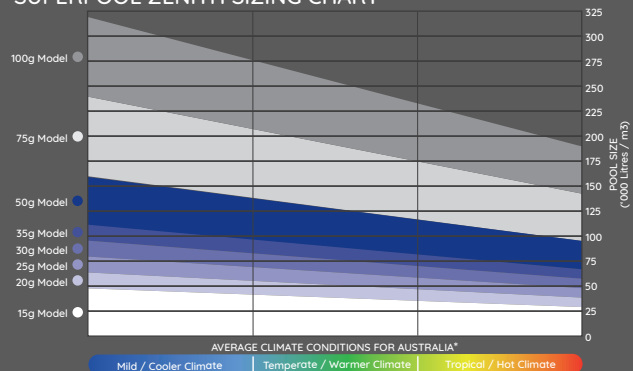

* Sizing Chart provided as a guide only. Consult your local Pool Systems dealer for the correct system, size and specification to suit your needs. In commercial installations allow up to 50% adjustment.

SPECIFICATION TABLE

MODEL	REORDER CODE	Chlorine Output	Input Amps** (Aac)	Input Power (Watts)	Output Volts (Vdc)	Output Amps** (Adc)	Weight (kg)	Dimensions (cm)
ZEN15	CYQ-45-91047	15g/hr	0.86	204.7	7.57	15.0	9.70	46Lx37Wx21H
ZEN15LS	CYQ-45-91070	15g/hr	0.86	204.7	7.57	15.0	9.85	46Lx37Wx21H
ZEN20	CYQ-45-91048	20g/hr	1.02	248.9	7.50	20.0	10.40	46Lx37Wx21H
ZEN25	CYQ-45-91049	25g/hr	1.25	293.0	7.38	25.0	12.30	46Lx37Wx21H
ZEN25LS	CYQ-45-91073	25g/hr	1.25	293.0	7.38	25.0	12.45	46Lx37Wx21H
ZEN30	CYQ-45-91050	30g/hr	1.02	224.0	8.02	15.0	12.50	46Lx37Wx21H
ZEN35	CYQ-45-91056	35g/hr	1.06	244.9	8.02	17.5	12.80	46Lx37Wx21H
ZEN35LS	CYQ-45-91074	35g/hr	1.06	244.9	8.02	17.5	12.95	46Lx37Wx21H
ZEN50HD	CYQ-45-91058	50g/hr	1.58	380.0	8.50	25.0	14.85	46Lx37Wx21H
ZEN75HD	CYQ-45-91062	75g/hr	1.70	450.0	8.50	18.7	18.00	46Lx37Wx21H
ZEN100HD	CYQ-45-91063	100g/hr	1.90	480.0	8.50	25.0	21.00	46Lx37Wx21H

HD model = 15,000hr material. ZEN15-30 available in HD material, add HD after the above REORDER CODE when ordering.
** - all readings taken at 230Vac and in optimum salt water ppm, with a water temperature of 26°C.

 **SUPERPOOL**

POOL
Systems