

DAVEY



DAVEY PowerMaster®

Model Numbers:
PM200, PM250, PM350,
PM450, PM4503

WARRANTY
3 YEARS

APPLICATIONS


Ideal for in-ground and above ground pools, lap pools, concrete and tile pools, fibreglass pools, swim jet installation and in-floor cleaning systems. Models to suit pools up to 170,000 litres.

PROMASTER PREMIUM ENERGY EFFICIENT VARIABLE SPEED PUMP

FEATURES & BENEFITS

- **Double insulated to water circuit** – provided with an Equipotential Bonding Point for AS/NZ 3000 wiring standards
- **Reliable - Constructed of strong corrosion resistant and U.V. materials for long and reliable working life:**
 - Built-in check valve protects pump internals from reverse flows
 - Extra heavy duty, totally enclosed motor protects against the elements for long operating life
 - Built-in thermal overload protects the motor against damage from over-heating
- **TEFC motor** – Totally enclosed fan cooled motor protects against dust and rain from entering the motor internals, this provides superior cooling by recirculating clean air within the pump and increasing motor bearing life in harsh conditions.
- **Long Lasting** – High performance silicon carbide mechanical seal for long life in salt and fresh water
- **Performance** – Powerful pumping delivers optimum flow rates for rapid pool water turnover, with quiet and efficient performance
- **Convenient** – Easy to remove, see through strainer lid for easy removal and cleaning
- Extra large strainer basket allows long intervals between cleaning and rapid priming
- Drain plug enables simple water drainage for easy maintenance
- Three phase model available for commercial pools and aquaculture applications
- 3m power lead with 10amp Australian three pin plug fitted to all single phase models

DAVEY PowerMaster®

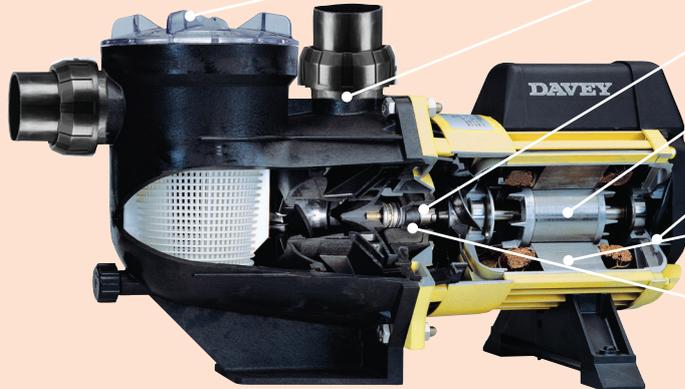

- Easy to remove, see through strainer lid.
- Latest hydraulic design ensures the pump is highly energy efficient and whisper quiet
- Silicon carbide seals for long life in salt and fresh water pools
- Stainless steel motor shaft won't corrode or rust
- Double insulated to water circuit with Equipotential Bonding Point
- Extra heavy duty high performance motor with massive power reserves for extended operating life
- Huge front fan for cool running and long bearing life


ELECTRICAL DATA

Model	PM 200	PM 250	PM 350	PM 450	PM 4503
Voltage (V)	220-240				380-415
Phase	1				3
Supply frequency (Hz)	50				
Start current (A)	27	27	27	40	24
Run current (A)	5.8	6.5	7.7	10.0	3.6
Motor input power (W)	1200	1360	1675	2300	2040
Motor output power (W)	900	1000	1200	1775	1750
RPM	2850				
Enclosure class (IP)	56				
Insulation class	F				
Approval No.	A/10EA				

OPERATING LIMITS


Maximum Water Temperature	50°C
Maximum Ambient Temperature	55°C
dBa @ 1 metre	64 - (PM 200/250/350) 65 - (PM 450/4503)

HYDRAULIC PERFORMANCE

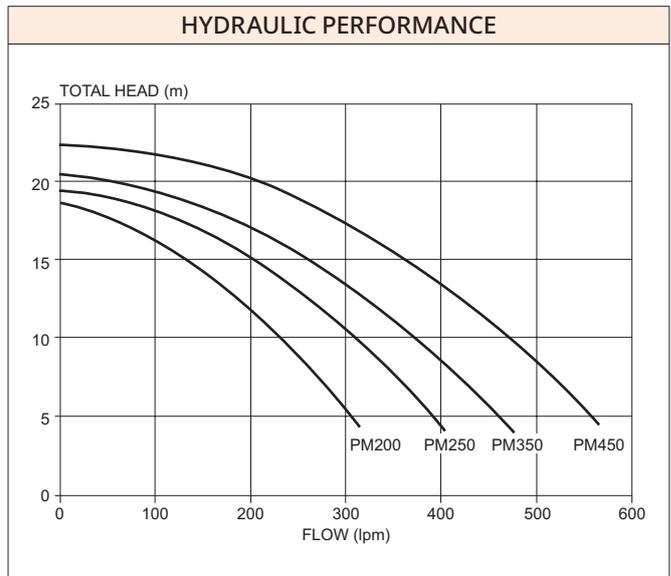

DIMENSIONS (mm)

Model	A	B	C	D	E	Mounting Holes Diameter	Inlet PVC	Outlet PVC	Net Weight (kg)
PM 200	615	330	250	305	246	10	*40/50	*40/50	15.9
PM 250	615	330	250	305	246	10	*40/50	*40/50	15.9
PM 350	615	330	250	305	246	10	*40/50	50	16.0
PM 450/3	665	330	250	305	246	10	50	50	18.0

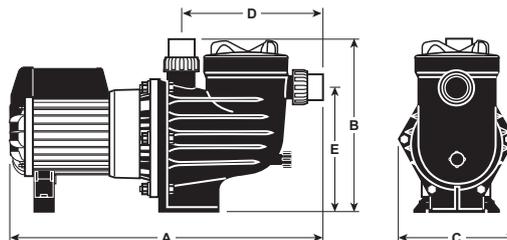

* Suction and delivery accept 40mm PVC pipe on the I.D. and 50mm fitting on the O.D.



daveywater.com

This literature is not a complete guide to product usage. All images provided in this document are for illustration purposes only. Further information is available from your Davey Dealer, Davey Support Centre and from the relevant product Installation and Operating Instructions. Must be read in conjunction with the relevant product Installation and Operating Instructions and all applicable statutory requirements. Product specifications may change without notice. © Davey is a registered trademark of Davey Water Products Pty Ltd. © Davey Water Products Pty Ltd 2025.

