



**VersaChlor**  
SYSTEM II PACKAGE

# Preassembled, Easy to Install and Cyanuric Acid-Free



## THE NEW VERSACHLOR® EASY FEED SYSTEM II FOR COMMERCIAL POOLS AND SPAS

The VersaChlor Easy Feed System II has been totally redesigned for simpler operation. It now features a rugged PVC tablet storage area and a compact footprint 50% smaller than the System I. The new System II will fit in even the most crowded pump rooms.

It comes pre-wired for connection to any ORP controller and has a modular design for easy assembly. The VersaChlor Easy Feed System II is extremely versatile and can be sized for commercial pools and commercial spas.



SKU #9501152

## FEATURES


- VersaChlor Tablets are cyanuric acid free
- VersaChlor E-Z Feed Systems and VC Tabs are available domestically through SCP, SPP and Lincoln Equipment
- The VC System II will be NSF / ANSI Std 50 Listed for use only with VersaChlor Tablets
- The VC System II is expected to be recommended for use with commercial pools up to 150,000 gallons (indoor) and for commercial spas with the separately sold tablet stacking canister

## VersaChlor Tablets

VersaChlor calcium hypochlorite cubes are specially engineered and independently tested by the labs at NSF International to work in VersaChlor easy feed chlorinators in accordance with NSF/ANSI Standard 50. The tablets undergo a multi-step manufacturing and quality control process to ensure they will not soften, break apart or clog the system. VersaChlor cubes contain a scale inhibitor for clean chlorinator operation.



Note: Also NSF/ANSI 60 listed for areas requiring this listing.

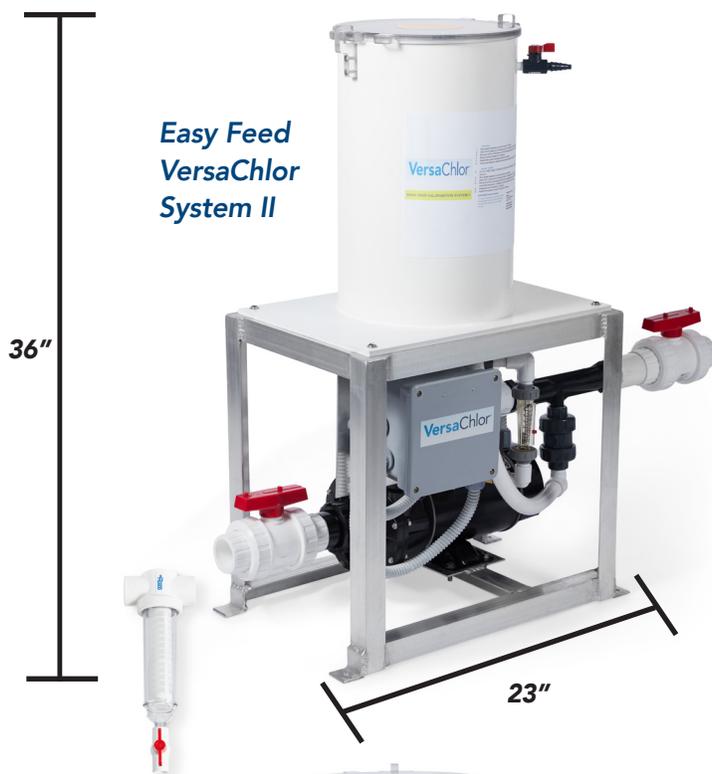

## VersaChlor System II Specifications

**Tablet Storage Capacity:** 40 lb.  
VersaChlor Tablets

**Maximum CL delivery rate:** 1 lb. CL/Hr

**Dry Weight of the System II:** 72 pounds

**Electrical Requirements:** 120 volt, 15 amp  
Power and 120 v ORP /CL2 Controller

**The VersaChlor System II is designed to be used in conjunction with a Cl2 ORP controller**

**A 60 mesh in line strainer is provided for extra filtration on the pool water feed line to the chlorinator**

**The equipment warranty is 18 months from date of shipment to the branch**

## Operation of the VersaChlor System II

Inlet water supply line to the chlorinator and chlorine solution return line are 1.5". The inlet water supply is plumbed after the pool filter. The System II includes a 1.5 HP Hayward pump driving a venturi to pull chlorine solution out of the tablet hopper. Flow through the tablet hopper is manually controlled by adjusting a gate valve located on the inlet to the tablet hopper. The system is pre-wired to accept an on/off run signal from the pool controller ORP.

[www.VersaChlor.com](http://www.VersaChlor.com)

Tablet Insert Canister for use in Commercial Spa applications.

Sold separately.



SKU #9591153



For Technical Assistance Call Commercial Pool Solutions at **866-269-6725**



VersaChlor is a registered ® trademark of Axiall Ohio, Inc.  
Copyright © 2018 Axiall Corporation, Inc.