

F-2000

Digital Paddlewheel Flow Meter



Features

- > Easy to read 8 digit LCD, up to 4 decimal positions
- > Flow rate and Total flow display
- > AC/DC transformer or battery operated (RT models only - 4 AA batteries)
- > Factory programmed with calibration certificate
- > Front panel security lockout
- > 4-20ma and 0-10VDC output models
- > Batch Processing and Flow Rate Alarms

Video link: 

NEMA 4X

Highlights

Flow range

.4 - 8,000 GPM
1 to 27,000 LPM

Pressures

300 PSI
(20 bar)

Pressure drop

0 - 8 PSI
(varies per model)

Full Scale Accuracy

+/- 1%

Power supply

15-24 VDC
115V/230V60z, 220V/50Hz
Battery operated

Warranty

1 Year

Available Models



Molded Fittings



Saddle Mount
Fittings






PVC Fittings



Maximum Working Pressure	300 PSI (20 bar) @ 70 °F (21 °C)
	200 °F (93 °C) @ 0 PSI (PVDF saddles and PP Molded fittings)
Maximum Fluid Temperature	140 °F (60 °C) @ 0 PSI (PVC saddles and PVC Tee fittings)
	NOTE: Temperature rating of F-2000 only. Actual pipe rating may vary.
Maximum Ambient Temperature	14 °F to 110 °F/ -10 °C to 43 °C
Maximum Pressure Drop	up to 8 PSI (varies per model)
Full Scale Accuracy	+/- 1%
Power Requirement	15 VDC Nominal (15 - 24 VDC Absolute)
Model RT units only	4 AA batteries or 15 - 24 VDC plug-in transformer
All units	15 - 24 VDC (plug-in transformer supplied)
Signal Distance	AC sine wave sensor = 200 ft (60 m) Hall Effect sensor = 1 mile (1.6 km)
Signal Cable	3 conductor shielded. Included 25 ft(7.6 m)(Option for 50 ft and 100 ft)
Approximate Shipping Weight	4 lb. (1.8 kg)
Enclosure	NEMA 4X (IP56)
RoHS Compliant	Yes
BABAA Compliant	Yes

Dimensions

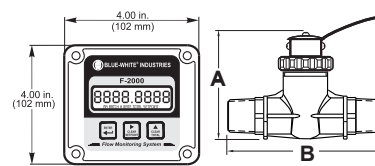

Saddle Fittings		
Pipe Size	A	B
1-1/2"(50mm)	4-1/2"	3-3/16"
2"(63mm)	4-1/2"	3-3/16"
3"(90mm)	4-1/2"	3-3/16"
4"(110mm)	4-1/2"	3-3/16"
6"(160mm)	4-3/8"	3-3/16"
8"(200mm)	4-3/8"	3-3/16"
10"(250mm)	4-1/2"	4-1/2"
12"(315mm)	4-1/2"	4-1/2"

PVC Tee		
Pipe Size	A	B
1"	6"	4"
1-1/2"	6-5/8"	4-1/2"
2"	7-1/8"	4-3/4"


Molded Fittings		
Pipe Size	A	B
3/8"	3-3/4" (95)	4-3/4" (121)
1/2"	3-3/4" (95)	5-1/8" (130)
3/4"	4" (102)	5-1/4" (133)
1"	4" (102)	5-5/8" (143)
1-1/2"	4-1/2" (114)	6-1/2" (165)
2"	4-3/4" (121)	6-3/4" (171)

Performance

Digital Paddlewheel Flow Meter

— PVC Saddles & PVC Tees
— PVDF Saddles & PP Tees

Maximum Temperature vs. Pressure

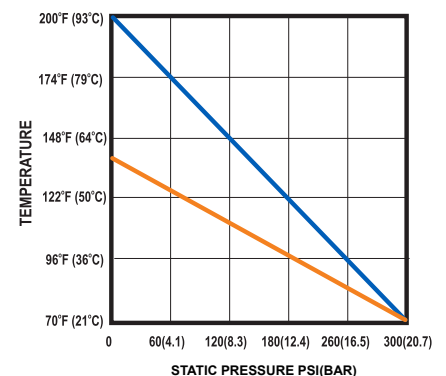

Saddle material:	PVDF (1-1/2", 2", 3", 50mm, 63mm, 90mm sizes) PVC (other sizes)
In-Line Molded Tee:	Polypropylene
Sensor, paddlewheel, axle:	PVDF
Sensor O-ring seals:	FKM (optional EP)

Ordering Information

Molded In-Line Pipe Fittings

Pipe Size M/NPT	GPM Flow Range	LPM Flow Range	M³/HR Flow Range	Fitting Number		Flow Range
				MNPT (MI)	MBSPT (MB)	
3/8"	.8 to 8	3 - 30	0.2 - 1.8	38M1	38MB1	1
3/8"	.4 to 4	1 - 10	0.1 - 0.6	38M2	38MB2	2
1/2"	2 to 20	7 - 70	0.4 - 4.2	50M1	50MB1	1
3/4"	3 -30	11 - 110	0.7 - 6.6	75M1	75MB1	1
1"	5 to 50	20 - 200	1.2 - 12	10M1	10MB1	1
1-1/2"	6 to 60	25 - 250	1.5 - 15	15M2	15MB2	2
2"	10 to 100	40 - 400	2.4 - 24	20M3	20MB3	3
2"	20 to 200	70 - 700	4.2 - 42	20M4	20MB4	4

TEE Pipe Fittings (PVC)

Pipe Size	GPM Range	LPM Range	Fitting Number
			Solvent Weld PVC Tee (AT)
1"	6 to 60	25 - 250	10AT
1-1/2"	15 to 150	60 - 600	15AT
2" *	30 to 300	100 - 1000	20AT
3" *	60 to 600	230 - 2300	30AT

Saddle Mount Pipe Fittings

Pipe Size IPS	GPM Range	M³/HR Flow Range	Material	Fitting Number	
				Sch 40 (S4)	Sch 80 (S8)
1-1/2"	15 to 150	3.5 - 34.5	PVDF	15K4	15K8
2"	30 to 300	6.9 - 69.0	PVDF	20K4	20K8
2-1/2"	40 to 400	9.2 - 92.0	PVC	25A4	25A8
3" *	60 to 600	13.8 - 138	PVDF	30K4	30K8
4" *	100 to 1000	23.0 - 230	PVC	40A4	40A8
6" *	250 to 2500	57.5 - 575	PVC	60A4	60A8
8" *	400 to 4000	92.0 - 920	PVC	80A4	80A8
10" *	600 to 6000	138 - 1380	PVC	100A4	100A8
12" *	800 to 8000	184 - 1840	PVC	120A4	120A8

DIN 8062	LPM	M³/HR Flow Range	Material	Metric PN10 (P0)	Metric PN16 (P6)
50mm	70 to 700	4.2 - 42.0	PVDF	05K0	05K6
63mm *	110 to 1100	6.6 - 66.0	PVDF	06K0	06K6
75mm *	150 to 1500	9.0 - 90.0	PVC	08A0	08A6
90mm *	230 to 2300	13.8 - 138	PVDF	09K0	09K6
110mm *	350 to 3500	21.0 - 210	PVC	11A0	11A6
160mm *	720 to 7200	43.2 - 432	PVC	16A0	16A6
200mm *	1150 to 11500	69.0 - 690	PVC	20A0	20A6
250mm *	1700 to 17000	102 - 1020	PVC	25A0	
315mm *	2700 to 27000		PVC	31A0	

* Not available in GPD (gallons per day) or LPD (liters per day)

F-2000 Model Number Matrix

F-2000

RT	S	B	38	M1	GM	1	-				Sample Model Number																																										
Variations RT = Flow Rate and Totalizing AO = Analog Output, Flow Rate and Totalizing PC = Batch Processing, Flow Rate Alarm, Proportional Metering, Flow Rate and Totalizing AP = Analog Output, Batch Processing, Flow Rate Alarm Proportional Metering, Flow Rate Alarm and Flow Totalizing FC = Flow Sensor - AC Coil - 200 ft. range FH = Flow Sensor - Hall Effect - 1 mile range Display Mounting S = Meter Mounted on AC Coil Sensor P = Meter Panel Mounted, AC Coil Sensor, 200 ft. range, includes 25 Ft. of cable H = Meter Panel Mounted, Hall Effect Sensor, 1 mile Range, includes 25 ft. of cable X = Sensor only (without Display Meter) Power (AO, PC, AP models must use transformer power supply) B = Battery Holder with 4 AA cells (RT model only) 1 = U.S. Transformer, AC 115V60Hz/15Vdc, NEMA 5/15 plug 2 = Europe Transformer, AC 230V50Hz/15Vdc, CEE 7/VII plug 3 = U.S. Transformer, AC 230V60Hz/15Vdc, NEMA5/15 plug X = No Selection (Customer must supply power) Pipe Sizes M/NPT (Ensure pipe size chosen is available for the fitting type) <table border="1"> <thead> <tr> <th>Imperial Pipe Sizes</th> <th>Metric Pipe Sizes</th> </tr> </thead> <tbody> <tr><td>38 = 3/8" IPS</td><td>05 = 50mm</td></tr> <tr><td>50 = 1/2" IPS</td><td>06 = 63mm</td></tr> <tr><td>75 = 3/4" IPS</td><td>07 = 75mm</td></tr> <tr><td>10 = 1" IPS</td><td>09 = 90mm</td></tr> <tr><td>15 = 1-1/2" IPS</td><td>11 = 110mm</td></tr> <tr><td>20 = 2" IPS</td><td>16 = 160mm</td></tr> <tr><td>25 = 2-1/2" IPS</td><td>20 = 200mm</td></tr> <tr><td>30 = 3" IPS</td><td>25 = 250mm (PN10 only)</td></tr> <tr><td>40 = 4" IPS</td><td>31 = 315mm (PN10 only)</td></tr> <tr><td>60 = 6" IPS</td><td></td></tr> <tr><td>80 = 8" IPS</td><td></td></tr> <tr><td>100 = 10" IPS</td><td></td></tr> <tr><td>120 = 12" IPS</td><td></td></tr> </tbody> </table>											Imperial Pipe Sizes	Metric Pipe Sizes	38 = 3/8" IPS	05 = 50mm	50 = 1/2" IPS	06 = 63mm	75 = 3/4" IPS	07 = 75mm	10 = 1" IPS	09 = 90mm	15 = 1-1/2" IPS	11 = 110mm	20 = 2" IPS	16 = 160mm	25 = 2-1/2" IPS	20 = 200mm	30 = 3" IPS	25 = 250mm (PN10 only)	40 = 4" IPS	31 = 315mm (PN10 only)	60 = 6" IPS		80 = 8" IPS		100 = 10" IPS		120 = 12" IPS		Cable Feet Blank = Standard 25 feet 50FT = 50 feet of signal cable 100FT = 100 feet of signal cable														
											Imperial Pipe Sizes	Metric Pipe Sizes																																									
											38 = 3/8" IPS	05 = 50mm																																									
											50 = 1/2" IPS	06 = 63mm																																									
75 = 3/4" IPS	07 = 75mm																																																				
10 = 1" IPS	09 = 90mm																																																				
15 = 1-1/2" IPS	11 = 110mm																																																				
20 = 2" IPS	16 = 160mm																																																				
25 = 2-1/2" IPS	20 = 200mm																																																				
30 = 3" IPS	25 = 250mm (PN10 only)																																																				
40 = 4" IPS	31 = 315mm (PN10 only)																																																				
60 = 6" IPS																																																					
80 = 8" IPS																																																					
100 = 10" IPS																																																					
120 = 12" IPS																																																					
Pipe Fitting Blank = Standard P = No pipe fitting*																																																					
O-rings Blank = Standard (FKM) E = EPDM																																																					
Calibration Range* (see pipe fitting detail) <table border="1"> <tr> <td>1 = Range 1</td> <td>2 = Range 2</td> <td>3 = Range 3</td> <td>4 = Range 4</td> </tr> </table>	1 = Range 1	2 = Range 2	3 = Range 3	4 = Range 4																																																	
1 = Range 1	2 = Range 2	3 = Range 3	4 = Range 4																																																		
Calibration Units <table border="1"> <tr><td>GM = U.S. Gallons per minute</td><td>LH = Liters per hour</td></tr> <tr><td>GH = U.S. Gallons per hour</td><td>LD = Liters per day</td></tr> <tr><td>GD = U.S. Gallons per day</td><td>MH = Cubic Meters per hour</td></tr> <tr><td>OM = U.S. Ounces per minute</td><td>IM = Imperial Gallons per minute</td></tr> <tr><td>AD = Acre Feet per day</td><td>IH = imperial Gallons per hour</td></tr> <tr><td>LM = Liters per minute</td><td></td></tr> </table> Saddle Pipe Fitting Type <table border="1"> <tr><td>SADDLE, SCH40 (I.P.S.) PVC or IRON pipe</td></tr> <tr><td>K4 = 1-1/2", 2", 3" PVDF</td></tr> <tr><td>A4 = 2-1/2", 4", 6", 8" PVC</td></tr> <tr><td>A4 = 10", 12" PVC</td></tr> <tr><td>SADDLE, SCH80 (I.P.S.) PVC pipe</td></tr> <tr><td>K8 = 1-1/2", 2", 3" PVDF</td></tr> <tr><td>A8 = 2-1/2", 4", 6", 8" PVC</td></tr> <tr><td>A8 = 10", 12" PVC</td></tr> <tr><td>SADDLE, PN10 METRIC (DIN 8062) pipe</td></tr> <tr><td>K0 = 50mm, 63mm, 90mm PVDF</td></tr> <tr><td>A0 = 75, 110, 160, 200 PVC</td></tr> <tr><td>A0 = 250,315mm PVC</td></tr> <tr><td>SADDLE, PN16 METRIC (DIN 8062) pipe</td></tr> <tr><td>K6 = 50mm, 63mm, 90mm PVDF</td></tr> <tr><td>A6 = 75, 110, 160, and 200, PVC</td></tr> </table> Inline Pipe Fitting Type <table border="1"> <tr><td>INLINE INJECTION MOLDED PP AMERICAN M/NPT</td></tr> <tr><td>M1 = Range #1, M2 = Range #2</td></tr> <tr><td>M3 = Range #3, M4 = Range #4</td></tr> <tr><td>3/8", 1/2", 3/4", 1" M/NPT polypropylene</td></tr> <tr><td>1-1/2" M/NPT polypropylene</td></tr> <tr><td>2" M/NPT polypropylene</td></tr> <tr><td>INLINE INJECTION MOLDED PP BRITISH M/BSPT</td></tr> <tr><td>MB1 = Range #1, MB2 = Range #2</td></tr> <tr><td>MB3 = Range #3, MB4 = Range #4</td></tr> <tr><td>3/8", 1/2", 3/4", 1" M/BSPT polypropylene</td></tr> <tr><td>1-1/2" M/BSPT polypropylene</td></tr> <tr><td>2" M/BSPT polypropylene</td></tr> <tr><td>INLINE INJECTION MOLDED TEE PVC SLIP/SOCKET</td></tr> <tr><td>AT = 1", 1-1/2", 2"</td></tr> <tr><td>Female slip glue/weld</td></tr> <tr><td>3" Female slip glue/weld</td></tr> </table>											GM = U.S. Gallons per minute	LH = Liters per hour	GH = U.S. Gallons per hour	LD = Liters per day	GD = U.S. Gallons per day	MH = Cubic Meters per hour	OM = U.S. Ounces per minute	IM = Imperial Gallons per minute	AD = Acre Feet per day	IH = imperial Gallons per hour	LM = Liters per minute		SADDLE, SCH40 (I.P.S.) PVC or IRON pipe	K4 = 1-1/2", 2", 3" PVDF	A4 = 2-1/2", 4", 6", 8" PVC	A4 = 10", 12" PVC	SADDLE, SCH80 (I.P.S.) PVC pipe	K8 = 1-1/2", 2", 3" PVDF	A8 = 2-1/2", 4", 6", 8" PVC	A8 = 10", 12" PVC	SADDLE, PN10 METRIC (DIN 8062) pipe	K0 = 50mm, 63mm, 90mm PVDF	A0 = 75, 110, 160, 200 PVC	A0 = 250,315mm PVC	SADDLE, PN16 METRIC (DIN 8062) pipe	K6 = 50mm, 63mm, 90mm PVDF	A6 = 75, 110, 160, and 200, PVC	INLINE INJECTION MOLDED PP AMERICAN M/NPT	M1 = Range #1, M2 = Range #2	M3 = Range #3, M4 = Range #4	3/8", 1/2", 3/4", 1" M/NPT polypropylene	1-1/2" M/NPT polypropylene	2" M/NPT polypropylene	INLINE INJECTION MOLDED PP BRITISH M/BSPT	MB1 = Range #1, MB2 = Range #2	MB3 = Range #3, MB4 = Range #4	3/8", 1/2", 3/4", 1" M/BSPT polypropylene	1-1/2" M/BSPT polypropylene	2" M/BSPT polypropylene	INLINE INJECTION MOLDED TEE PVC SLIP/SOCKET	AT = 1", 1-1/2", 2"	Female slip glue/weld	3" Female slip glue/weld
GM = U.S. Gallons per minute	LH = Liters per hour																																																				
GH = U.S. Gallons per hour	LD = Liters per day																																																				
GD = U.S. Gallons per day	MH = Cubic Meters per hour																																																				
OM = U.S. Ounces per minute	IM = Imperial Gallons per minute																																																				
AD = Acre Feet per day	IH = imperial Gallons per hour																																																				
LM = Liters per minute																																																					
SADDLE, SCH40 (I.P.S.) PVC or IRON pipe																																																					
K4 = 1-1/2", 2", 3" PVDF																																																					
A4 = 2-1/2", 4", 6", 8" PVC																																																					
A4 = 10", 12" PVC																																																					
SADDLE, SCH80 (I.P.S.) PVC pipe																																																					
K8 = 1-1/2", 2", 3" PVDF																																																					
A8 = 2-1/2", 4", 6", 8" PVC																																																					
A8 = 10", 12" PVC																																																					
SADDLE, PN10 METRIC (DIN 8062) pipe																																																					
K0 = 50mm, 63mm, 90mm PVDF																																																					
A0 = 75, 110, 160, 200 PVC																																																					
A0 = 250,315mm PVC																																																					
SADDLE, PN16 METRIC (DIN 8062) pipe																																																					
K6 = 50mm, 63mm, 90mm PVDF																																																					
A6 = 75, 110, 160, and 200, PVC																																																					
INLINE INJECTION MOLDED PP AMERICAN M/NPT																																																					
M1 = Range #1, M2 = Range #2																																																					
M3 = Range #3, M4 = Range #4																																																					
3/8", 1/2", 3/4", 1" M/NPT polypropylene																																																					
1-1/2" M/NPT polypropylene																																																					
2" M/NPT polypropylene																																																					
INLINE INJECTION MOLDED PP BRITISH M/BSPT																																																					
MB1 = Range #1, MB2 = Range #2																																																					
MB3 = Range #3, MB4 = Range #4																																																					
3/8", 1/2", 3/4", 1" M/BSPT polypropylene																																																					
1-1/2" M/BSPT polypropylene																																																					
2" M/BSPT polypropylene																																																					
INLINE INJECTION MOLDED TEE PVC SLIP/SOCKET																																																					
AT = 1", 1-1/2", 2"																																																					
Female slip glue/weld																																																					
3" Female slip glue/weld																																																					
Optional Accessories and Components 71000-294 Panel Mount Kit Bracket 71000-514 Mounting Conversion Kit, Sensor Mount to Panel Mount. 71000-301 Wall Mount Adapter Kit. Cable Not Included. 71000-302 Wall or Pipe Mounting Kit (3/8" - 1.5 " Pipe). Cable Not Included. 71000-303 Wall or Pipe Mounting Kit (2" Pipe). Cable Not Included. 71000-304 Wall or Pipe Mounting Kit (3" Pipe). Cable Not Included. 71000-305 Wall or Pipe Mounting Kit (4" Pipe). Cable Not Included. 71000-306 Wall or Pipe Mounting Kit (6" Pipe). Cable Not Included. 71000-307 Wall or Pipe Mounting Kit (8" Pipe). Cable Not Included. 71000-414 Wall or Pipe Mounting Kit (10" Pipe). Cable Not Included. 71000-415 Wall or Pipe Mounting Kit (12" Pipe). Cable Not Included. 71000-322 Battery Back-up Kit																																																					