


BLAZING SnapLOC

Filled Connectors for Outdoor/Electrical Use




INSTALLATION INSTRUCTIONS



IMPORTANT: Turn off power before installing or removing connector. Product to be used in accordance with local and national codes.



1. Strip wires to 11/16". Use one of the strip guides molded into the connector for reference. Pre-twist stranded wires.



2. Rotate handles fully apart beyond 90 degrees. Insert stripped wires into connector; #12-#14 in the large holes and #16-#20 in the small hole. Exposed ends of wires should be visible through the clear housing on the back.

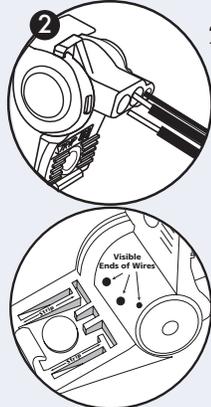

3. Hold wires in place while squeezing handles together until the latch snaps shut.

Blazing™ BVS2 SnapLoc Waterproof Connectors


SKU #	Selling Unit
BVS2	Bag of 20

PRODUCT SPECIFICATIONS & MEASUREMENTS

Max. Voltage: 600V max. building wire
 Connector Size: 2" x 1.5"
 Wire Type: Copper/Copper
 Wire Range: Large Hole Min #14/Max #12
 Small Hole Min #20/Max #16
 Temperature Rating: 105°C (221°F)
 Silicone Sealant Temperature: -40°F to 400°F

Measurements (Inches):

- A - 1.922
- B - 1.522
- C - 1.355

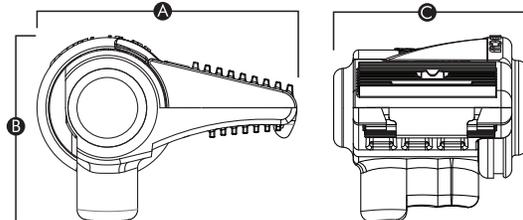

Selected 600V Wire Combinations
 For use with solid and/or stranded combinations.

Large Hole Min #14/Max #12	Small Hole Min #20/Max #16
----------------------------	----------------------------

Contact factory for a complete list of wire combinations at 800.633.0232.

KING
 INNOVATION®

U.S. Pat. 7,335,050, D575,738, D575,230, and
 other patents pending.
 50100-118 REV A 04/18

www.kinginnovation.com
 (P) 800.633.0232
 (F) 636.519.5410