



LEVEL TOP SP

SELF-LEVELING OVERLAYMENT



LEVEL TOP SP is an easy-to-use, single-component, re-surfacing compound designed for use on new or worn concrete substrates. LEVEL TOP SP is cement-based and polymer-modified and when mixed with water has a fluid consistency and self-leveling properties. As an overlayment, the high early strength makes it appropriate for many rapid turnaround flooring projects. LEVEL TOP SP can be integrally-colored, or stained in as little as 4 to 6 hours and is specifically engineered as an overlay that is walkable in just hours or can be polished in as little as 48 hours. The surface may be sealed with a solvent or water based sealer, epoxies or urethane.

CUSTOMER SUPPORT

- Technical Support – Available for product selection, application questions.
- Product Assistance – Locate a contractor or distributor. Support literature and in-depth written application instructions.
- Field Specialists – Increte-trained field specialists provide consultations and recommendations.
- Design Consultation – Complete with showroom and training facility.
- Seminars – 2-day seminars include classroom instruction on project estimating, marketing and sales tactics to grow your business all year long with hands-on product training (available in Spanish). On-site distributor training and webinars by request are also available.

APPLICATIONS

Leveling interior concrete substrates
Decorative/polished wearing surfaces
Retail/commercial flooring
Underlayments
Compatible with liquid densifiers


PRODUCT SUPPORT

Specification assistance
CAD details
Design consultation
Color selection assistance
Laboratory support
Applied samples
Engineered-systems approach

LEVEL TOP SP

STAIN CRETE

Available in 9 standard colors.

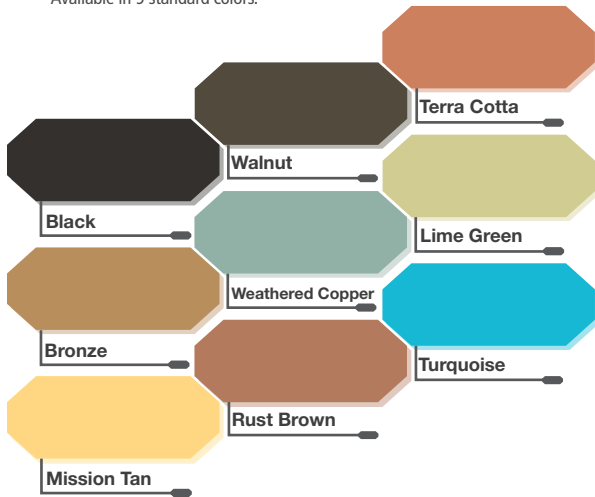

VIBRA STAIN

A spectrum of color options.



NOTE: The printed color chart is for reference purposes only. Euclid Chemical recommends choosing colors from actual test samples.

LEVEL TOP SP surfaces may be sealed with any of the Increte solvent or water based sealers, epoxies or urethanes. It restores and renews interior surfaces.

FEATURES

- Unique, decorative concrete resurfacing system
- Self-leveling
- Variety of decorative appearances
- Interior applications only
- Easy to use
- Excellent adhesion to old or new concrete
- Low water demand
- Polishable in 48 hours*
- Long term durability
- Can be integrally colored
- Walkable/stainable in as little as 4-6 hours*

* Readiness may vary due to conditions. Surface should be evaluated first.



EUCLID CHEMICAL

1611 Gunn Highway
Odessa, FL 33556
t 1-800-752-4626
f 1-813-920-1516

www.increte.com

SS10 LEVEL TOP SP © 2016 The Euclid Chemical Company. This material is provided for informational purposes only. The Euclid Chemical Company expressly disclaims any liability relating to the use of this material. Nothing stated herein shall give rise to or constitute any warranty by The Euclid Chemical Company, express or implied, including but not limited to any implied warranty of merchantability or fitness for a particular purpose. The information provided in this material is not intended to be all inclusive, as the manner in which any product is used or handled may involve other or additional considerations that are not addressed herein.