

# BRYCE Hanging Down Light for AR11, MR16, or G4 Blaze



## DESCRIPTION


The Bryce Hanging Down Light works with AR11, MR16 and MR16 Chameleon lamps, or G4 Blaze lamps with the Frosted Acrylic version.

### BRYCE HANGING DOWN LIGHT

Use	<b>Downlighting Techniques in Trees or Architecture by Hanging on a Chain or Cable</b>	
Finish	<b>Brass, Copper, Brass w/ Black Cerakote®, or Frosted</b>	
Includes	<b>LightingShrink Professional Crimp and Heat Shrink Cable Connector</b>	
Warranty	<b>Lifetime Warranty on National Parks Series Fixtures</b>	
Order With Lamp	<b>AR11, 2W, 2700K, 60°</b>	BRYCE-HDL-AR11-CU BRYCE-HDL-AR11-BR BRYCE-HDL-AR11-BR-BLK
	<b>MR16, 4W, 2700K, 60°</b>	BRYCE-HDL-MR16-CU BRYCE-HDL-MR16-BR BRYCE-HDL-MR16-BR-BLK
	<b>G4 Blaze</b>	BRYCE-HDL-G4-FRST
Order Without Lamp	<b>Fits AR11</b>	BRYCE-HDL-AR11-CU-NL BRYCE-HDL-AR11-BR-NL BRYCE-HDL-AR11-BR-BLK-NL
	<b>Fits Chameleon MR16, MR16</b>	BRYCE-HDL-MR16-CU-NL BRYCE-HDL-MR16-BR-NL BRYCE-HDL-MR16-BR-BLK-NL
	<b>Fits G4 Blaze</b>	BRYCE-HDL-G4-FRST-NL



Brass (BR)      Copper (CU)      Brass + Black Cerakote® (BR-BLK)      Frosted Acrylic (FRST)

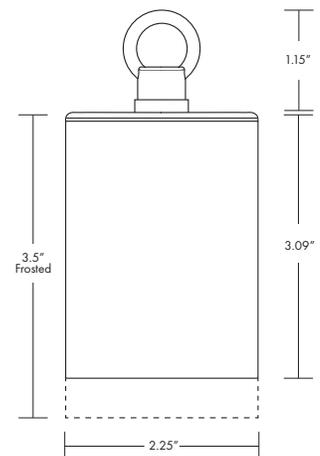



**BRYCE-HDL-AR11-CU**

#### **INSTALLING THE LAMP**

1. Unscrew the fixture body from the lid.
2. Install the lamp in the socket.
3. Reinstall the fixture body.

#### **HANGING THE FIXTURE**

**IMPORTANT: DO NOT INSTALL ON OR NEAR ANY HIGH VOLTAGE POWER LINES**

1. Hang the fixture from a secure stainless steel eye bolt, with or without a chain.
2. Create a drip loop with the wire by bending the wire to a slope one inch below the fixture cap.