

OZARK Soft Accent Light



DESCRIPTION

The Brilliance Soft Accent Light comes complete with a glare shield, Brilliance Metal Works signature adjusting system with 22 points of articulation in 10 degree increments, ABS mounting stake, and LightingShrink professional crimp and heat shrink cable connector.

Part Number: **OZARK SAL-SLB-AL-BLK**

BR-BLK
BR

LAMP: 1W, 60 Lumens, 2700K

FINISH: Blackened machined aluminum, brass, blackened machined brass

USE: Up lighting, grazing, and backlighting techniques.
Best used when low level wall wash techniques are required




Blackened Aluminium



Brass (BR) Special Order



Blackened Brass (BR-BLK) Special Order

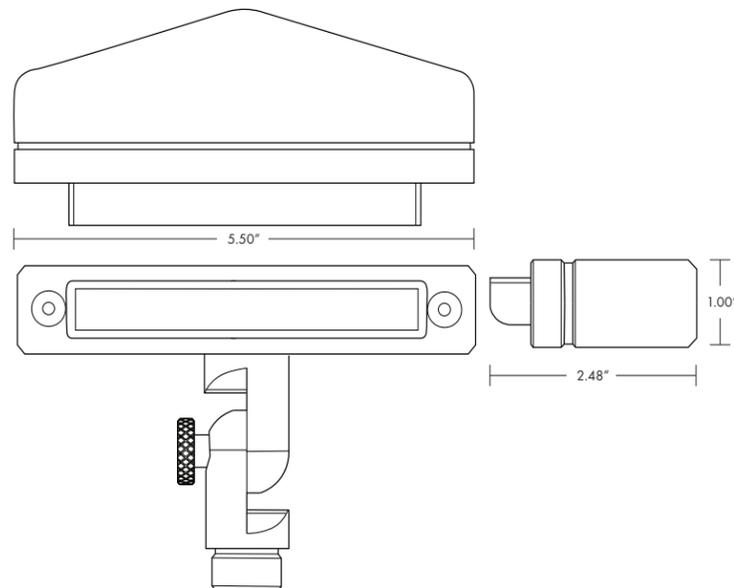

OZARK SAL-DB-SLB-AL-BLK

INSTALLING THE FIXTURE

1. Dig a hole in the ground approximately 4" wide by 10" deep. A rubber mallet may be used to drive the stake into the ground when working with soft soil.
2. Lay the power cable from the fixture into the slotted relief on the stake.
3. Screw the fixture into the stake.
4. Use a level to assure the top of the spike is level with the ground.

ADJUSTING THE FIXTURE

1. Turn the knuckle counter-clockwise to loosen the knuckle.
2. Rotate the fixture vertically to the desired position.
3. Turn the knuckle clockwise to hold it in the desired position.