

Wide Flange Corner Bead

Designed for deep fills, irregular corners and conditions requiring two layers of 5/8" drywall

Produced with exterior grade-PVC and have a uniform thickness with feathering at the flange ends. Provides hard-to-damage, rust-proof, and straight corners. Large triangular perforations allow material to easily flow through and bond to the substrate for a more durable corner. Standard length is 10ft. on all corner beads.

Product Data & Ordering Information:


Product code	Ground	Flange	Pcs./Ctn.
#40	All	4-1/4" x 4-1/4"	25
#30	All	3" x 3"	25
#43	All	4-1/4" x 3"	25
#4150	All	4-1/4" x 1-1/2"	25
#3150	All	3" x 1-1/2"	25

Code Approvals & Performance Standards

- [ASTM C841](#) Standard Specification for Installation of Interior Lathing and Furring
- [ASTM C1063](#) Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster
- [ASTM C1780](#) Standard Practice for Installation Methods for Cement-based Adhered Masonry Veneer
- [ASTM C1861](#) Standard Specification for Lathing and Furring Accessories, and Fasteners, for Interior and Exterior Portland Cement-Based Plaster
- [ASTM D1784](#) Standard Classification System and Basis for Specification for Rigid Poly(Vinyl Chloride) (PVC) Compounds and Chlorinated Poly(Vinyl Chloride) (CPVC) Compounds
- [ASTM D4216](#) Standard Specification for Rigid Poly(Vinyl Chloride) (PVC) and Related PVC and Chlorinated Poly(Vinyl Chloride) (CPVC) Building Products Compounds
- [SDS Vinyl Corp](#) PVC Compounds

Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

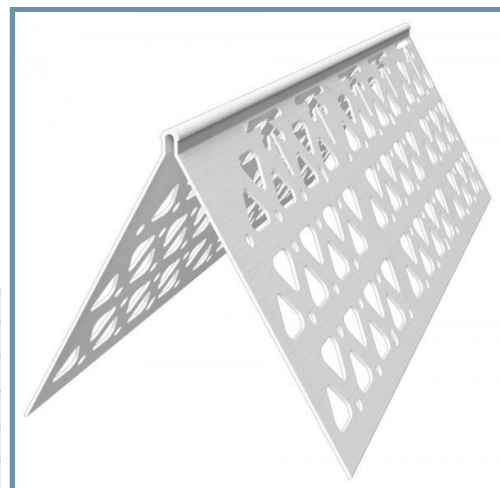

Made in white or these standard thru-body colors:



Contact ClarkDietrich for pricing and availability

