


# CHEMLINK

## The NovaLink family of high-performance sealants for concrete and masonry

### *Polyether technology—ideal for damp concrete*



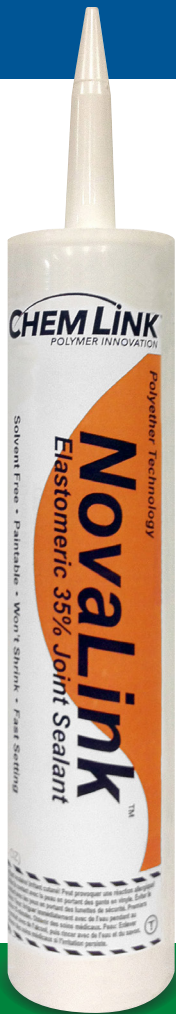

## Product Information:

**NovaLink 35** is a high performance, moisture cure, interior/exterior joint sealant for use in both moving and non moving joint applications. Polyether technology provides a long lasting weather tight seal to a variety of construction substrates. It is ideal for a wide range of applications where joint movement requires compression and extension in excess of 35%.

**NovaLink SL** is a self-leveling, moisture curing sealant, designed for application on horizontal joints in concrete construction. Applications include sealing horizontal joints such as driveways, factory floors, balconies, parking structures and many roofing applications. It is ideal for a wide range of applications where joint movement requires compression and extension in excess of 25%.

**M-1**<sup>®</sup> is a versatile, moisture curing, high performance polyether adhesive/sealant designed for difficult construction site conditions such as wet or dry climates. It's higher shore A and physical properties provides a long lasting durable seal in many applications. **M-1**<sup>®</sup> is capable of joint movement in excess of 35% in both compression and extension.

	NovaLink 35	NovaLink SL	M-1
White	√	√	√
Almond	√		
Limestone	√		√
Gray	√	√	√
Aluminum	√		
Charcoal Gray	√	√	
Terra Cotta	√		
Tan	√		√
Stone	√	√	
Medium Bronze	√		
Black	√	√	√
Dark Bronze	√		
Natural Clay	√		
Redwood Tan	√		
Buff	√		
Anodized Aluminum	√		
Aluminum Stone	√		
Beige	√		
Ivory	√		

*\*Custom colors are available upon special request*