


CL-398

LED Integrated Rail Light

Please read carefully before installation

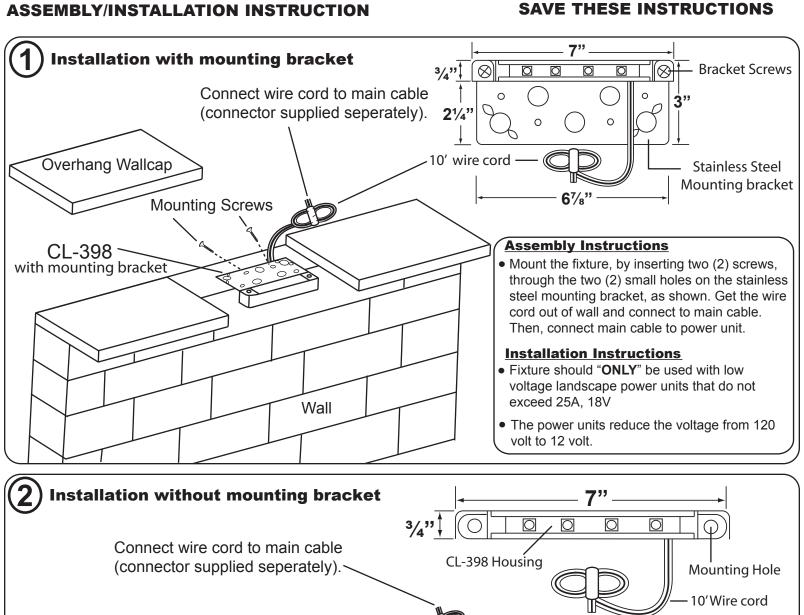

Connect wire cord to main cable (connector supplied seperately). 10' wire cord Wall Cap CL-398 Housing R CL-398 housing Wire cord Mounting Screws Mounting Screws

Assembly Instructions

- Drill a hole on wall and get the wire cord through the hole and out the wall.
- Remove the stainless steel bracket and "U" shaped cover from the fixture and mount the housing with two (2) screws on ceiling of wall cap. Connect the wire cord to the main cable. Then, connect main cable to power unit.

Installation Instructions

- Fixture should "ONLY" be used with low voltage landscape power units that do not exceed 25A, 18V
- The power units reduce the voltage from 120 volt to 12 volt.