

WWW.CORONALIGHTING.COM

ARCHITECTURAL GRADE SERIES

SPECIFICATION SHEET

1633 Staunton Ave Los Angeles, CA 90021

FAX. (800) 727-9957 (800) 727-9262

(213) 747-3234 (213) 747-4500

E-Mail: sales@coronalighting.com

PRODUCT #: CL-398-BZ •Rail Lights • Aluminum

Fixture Specifications:

Light Bar Cast aluminum. Removable bar for variety of

Housing: uses.

BZ- Bronze. Finish:

Lighting

Integrated LED, five single cores, 2.5Watt, 140 Lumens, 3000 kelvin, 120° beam spread, 8-18 volt Source: AC operating voltage, 20W Halogen equivalent,

-4°F to +140°F ambient temperature.

Wiring: Fixture is prewired with a 10-ft 18-2 direct burial

cord, pre-stripped for easy connection, wire connector available seperately. Universal connector (CX-839) silicone filled wire nut (CX-854) can be ordered from

Corona Lighting.

Mouting Bracket: Stainless steel, glare shield, supplied with screws and

anchor bolts. Breakoff corners for easy installation.

Electrical Notes: A remote 12V magnetic transformer is required, can be


> be ordered from Corona Lighting, seperately. Not for use with electronic transformer. Increasing voltage above 12 volts AC may decrease life of LED cores.

Applications: Retaining walls, Patios, Gazebos, Decks, Benches,

Stairs, and Outdoors Living Spaces.

Dimensions: 7" X 3/4"

Warranty: 10 year warranty, with a rated life of 50,000 hours.

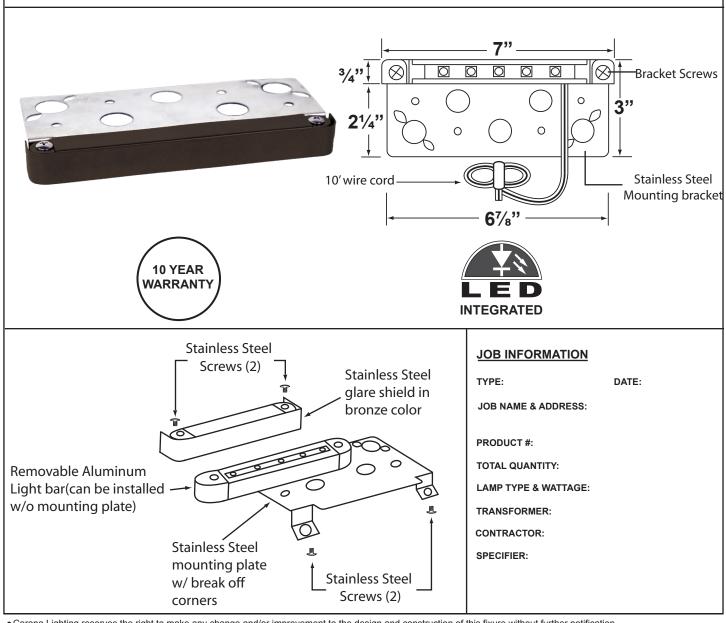

Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixure without further notification.