



WWW.CORONALIGHTING.COM

ARCHITECTURAL GRADE SERIES

1633 Staunton Ave  
Los Angeles, CA 90021

TEL. FAX.

(800) 727-9262 (800) 727-9957

(213) 747-4500 (213) 747-3234

# SPECIFICATION SHEET

E-Mail: sales@coronalighting.com

## PRODUCT # : CL-399-BZ

•Rail Lights

•Aluminum

### Fixture Specifications:

**Light Bar Housing:** Cast aluminum. Removable bar for variety of uses

**Finish:** BZ- Bronze

**Lighting Source:** Integrated LED, ten single cores, 4 Watt, 200 Lumens, 3000 Kelvin, 120° beam spread, 8-18 volt AC operating voltage, 25W Halogen equivalent, -4°F to +140°F ambient temperature.

**Wiring:** Fixture is prewired with a 10-ft 18-2 direct burial cord, pre-stripped for easy connection, wire connector available separately. Universal connector CX-839 or gel filled wire nut CX-854 can be ordered from Corona Lighting.

**Mounting Bracket:** Stainless steel, glare shield, supplied with screws and anchor bolts. Break off corners for easy installation.



**Electrical Notes:** A remote 12V magnetic transformer is required, can be ordered from Corona Lighting, separately. Not for use with electronic transformer. Increasing voltage above 12 volts may decrease the life of LED cores.

**Applications:** Retaining walls, Patios, Gazebos, Decks, Benches, Stairs, and Outdoors Living Spaces.

**Dimensions:** 13" X 3/4"

**Warranty:** 10 year warranty, with a rated life of 50,000 hours.

10 YEAR  
WARRANTY

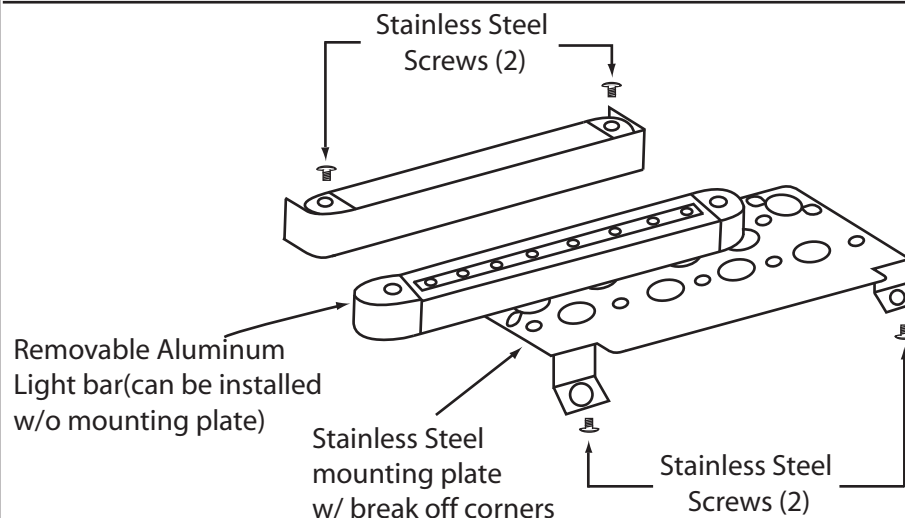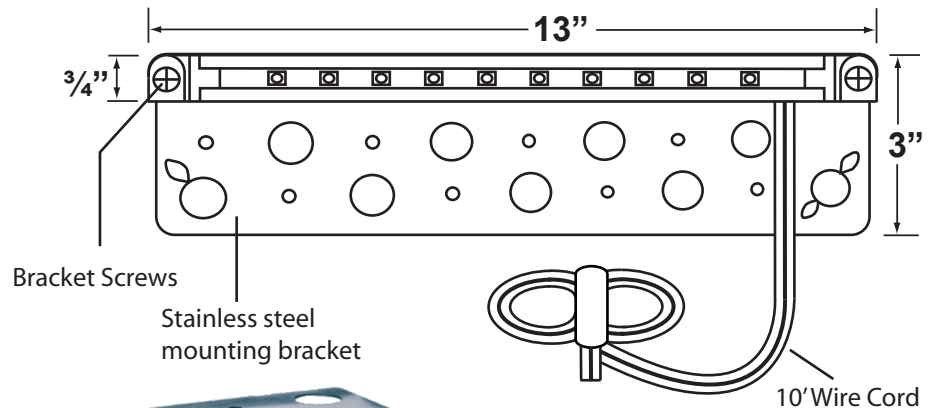

### JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER: