

PRODUCT # : CL-525B-AB

Fixture Specifications:

Housing & Shroud: Corrosion Resistant Cast Brass.

Finish: **AB- Antique Bronze.** Natural toning process. AB finish will vary due to artistic process. **BR, GM and SI** finishes also available.

Lens: Clear and heat resistant convex glass.

Socket: Top grade loose ceramic bi-pin socket, with spring loaded design.

Lamp: 12V, MR-16 halogen, 50W max. L-BAB-C20 (20w) standard. LED lamps available in 3.5W, 5W and 7W-2700K color temperature. Available in 15°, 45°, 60° beam spreads for Cree and 45° for Epistar brands.

Wiring: Fixture is prewired with a 3-ft 18-2 SPT2-W direct burial cord. Optionally, this fixture can be ordered with a 25-ft cord (**CL-525B-AB-25**). Universal connector CX-839 or silicone filled wire nut CX-854 may be ordered to Corona Lighting.

•Directional Lights

•Cast Brass

Gasket: Silicone double gasketed for water tight sealing

Knuckle: Adjustable cast brass knuckle with thumb screw and 1/2" NPT threaded male hub on bottom.


Mounting Spike: Standard injection molded spike with 1/2" NPT threaded female hub.

Electrical Notes: A remote 12V transformer required, may be ordered to Corona Lighting separately. Voltage range for 12V halogen lamps are 11V-12.5V. Voltage range for LED lamps are 9V-17V. Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Limited lifetime warranty on fixture housing against manufacturer's defects.



3.5W and 5W

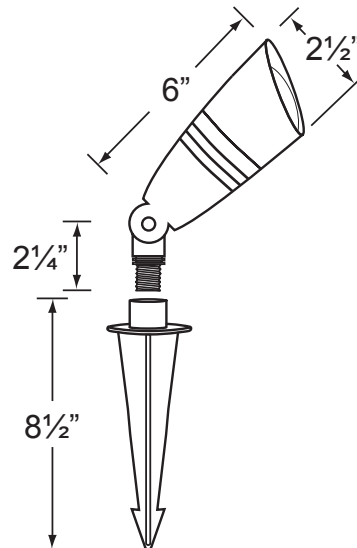

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

| LAMP NUMBER | WATTS | BEAM | | COLOR & TEMP. | RATED HOURS | HALOGEN EQUIVALENT |
|-------------------|-------|----------------|-------|---------------|-------------|--------------------|
| | | SPREAD | LUMEN | | | |
| L-ED16-COB5W-SP | 5 | 15° Spot | 450 | 2700K | 50,000 | 50 Watt |
| L-ED16-COB5W-FL | 5 | 38° Flood | 450 | 2700K | 50,000 | 50 Watt |
| L-ED16-COB5W-WF | 5 | 60° Wide Flood | 450 | 2700K | 50,000 | 50 Watt |
| L-ED16-COB5W-SP3K | 5 | 15° Spot | 470 | 3000K | 50,000 | 50 Watt |
| L-ED16-COB5W-FL3K | 5 | 38° Flood | 470 | 3000K | 50,000 | 50 Watt |
| L-ED16-COB5W-WF3K | 5 | 60° Wide Flood | 470 | 3000K | 50,000 | 50 Watt |
| L-ED16-3W-SP | 3.5 | 15° Spot | 270 | 2700K | 50,000 | 25 Watt |
| L-ED16-3W-FL | 3.5 | 45° Flood | 270 | 2700K | 50,000 | 25 Watt |
| L-ED16-3W-WF | 3.5 | 60° Wide Flood | 270 | 2700K | 50,000 | 25 Watt |
| L-ED16-5W-SP | 5 | 15° Spot | 350 | 2700K | 50,000 | 40 Watt |
| L-ED16-5W-FL | 5 | 45° Flood | 350 | 2700K | 50,000 | 40 Watt |
| L-ED16-5W-WF | 5 | 60° Wide Flood | 350 | 2700K | 50,000 | 40 Watt |

For more additional Lamps, and accessories visit Coronalighting.com

JOB INFORMATION

TYPE:

DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering LED lamp with a fixture your part number should follow the format below:

• **CL** - **product #** - **lamp** - **wattage** - **lamp angle**

CL - 525B-AB - L-ED16 - 5W - FL

Example: CL-525B-AB-L-ED16-5W-FL

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.