

TEL.

FAX.

1 E L .

(800) 727-9957

(800) 727-9262 (213) 747-4500

(213) 747-3234



Faceplate:

ARCHITECTURAL GRADE SERIES

## **SPECIFICATION SHEET**

E-Mail: sales@coronalighting.com

PRODUCT #: CL-344B-GM

Step Light

Cast Brass

**Fixture Specifications:** 

Housing: Heavy Duty Corrosion Resistant Cast Brass.

Diecast brass faceplate with frosted lens, fitted to

stainless steel backplate.

Finish: GM- Gun Metal. Natural toning process.

GM finish will vary due to artistic process. Also available in: **AB**- Antique Bronze & **SI**- Silver

**Lighting** Removable 2.5W LED module, 250 lumens, 3000K,

Source: 20W halogen equivalent. Rated hours: 30,000

**Wiring:** Fixture is prewired with a 25 ft SPT2-W direct burial

cord, pre-stripped for easy connection. Wire connector sold seperately. Universal connector (CX-839), silicone filled wire nut (CX-854) or quick locking wire connector (CX-LOC) are available from

Corona Lighting.

**Mounting:** Surface mounted on walls or steps. Best used on concrete, brick, or other masonry surfaces. Two

screws and two anchor bolts are provided.

Electrical Notes: Removable LED module is dimmable. A remote 12V

magnetic transformer is required. Options are available from Corona Lighting. Not for use with electronic transformers. Voltage range for LED

module is: 8 -15Volt AC

Ambient temperature: -40°F to 124°F. CRI: Ra > 80 Proper grease/lubricant is suggested on threaded parts during installation process. Increasing voltage above 12 volts AC may decreased life of LED cores.


**Dimensions:** 5½" (Width) x 2½" (Height) x ½" (Depth)

Warranty: Limited lifetime warranty on fixture housing and


faceplate against manufacturer's defects.
Ten (10) year warranty on removable LED module.







# Template of backplate NO BACKBOX REQUIRED

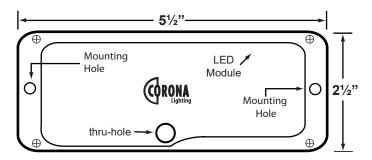

NOTE: This is the back of the Fixture. Looking from the front of the fixture the positions of through-hole and other details are reversed.

#### JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:



ARCHITECTURAL GRADE SERIES

### **ACCESSORIES SHEET**

1633 Staunton Ave Los Angeles, CA 90021

TEL. FAX. (800) 727-9262 (800) 727-9957 (213) 747-4500 (213) 747-3234

E-Mail: sales@coronalighting.com

PRODUCT #: CL-344B-GM

Step Lights

Cast Brass

#### **Cable Connectors**

CX-854 Direct Burial Silicone Filled Wire Nut, Tan

CX-858 Speedy Cable Connector, Supply Cable up to 10-2, Black

CX-839 Universal cable connector, Supply cable up to 8-2,

one/Pack Black

CX-LOC Quick-Locking Silicone Filled Wire Connector, 25 Sets (50

per Pack)

