

# SPECIFICATION SHEET



## PRODUCT # : CL-110B-GM

• Down Lights

• Cast Brass

### Fixture Specifications:

<p><b>Housing:</b> Corrosion resistant cast brass.</p> <p><b>Finish:</b> <b>GM- Gun Metal.</b> Natural toning process. GM finish will vary due to artistic process. Also available in <b>AB- Antique Bronze</b> finish.</p> <p><b>Lens:</b> Clear and heat resistant tempered flat glass</p> <p><b>Socket:</b> Top grade fixed ceramic bi-pin socket, with lamp retention clip to securely hold lamp in place.</p> <p><b>Lamp:</b> Two 12V, MR-16, 50W max. Available in 2xLED (3.5W or 5W) or without lamps. See the Lamp Guide below for more information.</p> <p><b>Wiring:</b> Fixture is prewired with a 25-ft 18-2 SPT2-W direct burial cord. Wire connector sold separately. Silicone filled direct burial wire nut (<b>CX-854</b>) and quick-locking connectors (<b>CX-LOC</b>) are available from Corona Lighting.</p>	<p><b>Gasket:</b> Silicone gaskets for water-tight sealing</p> <p><b>Mounting:</b> Stainless Steel mounting screws with anchor bolts</p> <p><b>Applications:</b> Outdoor Living Spaces, Porches, Garages, Pool Cages and Pergolas</p> <p><b>Electrical Notes:</b> A remote 12V transformer is required. Options are available from Corona Lighting. Voltage range for LED lamps are 9V-17V. Proper grease/lubricant is suggested on threaded parts during installation process.</p> <p><b>Warranty:</b> Limited lifetime warranty on fixture housing against manufacturer's defects.</p>
---	--

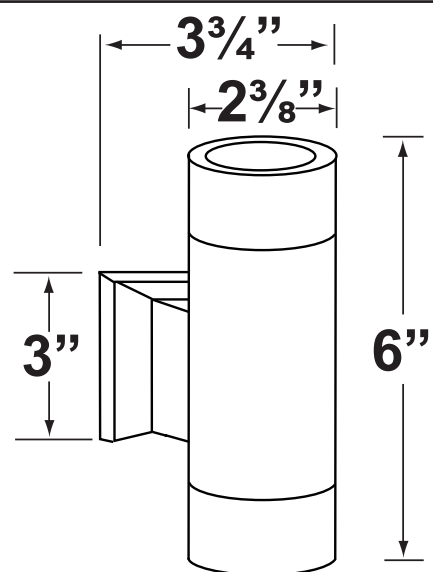

### AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-ED16-3W-SP	3.5	15° Spot	270	2700K	50,000	25 Watt
L-ED16-3W-FL	3.5	45° Flood	270	2700K	50,000	25 Watt
L-ED16-3W-WF	3.5	60° Wide Flood	270	2700K	50,000	25 Watt
L-ED16-5W-SP	5	15° Spot	350	2700K	50,000	40 Watt
L-ED16-5W-FL	5	45° Flood	350	2700K	50,000	40 Watt
L-ED16-5W-WF	5	60° Wide Flood	350	2700K	50,000	40 Watt
L-ED16-COB5W-SP	5	15° Spot	450/470	2700K/3000K	50,000	50 Watt
L-ED16-COB5W-FL	5	38° Flood	450/470	2700K/3000K	50,000	50 Watt
L-ED16-COB5W-WF	5	60° Wide Flood	450/470	2700K/3000K	50,000	50 Watt
L-ED16-6W-SP	6	15° Spot	600	2700K/3000K	50,000	75 Watt
L-ED16-6W-FL	6	38° Flood	600	2700K/3000K	50,000	75 Watt
L-ED16-6W-WF	6	60° Wide Flood	600	2700K/3000K	50,000	75 Watt

■ Single color MR-16 LED available in AMBER, BLUE, GREEN, PURPLE, RED and VIOLET

### JOB INFORMATION

TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_

JOB NAME & ADDRESS: \_\_\_\_\_

PRODUCT #: \_\_\_\_\_

TOTAL QUANTITY: \_\_\_\_\_

LAMP TYPE & WATTAGE: \_\_\_\_\_

TRANSFORMER: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

SPECIFIER: \_\_\_\_\_

• When ordering LED lamp with a fixture your part number should follow the format below:

• CL - **product #** - **lamp** - **wattage** - **lamp angle**  
 CL - 102B-GM - L-ED16 - 3W - SP

Example: CL-102B-GM-L-ED16-3W-SP

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.


## PRODUCT # : CL-110B-GM

Down Lights

• Cast Brass

### Cable Connectors

- CX-854 Direct Burial Silicone Filled Wire Nut, **Tan**
- CX-LOC Quick-locking gel filled wire connector  
Two / Pack, **Tan**

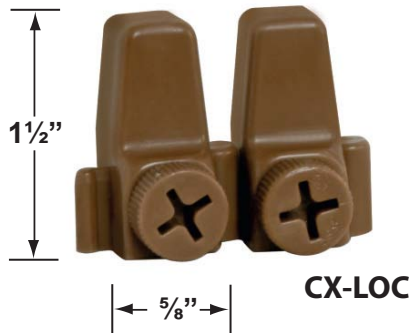

**CX-LOC**



**CX-854**

### Special Lenses & Honeycomb Louvers

- CX-238 MR-16 Snap-on holder, **Silver Plated**
- CX-239 MR-16 honeycomb louver, **Black**
- CX-240-AM MR-16 color lens, **Amber**
- CX-240-BL MR-16 color lens, **Blue**
- CX-240-GR MR-16 color lens, **Green**
- CX-240-RD MR-16 color lens, **Red**
- CX-240-YL MR-16 color lens, **Yellow**
- CX-241 MR-16 lens, **Linear Spread**
- CX-242 MR-16 lens, **Frosted**
- CX-243 MR-16 lens, **Prismatic**

*For MR-16 Lenses and Louvers, you will need the CX-238*

