

SPECIFICATION SHEET


PRODUCT # : CL-550B-BK

• Directional Lights


• Cast Brass

Fixture Specifications:

Housing:	Corrosion resistant cast brass	Gasket:	Silicone double gasketed for water tight sealing
Finish:	BK- Black Brass Also available in AB- Antique Bronze	Knuckle:	Adjustable cast brass knuckle with thumb screw and 1/2" NPT threaded male hub on bottom.
Lens:	Clear and heat resistant convex glass.	Mounting Spike:	Standard injection molded spike with 1/2" NPT threaded female hub.
Socket:	Top grade fixed ceramic bi-pin socket, with lamp retention clip to securely hold lamp in place.	Electrical Notes:	A remote 12V transformer is required. Options are available from Corona Lighting (see page 3). Voltage range for BT/LED lamps are 9V-17V. Proper grease/lubricant is suggested on threaded parts during installation process.
Lamp:	12V, MR-16 LED Available in 5W Bluetooth mesh smart RGB-WW; 3.5W, 5W, 6W LED or without lamp. See lamp guide, below for more information.	Warranty:	Ten (10) year warranty on fixture housing against manufacturer's defects.
Wiring:	Fixture is prewired with a 3-ft 18-2 SPT2-W direct burial cord. Wire connector sold separately. Quick-locking connectors (CX-LOC) are available from Corona Lighting.		



3.5W, 5W and 6W

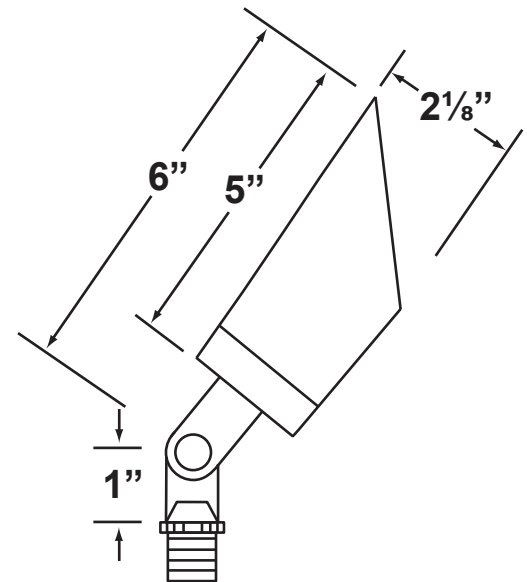

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM SPREAD	LUMEN	COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
L-ED16-5W-BT 	1-5	15° / 38° / 60°	25-530	2200K-5700K	50,000	---
L-ED16-3W / 5W-SP 	3.5 / 5	15° Spot	270 / 350	2700K	50,000	25 / 40 Watt
L-ED16-3W / 5W-FL 	3.5 / 5	45° Flood	270 / 350	2700K	50,000	25 / 40 Watt
L-ED16-3W / 5W-WF 	3.5 / 5	60° Wide Flood	270 / 350	2700K	50,000	25 / 40 Watt
L-ED16-COB5W-SP / 3K	5	15° Spot	450 / 470	2700K / 3000K	50,000	50 Watt
L-ED16-COB5W-FL / 3K	5	38° Flood	450 / 470	2700K / 3000K	50,000	50 Watt
L-ED16-COB5W-WF / 3K	5	60° Wide Flood	450 / 470	2700K / 3000K	50,000	50 Watt
L-ED16-6W-SP / 3K	6	15° Spot	600	2700K / 3000K	50,000	75 Watt
L-ED16-6W-FL / 3K	6	38° Flood	600	2700K / 3000K	50,000	75 Watt
L-ED16-6W-WF / 3K	6	60° Wide Flood	600	2700K / 3000K	50,000	75 Watt

■ 5W Single color MR-16 LED available in AMBER, BLUE, GREEN, PURPLE, RED and VIOLET

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering LED lamp with a fixture your part number should follow the format below:

• CL - product # - lamp - wattage - lamp angle

CL - 550B-BK - L-ED16 - 5W - FL

Example: CL-550B-BK-L-ED16-5W-FL

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

ACCESSORIES SHEET


PRODUCT # : CL-550B-BK

• Directional Lights

• Cast Brass

Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal, ½" NPT Female Brass Hub on top, **Black**



CX-603-BK

CX-621-BK 1" PVC Cap, ½" NPT, **Black**

CX-622-BK 2" PVC Cap, ½" NPT, **Black**

CX-624-BK 3" PVC Cap, ½" NPT Female Brass Hub, **Black**

Mounting Canopies

CX-705B-BK Brass Flat Canopy, ½ NPT, **Black Brass**

CX-709B-BK Brass Raised Canopy, ½ NPT, **Black Brass**

CX-718-BK 5" Aluminum Canopy, 3-Hole ½ NPT, **Black**

CX-719B-BK Brass Tree Mounting Bracket, ½" NPT, **Black Brass**

CX-721B-BK Brass Tree Mount Canopy with 15" Rubber Strap stretches to 22", **Black Brass**

CX-722B-BK Brass Tree Mount Canopy with 22" Rubber Strap stretches to 33", **Black Brass**

CX-723B-BK Brass Tree Mount Canopy with 31" Rubber Strap stretches to 45", **Black Brass**



CX-705B-BK



CX-718-BK



CX-719B-BK




CX-722B-BK



CX-709B-BK

Ground Spike Supplied

CX-645-BK 8.5" ABS Spike, ½" NPT, **Black**

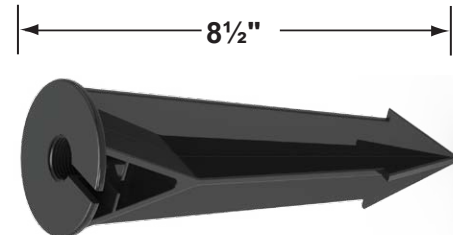

CX-645-BK


Optional Ground Spikes

CX-646-BR 8"h x ½"w Brass Spike, ½" NPT, **Natural Brass**

CX-650-BZ 8½"h x 3"w Slotted ABS Spike with Brass Threads, ½" NPT, **Bronze**



CX-646-BR

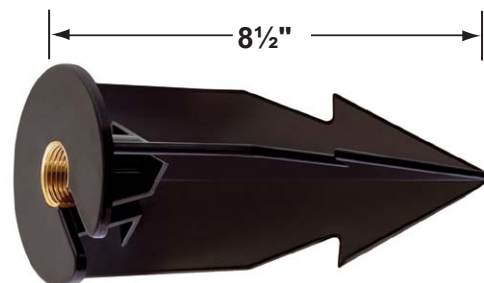

CX-650-BZ

Mounting Risers

CX-782B-BK 6" Brass Riser, ½ NPT Male/Female, **Black Black**

CX-783B-BK 12" Brass Riser, ½ NPT Male/Female, **Black Brass**

CX-784B-BK 18" Brass Riser, ½ NPT Male/Female, **Black Brass**

CX-785B-BK 24" Brass Riser, ½ NPT Male/Female, **Black Brass**



CX-782B-BK 6"



CX-783B-BK 12"



CX-784B-BK 18"



CX-785B-BK 24"

ACCESSORIES SHEET


PRODUCT # : CL-550B-BK

• Directional Lights

• Cast Brass

Stainless Steel Pool and Spa Rated Transformers

T-LTF60	60W, 12V, Compact Mini Transformer
T-LT75	75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
T-LT150	150W, 12-15V, Single Circuit Transformer.
T-LT300	300W, 12-15V, Single Circuit Transformer.
T-LT600	600W, 12-15V, Dual Circuit Transformer.
T-LT900	900W, 12-22V, Triple Circuit Transformer.
T-FIDT	Field Installed Plug-in Digital Timer.
T-FIT	Field Installed Plug-in Mechanical Timer.
T-TR-FIP	Field Installed Plug-in Photocell

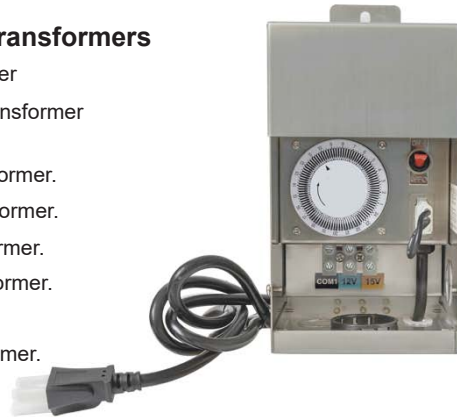

T-LT75



T-LT150



T-LT300



T-FIDT

Special Lenses & Honeycomb Louvers

CX-238*	MR-16 Snap-on holder, Silver Plated
CX-239	MR-16 honeycomb louver, Black
CX-240-AM	MR-16 color lens, Amber
CX-240-BL	MR-16 color lens, Blue
CX-240-GR	MR-16 color lens, Green
CX-240-RD	MR-16 color lens, Red
CX-240-YL	MR-16 color lens, Yellow
CX-241	MR-16 lens, Linear Spread
CX-242	MR-16 lens, Frosted
CX-243	MR-16 lens, Prismatic

*For MR-16 Lenses and Louvers, you will need the CX-238



CX-DIM-100

Dimmer

CX-DIM-100 100W, Low Voltage Dimmer Switch.
Use with T-LT Series Transformers, **Black**

Cable Connectors

CX-LOC Quick-locking Cable Connectors, **Tan**
([Installation Instructions](#))

CX-LOC

