



COLLATED 21° PLASTIC STRIP NAILS

GENERAL CONSTRUCTION

- Bright Coated
- Electrogalvanized: All are in accordance with ASTM A 641, Class 1

Please Note - Electro Galvanized nails are not for use in cedar, cement board, redwood, most treated wood or exposed applications.

OUTDOOR CONSTRUCTION

Outdoor Construction

All are in accordance with ASTM A153 Class D Standards and are suitable for most treated lumber

- Hot Dipped Galvanized
- Hot Galvanized
- Exterior Galvanized : Are in accordance with ESR-2914 and ASTM A153


PRIMEGUARD MAX

- Stainless Steel - AISI 304
- Stainless Steel - AISI 316 for marine applications

Grip-Rite Collated meet or exceed the ASTM F1667 Standard (if applicable).



TECHNICAL INFORMATION

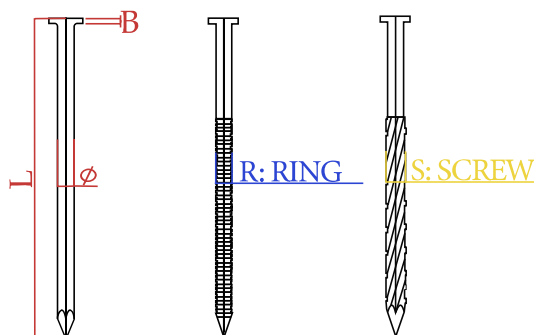

NAIL WIRE DIAMETER	HEAD DIAMETER(D)	HEAD THICKNESS(B)	FINISH
0.113"	0.268"~0.285"	0.039"~0.049"	BRIGHT
0.120"	0.268"~0.285"	0.039"~0.049"	ELECTRO GALV.
0.131"	0.268"~0.285"	0.043"~0.059"	EXTERIOR GALV.
0.135"	0.268"~0.285"	0.043"~0.059"	HOT GALV.
0.148"	0.285"~0.302"	0.049"~0.063"	304 STAINLESS STEEL
0.162"	0.309"~0.341"	0.059"~0.071"	316 STAINLESS STEEL

NAILS/STRIP	RING(R)	SCREW(S)
28	Ø(+0.004"~+0.008")	Ø(+0.006"~+0.010")
24		

BEND YIELD,PSI	SMOOTH(Ø)	NAIL LENGTH	LENGTH TOLERANCE(L)
>100,000	0.113"(+0/-0.004")	1-1/2"	1.5"(+/-1/16")
>100,000	0.120"(+0/-0.004")	2"	2"(+/-1/16")
>100,000	0.131"(+0/-0.004")	2-1/8"	2.25"(+/-1/16")
>100,000	0.135"(+0/-0.004")	2-1/4"	2.25"(+/-1/16")
>90,000	0.148"(+0/-0.004")	2-3/8"	2.375"(+/-1/16")
>90,000	0.162"(+0/-0.004")	2-1/2"	2.5"(+/-1/16")
		3"	3"(+/-3/32")
		3-1/4"	3.25"(+/-3/32")
		3-3/8"	3.375"(+/-3/32")
		3-1/2"	3.5"(+/-3/32")