


Specification Grade

1324

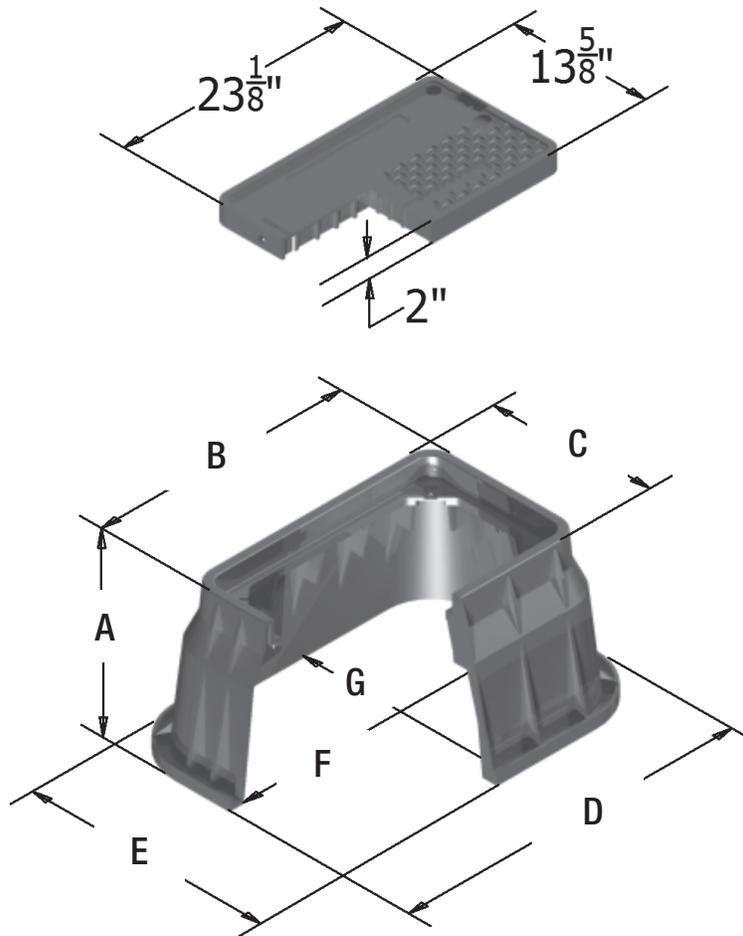

| A | B | C | D | E | F | G |
|---------|---------|---------|---------|---------|---------|---------|
| 12" | 25-1/4" | 15-3/4" | 32" | 22-1/2" | 29" | 19-5/8" |
| 15-1/4" | 25-1/4" | 15-3/4" | 32-3/4" | 23-1/4" | 29-3/4" | 20-1/4" |


COVER:

Style: Flush
 Material: HDPE
 Model: 13" x 24"
 Weight: 6 lbs
 Std. Fasteners: 3/8" Hex Bolt
 Options: Logos and Special Markings
 Surface: Skid Resistant & Marked*
 Performance: Pedestrian, ASTM C857, WUC 3.6,

BODY:

Material: HDPE
 Model: 13" x 24"
 Weight: 12" Depth: 15 lbs
 15" Depth: 17 lbs
 Wall Type: Flared
 Performance: Pedestrian, ASTM C857, WUC 3.6,

GRADE RING

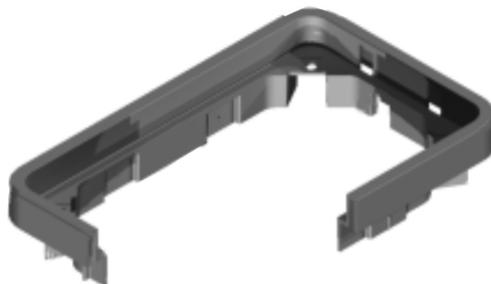

Light Duty:
Pedestrian Only

For use in non-vehicular traffic situations only.

We do not recommend installation in concrete or asphalt.
Coefficient of Friction <0.5

Actual load rating is determined by the box and cover combination.
Weights and dimensions may vary slightly

*Cover comes standard with permanent markings for manufacturer, load rating, model size and manufacturing location.

Contact your Oldcastle Enclosure Solutions Distribution Center for specific information and additional options.

Specification Grade

1324

Options:

Available Plastic Covers:

- Flush Solid (Standard)
- T Cover Solid

Available Plastic Cover Colors:

Black (Standard), Green, Grey, Tan, Purple, Blue

Locking Options for Plastic Covers:

- Bolt Down Feature
- L Bolt Feature
- Drop-N-Lock™


Available Body Colors:

Black (Standard), Green, Grey, Tan, Purple, Blue


Add On Options:

- EMS Marker
- Racking Provision
- Lid Gaskets*


*Lid Gaskets inhibit water flow into the box, they do not make Enclosure fully waterproof.

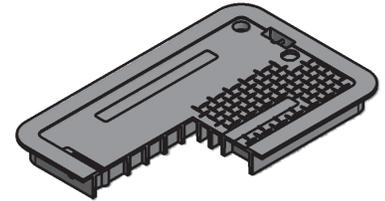


T Solid Cover

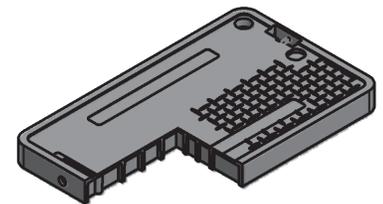

Flush Solid Cover

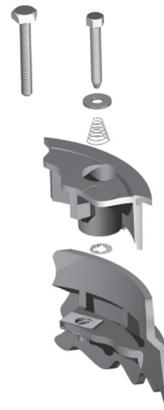

Bolt Down Detail



L Bolt Detail

Raw Material Specifications:

| Material Property | ASTM Test Method | Typical Value ¹ |
|---|------------------|-------------------------------------|
| Type, Class, Category | D 1248 | III, A, 3 |
| Density, g/cm ³ | D 1505 | 0.950 min., not to exceed 0.965 |
| Tensile Strength, at break, psi | D 638 | 3,000 to 4,400 |
| Elongation, at break, % | D 638 | 400 |
| Tensile Impact, ft-lb/in ² | D 1822 | 27 |
| Flexural Modulus, psi | D 790 | 120,000 min., not to exceed 240,000 |
| Low Temperature Brittleness, F50, at °C | D 746 | <-76 |
| Hardness, Shore D | D 2240 | 66 |
| Deflection Temperature, at 66 psi, °F | D 648 | 150° min., not to exceed 200° |
| Electrical Dielectric Strength, V/mil | D 149 | 400 min., not to exceed 600 |
| Molded Product | | |
| Chemical Resistance | D 543 | Very Resistant |
| Water Absorption | D 570 | Less than 1% weight change |

¹The values listed for physical property measurements are nominal values only. Certain physical property measurements are subject to variations consistent with the test methods and are within a generally accepted range for such values.

Product Load Rating:



Light Duty : Pedestrian Only

Note:

Actual load rating is determined by the box and cover combination. Weights and dimensions may vary slightly. All information contained on this sheet is current at the time of printing. Oldcastle Precast, Inc. reserves the right to discontinue or update product information without notice.

