



ZENITH

p H C O N T R O L L E R

INSTRUCTION MANUAL

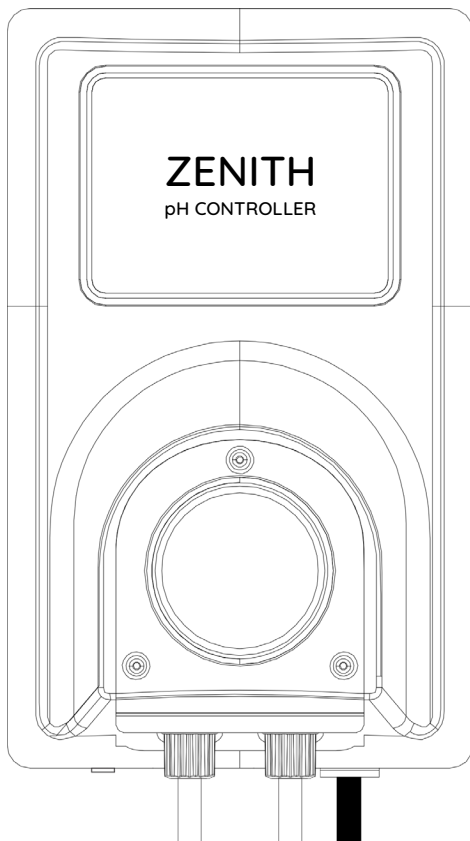


TABLE OF CONTENTS

1.	SAFETY	1
2.	GENERAL OVERVIEW.....	2
3.	SPECIFICATIONS	2
4.	MAINTENANCE.....	3
	4.1 Injection Point on Injector Valve	3
	4.2 Lubricate Squeeze Tube	3
	4.3 Replace Squeeze Tube.....	3
5.	HELPFUL HINTS	3
6.	CONTENTS	3
7.	TOOLS NEEDED	4
8.	POOL PREPARATION	4
9.	INSTALLING THE pH CONTROLLER.....	4
10.	NAVIGATING THE LCD pH MENUS ON YOUR SANITISER	6
	10.1 Accessing the pH Control Menu	6
	10.2 pH Control Mode – Turning ON or OFF the pH Mode	7
	10.3 pH1 Run Time – How the dosing system works.....	7
	10.4 pH2 Demand or Prime – Add acid manually or prime clear flexible PVC tubes.....	9
	10.5 Turning OFF the Zenith pH Controller	10
11.	pH CONTROLLER TROUBLESHOOTING	11
12.	SPARE PART NUMBERS.....	13
13.	WARRANTY	14
14.	DISCLAIMER	14

1. SAFETY

Important Warnings: This manual contains valuable information about the installation, operation, and safe use of this product. This information should be given to the owner and/or operator of this equipment. When installing and using this electrical equipment, basic safety precautions should always be followed. Failure to follow safety warnings and instructions in this manual can result in severe injury and/or damage to your equipment. Read and follow all warning notices and instructions which are included in this manual.

- The pH controller case contains live components internally. There is a danger of electric shock if opened. If the power cord is damaged then it should be replaced by the manufacturer, their agent or similar qualified person, to avoid a hazard.
- The product shall be installed by a qualified person in accordance with AS/NZS 3000 wiring rules.
- The pH controller should be installed in the correct pool zone and connected to supply via a power outlet that is protected by a residual current device (RCD) having a rated residual operating current not exceeding 30 mA. The power outlet should have a degree of protection suitable for the pool zone.
- To reduce the risk of injury, do not permit people with lack of experience and knowledge to use this appliance unless they have been given supervision or instruction concerning use of the appliance.
- To reduce the risk of accidents or incidents, service on the unit should only be performed by a qualified pool service professional, after disconnecting it from the mains power supply.
- During the installation check the following:
 - That the injector point pressure is lower than 150 kPa (to ensure optimum flow).
 - That the peristaltic pump's acrylic front cover is correctly fitted.
 - That the suction tube is securely fitted in the acid container, with weight touching the bottom and the drum label is fitted on the outside of the container.
 - That the suction tube is fitted to the left side and the injector tube to the right.
 - That the injector valve o'ring is fitted between the valve and the CLEAR faucet tee and the BLACK lock nut is securely fastened.

Important Safety Instruction: When mixing acid with water, **ALWAYS ADD ACID TO WATER. NEVER ADD WATER TO ACID.** Always wear the appropriate safety equipment specified by the acid supplier when handling acid.

The system uses a **1 : 3 Acid : Water** mix ratio (e.g. with a 20-litre drum add 15 litres water then 5 litres acid). It is important to use this mix for the correct acid volume to be added.

DO NOT PLUG IN IF CARTON IS WET.

Should you require further information visit www.superpool.net.au



When using the Zenith pH Controller:

- Observe all applicable local, state, and federal safety regulations.
- Take proper precautions with prescribed environmental and operational conditions.
- Consider chemical compatibility with all wetted materials.

2. GENERAL OVERVIEW

Congratulations on your recent purchase of your *SUPERPOOL* Zenith pH Controller by Pool Systems. Please read the entire manual before installing your new unit. Your Zenith pH Controller must be installed and operated as specified.

While every effort has been made to ensure that the information contained in this guide is accurate and complete, no liability can be accepted for any errors or omissions. We reserve the right to change the specifications of the hardware and software described herein at any time without prior notice.

The pH in your swimming pool will slowly rise due to factors such as alkalinity, the addition of fresh water and as sanitiser is produced in a salt/mineral water system. A rise in pH reduces the effectiveness of the sanitiser, so it is important to ensure that the pH remains in the correct range.

The pH of the water can be lowered by the addition of hydrochloric acid – and if your system has the optional pH control, this can be done automatically. The *SUPERPOOL* Zenith pH Controller uses an algorithm to calculate the acid to be dosed to achieve the correct pH level.

Note: While algorithmic pH control is effective, it does not measure the pH level. pH testing should be undertaken manually on a weekly basis to ensure the pH is correct.

3. SPECIFICATIONS

SPECIFICATIONS	
Volts & Amps Input (ac)	220-245 V, 0.1 A
Total Power Consumption)	13 W Motor, 20 W Max.
Frequency	50 Hz
Output as Controlled by Sanitiser	0-1000 ml per hour
Rated Pressure	350 kPa (optimum for injector is 150 kPa)
Squeeze Tube	Tygon® Norprene® (Commercial spec)
Motor Speed	10 RPM
Tubing Size	4 m long x 6 mm diameter Clear Flexible PVC
Power Cord	Approved piggy-back type
Wall Mounting	Simple Click ON - Clip OFF
Water Connection	CLEAR Acrylic Faucet Tee 50 mm pipe
Water Flow Rate (L/min)	80-650 L/min
Ingress Protection Rating	IP 35

- **NOTE:** Certain specifications may change without notice for reasons of improvement or better performance.

4. MAINTENANCE

This pH controller is made from the best engineered practices and materials, please ensure you regularly undertake the following basic maintenance:

4.1 Injection Point on Injector Valve

Check the injection point periodically, by looking through the CLEAR faucet tee, for build-up of solid matter at the end of the clear flexible PVC tubing. This could only occur from contaminants in your acid container and the result is a blockage hindering the flow of acid and reducing the life of the pump tube and roller block. While unscrewing the BLACK lock nut, take care not to lose the rubber O-ring.

4.2 Lubricate Squeeze Tube

Lubricate the pump squeeze tube every 3-6 months. Using a silicone-based lubricant only as petroleum-based lubricants will cause damage to the tube and rollers.

4.3 Replace Squeeze Tube


Depending on usage, the squeeze tube may need replacement after 1-2 years of use. Before replacing, please ensure that the suction and injection tubes are empty. To change the squeeze tube, please follow the instructions included with the replacement kit. Only using the original sized commercial grade Tygon® Norprene® tube as incorrect sizing will result in premature failure of the Tri Roller Block.

5. HELPFUL HINTS


Read and keep your Manual in a safe place.

Test your swimming pool water on a regular basis and take your pool water sample to your local pool professional at least twice a month.

6. CONTENTS

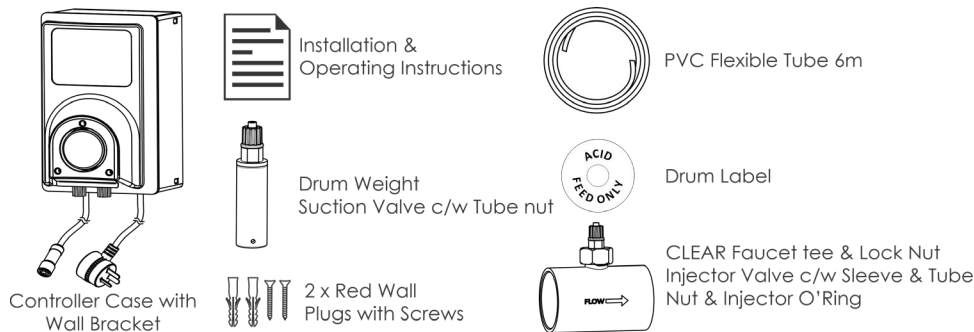

7. TOOLS NEEDED

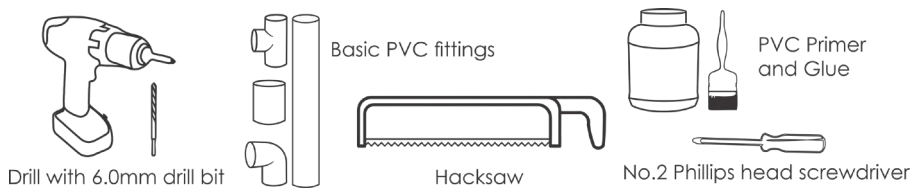

8. POOL PREPARATION

Please ensure that your pH is balanced to the recommended level for your swimming pool surface.


Ideal pH Levels: Concrete Pools: 7.4-7.6
 Fibreglass and Vinyl Pools: 7.0-7.2

A pH of 8.0 makes your chlorine only about 26% efficient so that is why it is critical to keep your pH in range. A correct pH level must be maintained to prevent problems such as black spot, staining, cloudy water etc. An incorrect pH level can damage the surface finish and walls of your pool.

When pH is high you can add Hydrochloric Acid to lower the pH level. When pH is low you can add sodium bicarbonate (soda ash) to increase the pH level.

9. INSTALLING THE pH CONTROLLER

Installation Diagram

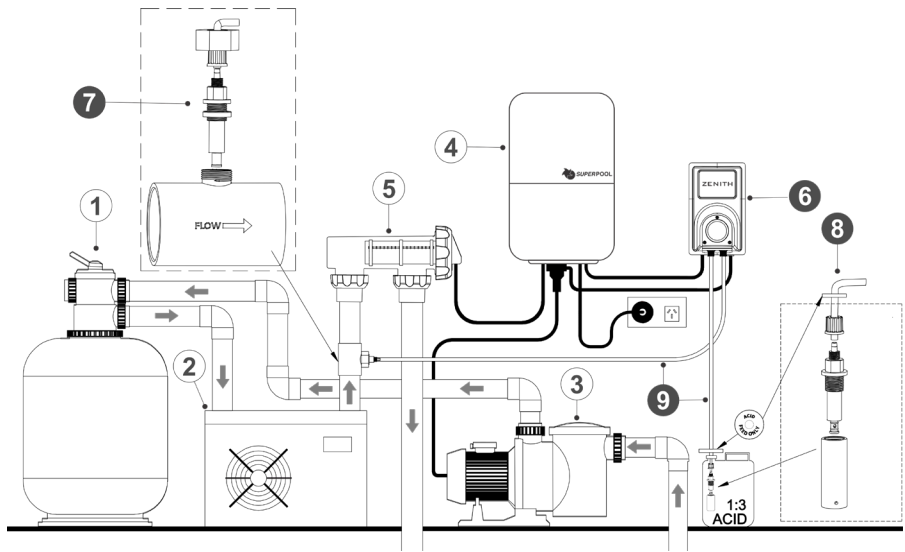

1 ● Pool Filter

2 ● Heat Pump

3 ● Pool Pump

4 ● Pool Sanitiser

5 ● Cell Housing

6 ● pH Controller

7 ● Injection with Tee

8 ● Suction with Drum
Weight & Label


9 ● PVC Flexible Tube 6m

STEP 1: Remove the contents from the box and carefully plan all steps using the installation diagram, and by reviewing the steps below.


STEP 2: Position the Zenith pH Controller box as indicated in the installation diagram, ensuring it is NOT too close to other equipment or power outlets, but close enough to the Zenith Salt and Mineral Chlorinator power supply so the piggy-back power cord can plug in to its socket outlet.

STEP 3: Attach the Zenith pH Controller to the wall by removing the simple "Click On – Click Off" wall mounting bracket attached to the controller case. Use the wall plugs and screws provided.

3.1: Press in the wall bracket clips.

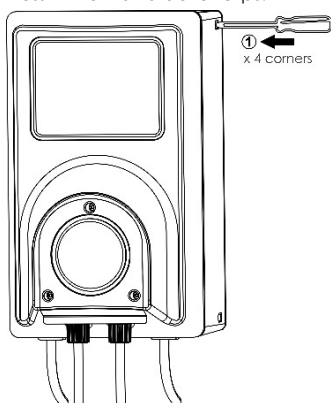

3.2: Pull the wall bracket away from case.

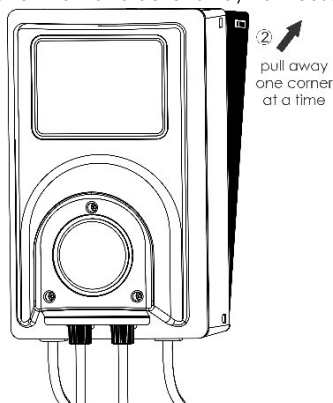

3.3: Mount the bracket to the wall

3.4: CLICK ON the case to the wall bracket

This unique design protects the controller case from any water entry.

STEP 4: Fit the CLEAR faucet tee c/w injection valve to the pool water line, avoiding high pressure areas (i.e., after the pump, filter, and prior to heat pump). It can be installed prior to the cell housing (or after if needed).

STEP 5: Cut and connect a length of clear flexible PVC tube that will reach from the outlet at the base of the peristaltic pump (right side) to the injection valve mounted in the CLEAR faucet tee, using the tube nut to secure the tube.

STEP 6: Do not cut the other length of clear flexible PVC tube yet. Place the acid drum (with the required mix) in the required position, in a ventilated area, preferably not near this or other pool equipment (at least 2 m or more away), as the acid is corrosive and equipment damage will occur.

The system uses a **1 : 3 Acid : Water** mix ratio (e.g. with a 20-litre drum add 15 litres water then 5 litres acid). It is important to use this mix for the correct acid volume to be added.

Important Safety Instruction: When mixing acid with water, **ALWAYS ADD ACID TO WATER. NEVER ADD WATER TO ACID.** Always wear the appropriate safety equipment specified by the acid supplier when handling acid.

STEP 7: Pass this clear flexible PVC tube through the drum label and a 6.0 mm hole in the acid drum vent cap. Connect the clear flexible PVC tube to the suction valve that is mounted to the drum weight, using the tube nut to secure the tube. Before placing the tubing into the drum, measure the tubing against the outside of the drum and measure the feed tubing so that there is sufficient tubing. Lower the drum weight into the acid drum and screw on the drum cap.

STEP 8: Connect the pH Signal Cable with 5 Pin Plug to the *SUPERPOOL* Zenith Salt & Mineral Chlorinator programming cable port. This is where the signal from the chlorinator comes from to turn the pH controller ON & OFF.

STEP 9: Connect the piggy-back power cord to the AC socket outlet of the Zenith Salt & Mineral Chlorinator and the pool pump plugs in to the other end of the piggy-back socket.

STEP 10: Start up your pool pump and check the system for any leaks. Repair any such issues.

STEP 11: Prime the acid feed lines and finalise run settings using the menus below.

10. NAVIGATING THE LCD pH MENUS ON YOUR SANITISER

As fresh water is added, or chlorine is produced, the pool pH will slowly increase. This can be offset by adding small doses of acid to the pool automatically. This pH controller uses a maintenance free algorithm that calculates the amount of acid per dose, which is needed to maintain the pH level. Initially it is based on the size of your pool, but through your testing, it can smartly be adjusted to make it truly near-maintenance free for you the owner.

NOTE: It is important that the system is initially adjusted based on pH result to suit your pool and that pool pH is still checked regularly.

10.1 Accessing the pH Control Menu

These are the menus on the *SUPERPOOL* Zenith Salt & Mineral Chlorinator.

PROCEDURE	On the Zenith Chlorinator power pack press OK to access the Main Menu and use the +/- buttons to scroll through the menu until the LCD reads 'pH Control Mode' – press OK to enter this mode.
LCD DISPLAY	13 Winter/Blanket 14 pH Control Mode [+]UP [-]DN [OK]ENTER

10.2 pH Control Mode – Turning ON or OFF the pH Mode

The default setting on the chlorinator is for the acid dosing system to be 'OFF'. This needs to be turned to 'ON' to operate the Zenith pH Controller.

PROCEDURE	To turn ON the acid dosing of the pH controller, enter the 'pH MODE' menu from the 'pH Control Mode' menu explained in 10.1, using the [+], [-] & [OK] button change the selection from OFF to ON.
LCD DISPLAY	pH CONTROL MODE pH Mode: OFF [+] or [-] to change [OK] SAVE [<] BACK

10.3 pH1 Run Time – How the dosing system works

The c 'pH1 Run Time' is programmed automatically when setting up the volume of the swimming pool in the chlorinator. The system calculates the minutes per day your pH controller should run based on the volume of your pool, and this can be manually changed.

PROCEDURE	To adjust the run time, enter the 'pH1 Run Time' menu from the 'pH Control Mode' menu explained in 10.1, using the [+], [-] & [OK] button.
LCD DISPLAY	pH CONTROL MODE pH1 Run Time pH2 Demand or Prime [+]UP[-]DN [OK]ENTER

PROCEDURE The LCD will now show 'On Time: ---min/day'.
Press [+] or [-] to adjust the ON Time in min/day.
Pressing [OK] saves the required run time and returns to you to the main menu. Saving this Run Time will result in the time being saved as the new default running time of the unit.
Entering 0 min/day means the system will not run at all.

LCD DISPLAY

pH1 RUN TIME
ON Time: ---min/day
[+] or [-] to change
[OK] SAVE [<] BACK

Record your readings and notes here:

10.4 pH2 Demand or Prime – Add acid manually or prime clear flexible PVC tubes

The 'pH2 DEMAND or PRIME' quantity can be manually adjusted from 0 - 5000 ml. The default reading is always 100 ml. This function is useful for:

- Priming tubes after an acid drum change.
- Adding the required acid from your acid demand test.



IMPORTANT: Enter the exact amount from your test result in ml (e.g., 500 ml) and the system automatically adds 4 times that amount, thereby allowing for the 1 : 3 ACID: WATER mix ratio in the acid drum.

PROCEDURE To enter a required amount of acid in mL, enter the 'pH2 Demand or Prime' menu from the 'pH Control Mode' menu explained in 10.1, using the [+], [-] & [OK] button

LCD DISPLAY

pH CONTROL MODE
pH1 Run Time
pH2 Demand or Prime
[+]UP[-]DN [OK]ENTER

PROCEDURE The LCD will now show 'Acid Demand: 100 ml'. Press [+] or [-] to adjust the quantity of acid required in millilitres (ml). Pressing [OK] saves the required quantity, the peristaltic pump starts turning and the ml reading starts counting down. You can adjust the quantity in this menu if you wish or you can press [<] and return to the chlorinator default display screen. If the lines are primed, you can stop the peristaltic pump by entering a reading of '0 ml'.

LCD DISPLAY

pH2 DEMAND OR PRIME
Acid Demand: 100 ml
[+] or [-] to change
[OK] SAVE [<] BACK

10.5 Turning OFF the Zenith pH Controller

Enter the pH Control Mode menu on the *SUPERPOOL* Zenith Salt & Mineral Chlorinator.

PROCEDURE	On the Zenith Chlorinator power pack press OK to access the Main Menu and use the [+] / [-] buttons to scroll through the menu until the LCD reads 'pH Control Mode' – press [OK] to enter this mode.
LCD DISPLAY	13 Winter/Blanket 14 pH Control Mode [+]UP [-]DN [OK]ENTER

If the setting on the chlorinator has previously been set for the acid dosing system to be 'ON' and the system needs to be turned 'OFF' use the following procedure.

PROCEDURE	To turn OFF the acid dosing of the pH controller, press [OK] on the 'pH mode: ON' menu from 'pH Control Mode' menu explained in 10.1. Then use the [+] or [-] button to change the selection from ON to OFF and press [OK] to save.
LCD DISPLAY	pH CONTROL MODE pH Mode: ON [+] or [-] to change [OK]SAVE [<] BACK


11. pH CONTROLLER TROUBLESHOOTING

NO	FAULT INDICATION	POTENTIAL CAUSE	REMEDY
11.1	pH controller is not turning on.	pH control mode has not been turned on. pH controller power cord is not plugged in. No demand for it to turn on from the sanitiser. Demand signal is present but peristaltic pump is not turning.	See Manual Section 10.1. Check that power cord is plugged into the sanitiser AC socket outlet. The demand takes place each day at the start of T1 ON time or 8 am (if no T1 ON time is set). Check if signal for pH demand is ON. Contact your service agent.
11.2	Everything displays correctly but pH level is not changing when testing the pool water.	Acid drum is low or empty.	Check acid level and replenish if necessary.
11.3	pH controller is not running when the sanitiser is in AUTO mode.	The pH controller has already operated in today's timer cycle.	The pH controller will not run again if it has already completed its automatic cycle for the day.
11.4	pH controller is running but the pool pump is not on.	Pump is not plugged in or there is a problem with flow.	The system should automatically stop when the pool pump stops but check that there is not a closed valve and that all pool equipment is plugged in and working properly.
11.5	pH Controller tri-roller is turning but acid is not pumping.	Air leaks in the squeeze tube, injector tube or suction tube due to potential breaks. Excessive wear on the squeeze tube. Excessive wear on the tri-roller block.	Check all tubes for damage or leaks and repair such or replace the tubes. Order and replace the squeeze tube kit. Order and replace the entire tri-roller block assembly.
11.6	Water flow returning from pool to the acid drum.	In the unlikely event of this happening, it can only be one of two things: i. Worn/damaged injector sleeve, ii. Worn tri-roller block,	Replace the entire injector valve as a kit, Replace the tri-roller block,

NO	FAULT INDICATION	POTENTIAL CAUSE	REMEDY
11.7	pH level in the pool is too high or too low.	Incorrect pH run time, Incorrect ACID : WATER mix. Incorrect ACID DEMAND amount entered.	Adjust pH run time to suit as per procedure in 10.2. The system uses a 1:3 mix ratio. Ensure you have this required mix. You should only enter the required acid amount and not the ACID : WATER mix amount. If you need 500 ml acid, then enter this. The system allows for the 1:3 mix.

12. SPARE PART NUMBERS

SUPERPOOL ZENITH pH CONTROLLER SCHEMATIC

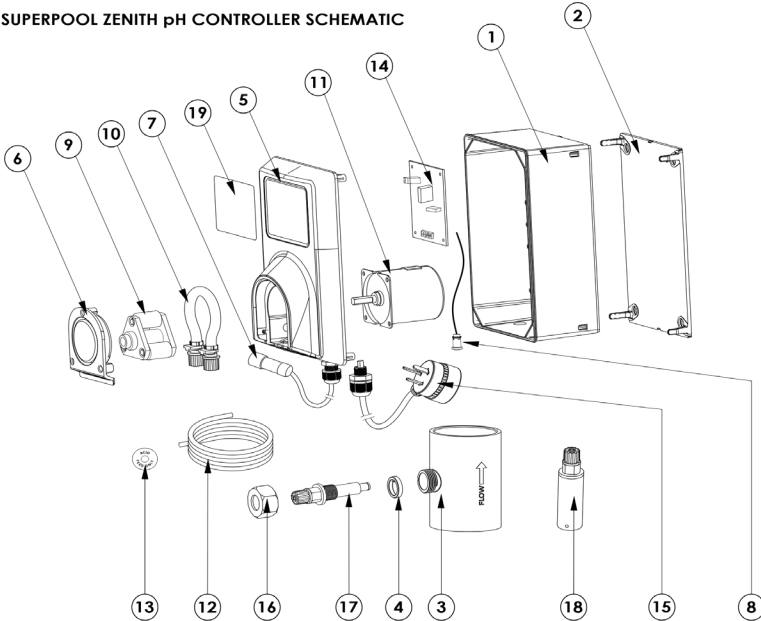

PART NO	REORDER CODE	QTY	DESCRIPTION
1	CYQ-451-91034	1	BASE BODY ZENITH PH CONTROLLER
2	CYQ-451-91035	1	WALL BRACKET ZENITH PH CONTROLLER
3	CYQ-451-91036	1	FAUCET TEE 50MM 3/4" CLEAR ZENITH PH CONTROLLER
4	CYQ-451-91037	1	O'RING SEAL F/INJECTOR VALVE ZENITH PH CONTROLLER
5	CYQ-451-91038	1	CASE FRONT COVER ZENITH PH CONTROLLER
6	CYQ-451-91039	1	ACRYLIC COVER CLEAR ZENITH PH CONTROLLER
7	CYQ-451-91040	1	SIGNAL CABLE ZENITH PH CONTROLLER
8	CYQ-451-91041	1	WIRE LOOM CONNECTION CABLE ZENITH PH CONTROLLER
9	CYQ-451-91042	1	TRI ROLLER ZENITH PH CONTROLLER
10	CYQ-451-91043	1	SQUEEZE TUBE KIT ZENITH PH CONTROLLER
11	CYQ-451-91044	1	MOTOR ZENITH PH CONTROLLER
12	CYQ-451-91045	1	FLEXIBLE TUBING PVC CLEAR ZENITH PH CONTROLLER
13	CYQ-451-91046	1	DRUM LABEL ZENITH PH CONTROLLER
14	CYQ-451-91047	1	PCB MAIN POWER ZENITH PH CONTROLLER
15	CYQ-451-91048	1	POWER CORD ZENITH PH CONTROLLER
16	CYQ-451-91049	1	LOCK NUT F/INJECTOR ZENITH PH CONTROLLER
17	CYQ-451-91050	1	NON RETURN INJECTOR VALVE ZENITH PH CONTROLLER
18	CYQ-451-91051	1	DRUM WEIGHT KIT ZENITH PH CONTROLLER
19	CYQ-451-91052	1	FRONT STICKER ZENITH PH CONTROLLER

13. WARRANTY

This product is warranted for (12) twelve months against defects in workmanship and materials if used for its intended purpose and maintained according to instructions. This warranty is limited to repair or replacement, depending on the problem of the product. If the product is found to have been misused or damaged due to water entry/mechanical damage/accidental damage, this will not be covered under warranty, and, in such cases, no warranty will apply.

What is covered? Repairs/parts/factory labour, or a replacement unit if applicable.

What is not covered? Damage due to accident, misuse, water penetration of the handheld enclosure, tampering, or lack of prescribed maintenance is not covered under this limited warranty.

Should you need to lodge a warranty with your place of purchase, ensure to include the product serial number, purchase date, and type of failures. If returned, ensure proper packaging so that no additional damage occurs during transport. The customer is liable to return the Zenith pH Controller.

This limited warranty is the sole and complete warranty and shall be limited to the cost of the meter. In no event shall Pool Systems be liable for incidental or consequential damages.

14. DISCLAIMER

Pool Systems has made every attempt to ensure the accuracy and reliability of the information provided in this manual. However, the information is provided "as is". We shall not be liable for any loss or damage of whatever nature (direct, indirect, consequential, or other), which may arise due to the use of this product.

