

Save time and money with a simplified connection that meets special NEC® requirements.

Designed to save time

- Factory-installed ground bar—no kits required
- Factory-assembled circuit breaker
- Bottom fed or top fed using a raintight hub
- Outdoor enclosure

Designed for safety

- Padlockable door prevents unauthorized persons from switching the breaker off
- Push-to-trip button easily allows routine breaker testing
- Meets code requirements for a safety disconnect

New blink code system makes it easier to diagnose line faults

6	Startup sequence
2	Digital command error
3	Microprocessor error
4	GFCI hardware error
2	Power quality issue
2	Over-voltage
3	Over-current trip
2	Grounded neutral fault
3	Low-level ground fault
4	High-level ground fault
5	Cold-start ground fault
	Mechanical trip (ex: short circuit)

Ordering information

Contact your local Eaton representative today for more information about Eaton's spa panels or **scan the QR code**.

Warranty

- **10-year limited warranty on Type BR spa panels, thermal-magnetic and GFCI branch breakers**

Quick Pro℠ LABOR SAVING SOLUTION

Powering Business Worldwide

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

© 2026 Eaton
All Rights Reserved
Printed in USA
Publication No. SA00308001E
May 2026

Eaton spa panels

Reliable protection



Powering Business Worldwide

Eaton Spa Panels available 40-60A

Type BR

Features

- 10-year warranty
- UL® Listed
- Factory-installed two-pole ground fault circuit interrupter (GFCI)
- Two extra circuits for additional loads
- Tough powder-coated galvanized steel enclosure








Type BR two-pole GFCI

Product selection

Catalog number	Main ampere rating	Enclosure type	Dimensions in inches	Factory-installed circuit breaker	Wire size range Cu/Al 60 °C or 75 °C for main lugs
BRSPA40	40	Outdoor	11.5"H x 6.5"W x 4.25"D	BRN240GF	#14-#1
BRSPA50	50	Outdoor	11.5"H x 6.5"W x 4.25"D	BRN250GF	#14-#1
BRSPA60	60	Outdoor	11.5"H x 6.5"W x 4.25"D	BRN260GF	#14-#1

The National Electrical Code® safety requirements for spa pumps:

- GFCI protection
- Visible disconnect

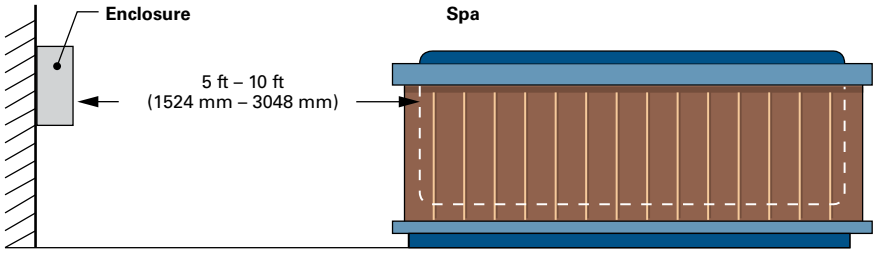

Check national and local codes for compliance.