

LAZER Z[®]

X-SERIES

UNMATCHED PERFORMANCE.
MAXIMUM COMFORT AND PRODUCTIVITY.
LEGENDARY DURABILITY.



For the past 25 years, Exmark's Lazer Z[®] has been considered the gold standard in commercial-grade, zero-turn excellence. Pro cutters and homeowners have aspired to experience their superior cut quality, productivity, durability and performance. Built for easier maintenance and longer life, our Lazer Z mowers are simpler, tougher, and easier to operate.

FEATURES:

- Equipped with Kawasaki[®] or Kohler[®] engines.
- UltraCut[™] Series 6 deck with 60- or 72-inch cutting widths.
- Select models equipped with the next-generation RED Technology.
- Heavy-duty canister air filtration system.
- Two Exmark[®] exclusive Parker unitized pump and wheel motor systems with no hoses.
- Ground speeds up to 11.5 mph.




ON-BOARD INTELLIGENCE

The next-generation RED leverages the latest technologies to deliver increased machine efficiency, ease of use and durability. This technology provides users an increased ability to control mower power and efficiency with defined performance modes.



ULTRACUT DECK TECHNOLOGY

When it comes to durability, Exmark's UltraCut decks are among the strongest in the industry and set the standard for productivity and quality of cut. Available with an UltraCut Series 6 with side discharge, these decks have a 5.5-inch deep design, formed and welded to provide superior strength and durability.

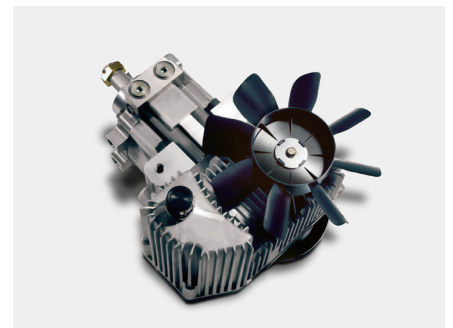

HYDRO-DRIVE SYSTEM

Our engineers devised a great way to keep hoses from leaking. They eliminated them. Then they added a few new things: tougher bearings, an improved cooling system and increased oil capacity.

The mowers landscape professionals trust 2 to 1.*

exmark.com

*Trusted 2-to-1 over the next best-selling brand of zero-turn mowers. Based on U.S. Data study by Wiese Research Associates Inc. Market Share and Additional Equipment Study (February 2016).



LAZER Z[®]

X-SERIES

MODEL	ENGINE	SIZE	DECK	WEIGHT	DIMENSIONS (W X H X L)
LZX801GKA60600	FX801V Kawasaki	60"	UltraCut Series 6	1225 lbs.	72.8" x 70.5" x 83.1"
LZX801CKA606C1	FX801V Kawasaki	60"	UltraCut Series 6	1275 lbs.	72.8" x 70.5" x 83.1"
LZX921GKA60600	FX921V Kawasaki	60"	UltraCut Series 6	1227 lbs.	72.8" x 70.5" x 83.1"
LZX980EKC606W0	ECV980 Kohler EFI RED Equipped	60"	UltraCut Series 6	1227 lbs.	72.8" x 70.5" x 83.1"
LZX921GKA72600	FX921V Kawasaki	72"	UltraCut Series 6	1264 lbs.	84.9" x 70.5" x 86.1"
LZX921GKA726C1	FX921V Kawasaki	72"	UltraCut Series 6	1357 lbs.	84.9" x 70.5" x 86.1"
LZX980EKC726W0	ECV980 Kohler EFI RED Equipped	72"	UltraCut Series 6	1196 lbs.	84.9" x 70.5" x 86.1"



Side Discharge
with Suspension Platform



Rear Discharge with **RED**

POWER COMPONENTS

Engine – ECV980 Kohler Command EFI; FX801V and FX921V Kawasaki engines. All engines governed to 3,750 rpm except RED units are 3,650 rpm.

Air Filter – Heavy-duty canister air filtration system.

Drive System – Two Exmark® exclusive Parker unitized pump and wheel motor systems with no hoses, integrated cooling fans, 1.7-quart integrated reservoir, spin-on filter and heavy-duty components. 16cc pumps and 17.1 cubic inch motors with shock valves.

Hydro Fluid – Exmark Premium Hydro Oil.

Speed – Infinitely variable speed selection from 0–11.5 mph (18.5 kmph) forward, 0–7.0 mph (11.3 kmph) reverse.

PTO Engagement – MagStop® Electromagnetic 250-ft-lbs clutch with spot brake except FX801V has 200-ft-lbs.

Fuel Capacity – High-capacity, 12-gallon (45.4-L), single fuel tank with single fill location.

Drive-Wheel Release – Allows unit movement without engine running.

Safety Package – Operator Presence Controls (OPC) and drive system interlock, with safety interlock system indicators.

Rollover Protection System (ROPS) – 2-post foldable ROPS standard with seat belt and latch.

Quick Deck Lift – Standard; foot-controlled deck lift changes cutting height and lifts the deck to maneuver around obstacles, or place in transport position.

DECK

Style – Full-floating UltraCut Series 6 featuring a heavy-duty spindle. Side-discharge standard with the option to bag or mulch.

Deck Construction – 10-gauge top that is formed and continuously seam welded, 7-gauge side skirt and 7-gauge formed and welded spindle mounting reinforcements for improved strength and reduced weight. 4-point suspension, full floating deck. 72" unit has 6 adjustable, cone-shaped, anti-scalp rollers. 60" unit has 4 adjustable, cone-shaped, anti-scalp rollers.

Widths Available – 60" (152 cm) and 72" (183 cm).

Cutting Height – 1.0" (2.5 cm) to 5.5" (11.8 cm) in 0.25" (0.64 cm) increments adjustable from operator's seat.

Blade Spindles – No maintenance, sealed and non-greasable spindles; 7.75"-diameter cutter housing with 1.75"-diameter splined blade driver and 30mm diameter spindle shaft.

Blade-Tip Speed – Approximately 18,500 fpm.

EQUIPMENT

Tractor Frame – Unibody, welded, heavy-duty 1.5" x 3" tubular steel.

Steering and Motion Control – Hydraulically dampened twin levers, adjust fore and aft, also adjustable to 2-height positions. Adjustable dampers (3-positions) to customize drive responsiveness.

Casters – .50" thick caster yoke arm.

Front Caster Tires – 13 x 6.5–6 smooth tread, semi-pneumatic tires.

Drive Tires – 24 x 12.0–12, 4-ply Turf Master.

Turning Radius – True zero-turn.

Parking Brake – Lever-actuated disc brake.

Seat Comfort – Deluxe, bolstered suspension seat with Elastomeric Vibration Control material. Mounted on innovative Seat Isolation System that provides operator isolation in all three planes of motion as well as fore-aft slide and seat flip-up. C1 models include a suspension platform. The suspended operator platform maximizes productivity through increased operator comfort.

Onboard Intelligence – W0 models are equipped with Next-Generation RED technology.

Electrical – All have 12-volt battery. 15-amp alternator on Kawasaki units. 20-amp on Kohler units.

Standard Features – Engine hour meter and cup holder.

ACCESSORIES & OPTIONS

3-Bushel Bagger, 12-Volt Power Adapter, Air Ride Anti-Scalp Kit, Suspension Seat, Equipment Cover, Extended Drive Lever, Floor Mat, Hitch, Hydro Maintenance Kit, Jack and Receiver, LED Light Kit, Micro-Mulch System, Operator Controlled Discharge, Pedal Adapter Kit, Power Deck Lift, Sun Shade, Tractus Tire, Trash Container, Turf Striping Kit and UltraVac Collection Systems

WARRANTY

Limited Warranty: 5-Year or 1,500 Hours (with No Hour Limit First 2 Years), 3 Year Engine



EXMARK MANUFACTURING COMPANY INC. • 415 INDUSTRIAL ROW • BEATRICE, NE 68310 • Call 402.223.6300 • exmark.com

Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. We reserve the right to improve our products and make changes in specifications, designs and standard equipment without notice and without incurring obligations. See your dealer for details on all of our warranties. Exmark® and Lazer Z® are registered trademarks of Exmark Mfg. Co., Inc. Exmark is purchased 2 to 1 over the next best-selling brand of zero-turn mowers based on U.S. Data study by Wiese Research Associates, Inc. Market Share and Additional Equipment Study (February 2016). ©2020 Exmark Manufacturing Company, Inc. All Rights Reserved. Printed in the U.S.A. 2020. Rev 1.