

SPE	CIF	CAT	ION	SHF	
	$\mathbf{O}$ II				

Type:

Model:

# MANDARIN Wildlife Safe Path Light

# **ORDERING CODE:**

490024

### **SPECIFICATIONS**

## HOUSING:

Cast brass.

### FINISH:

Weathered brass. Custom powder coated colors available.

### STEMS

 $10\ensuremath{^{"}}$  (Model 490025), 16\ensuremath{^{"}} (Model 490023) and 18\ensuremath{^{"}} (Model 490026) stems are sold separately.

### I FNS:

Clear polycarbonate lens.

# **SOCKET/LAMP HOLDER:**

One fixed ceramic bi-pin socket in stem accepts bi-pin lamps with G4 or GY6.35 bases.

### **LAMP TYPE:**

12V bi-pin. LED recommended. Halogen 30W maximum or 6W LED maximum.

### **MOUNTING:**

Threaded with ½" NPT. Heavy-duty composite stake included with stem, sold separately. May be mounted into threaded hubs in junction boxes or other mounting accessories.

### WIRING:

Stem (sold separately) is pre-wired with 5' pigtail of 18/2 cable.

### **WARRANTY**:


Lifetime.

# **ARCHITECTURAL COLORS:**

FINE TEXTURE SILVER	490024-S	
FINE TEXTURE WHITE		490024-WH
FINE TEXTURE BLACK		490024-BLK



# **DIMENSIONS:**

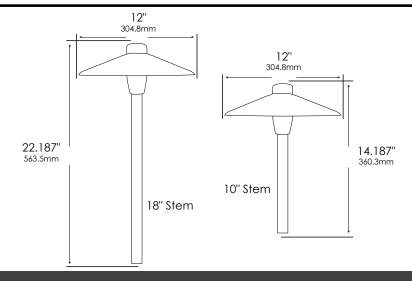



# **LED LAMP SPECIFICATIONS**

### LAMP TYPE:

12V Dauer bi-pin with 5-year warranty, dimmable, and suitable for enclosed luminaires.

### **COLOR TEMPERATURES:**

Wildlife-approved, amber and red.

These fixtures are only deemed wildlife approved if they utilize a wildlife-approved amber or red bulb as per the chart below.

# C. LICATION US

# **FIXTURE ORDERING INFORMATION**

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 490024-490025-487117-WL-MS

FIXTURE	STEM	LAMP				MOUNTING		
490024 490025 490024-S (10") 490024-WH 490024-BLK 490023 (16")		ORDER NO.	COLOR	DESCRIPTION	WATTAGE	NANOMETER RANGE	MS Composite stake (incl.) 490034	
	(10")	487122-WL	Amber-WL	Encap. Bi-pin G4	4w	585-595	<b>M3</b> Trident Heavy-Duty 3-Prong Stake 490036	
		487120-WL	Red-WL	Bi-pin G4	3w	610-645	<b>PM</b> Round pier mount 490057	
	(16") 490026	487117-WL	Amber-WL	Bi-pin G4	3w	585-595	MR Round tapered 3-hole surface mount 490048	
	(18")						MP PVC/Brass post stake 490037	