

Type:

Model:

**WALDORF Brass LED Mini Flood Light
With Shroud**

SPECIFICATIONS

VOLTAGE:
12 volts AC/DC.

HOUSING:
Cast Brass.

FINISH:
Weathered brass. Custom powder coated colors available.

MOUNTING:
Threaded with 1/2" NPT. Heavy-duty composite stake included. May be mounted into threaded hubs in junction boxes or mounting accessories


WIRING:
Pre-wired five-foot 18/2 SPT1 lead.

WARRANTY:
Ten Years.



Ideal for applications such as landscape lighting, sign lighting, and building accent lighting. 150° (7H x 7V) beam.

DIMENSIONS:

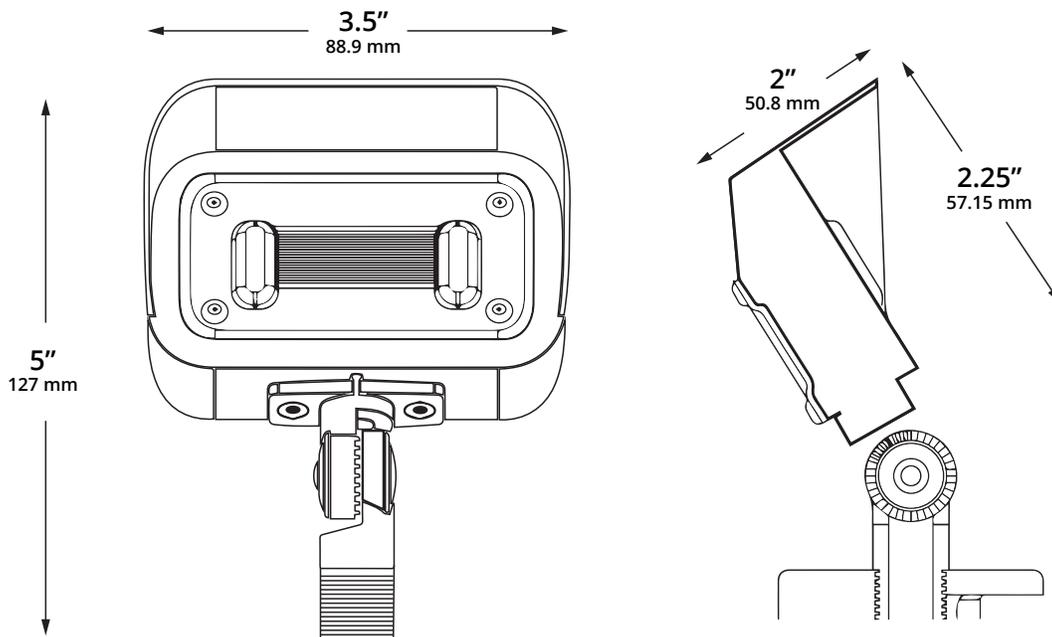

LED LAMP SPECIFICATIONS

LAMP TYPE:

Integrated LED.

OPTICS:

Integral optics providing available beam spreads 150° (7H x 7V) beam.

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K or 3000K.



FIXTURE ORDERING INFORMATION

To order a fixture, select the appropriate choice from each column as in the following example:

EXAMPLE: 489938-MS

Model	489938	489939	Mounting
Description	LED-MF-BR-2W-2700K-12V	LED-MF-BR-2W-3000K-12V	MS Composite stake (incl.) 490034 M3 Trident Heavy-Duty 3-Prong Stake 490036 PM Round pier mount 490057 MR Round tapered 3-hole surface mount 490048 MP PVC/Brass post stake 490037 GM Brass gutter mount 490047
Wattage	2W	2W	
Lumens	153 lm	200 lm	
Efficacy	76 lm/W	100 lm/W	
Volt Amps	3.25 VA	3.32 VA	
Color Temperature	2700K	3000K	
CRI	80	80	