## Path and Area Lights



#### The CB offers soft and safe efficient path lighting

that can be used to increase safety for walkways of all shapes, sizes, and locations. Its sleek hat shape gives it a contemporary look that can accentuate landscapes with a modern flair.

## CB: Path Light

NUMBER OF LEDS:	1	3	ZDC
HALOGEN LUMEN OUTPUT EQUIVALENT:	10 Watt	20 Watt	10 Watt
USEFUL LED LIFE (L70):	50,000 hrs avg	50,000 hrs avg	50,000 hrs avg
INPUT VOLTAGE:	10 to 15V	10 to 15V	11 to 15V
VA TOTAL*:	2.4	4.5	7.2
WATTS USED:	2.0	4.2	6.0
LUMENS PER WATT (EFFICACY):	19	25	26
TOTAL LUMENS:	39	103	83
CRI (Ra):	86	67	84
CCT:			
AMBER FILTER	2700K	2700K	N/A
FROSTED FILTER	3900K	3900K	N/A
GREEN FILTER	4500K	4500K	N/A
BLUE FILTER	5200K	5200K	N/A

<sup>16.2&</sup>quot; / 41.2 cm (with 12" riser)

7.4"/18.8 cm

<sup>\*(</sup>Use this number to size the transformer)



# CB: Path Light

#### FACTORY INSTALLED OPTIONS (TOP + RISER ASSEMBLY): Order 1 + 2 + 3 + 4 (Optional) + 5 + 6 + 7

Step	Description	Code
1	TOP ASSEMBLY	CBLEDTA
2	TOP FINISH	AB*, AT*, CU, NP*, WG, FW, AL, BZ, DG, WI, SB, FB
3	RISER TYPE	G
4	LUXOR OPTION	ZD, ZDC <sup>†</sup> (Color)
5	LAMP	1LED, 3LED,†
6	RISER HEIGHT	8RA, 12RA, 18RA, 24RA, 36RA (in inches)
7	FINISH	AT*, AB*, CU, NP*, WG, FW, AL, BZ, DG, WI, SB, FB


## EXAMPLE: Top Assembly-Top Finish + Riser Type-Luxor Option-Lamp-Riser Height-Riser Finish CBLEDTA-FB + G-ZD-1LED-18RA-FB

#### FIELD INSTALLED OPTIONS: Order Individually

Mounting Options			
Long Slot Spike (250015840000) 2.5" x 10" Included			
SuperJ-Box ( <i>SJ-XX**</i> ) 2.5" x 12"	£ (2)	Y	
Post Mount ( <i>PM-XX**</i> ) 2.5" x 13"		<b>↓</b>	
Versa Box (VB-050-XX**) 2.2" x 1.5"		•	
3-Prong Spike (250020020000) 5.1" Diam. x 9.0" tall	Long Slot Spike	Super J-Box XX**	Post Mount XX**

#### EXAMPLE: 753900 = Super Slot Spike

#### PHOTOMETRICS:

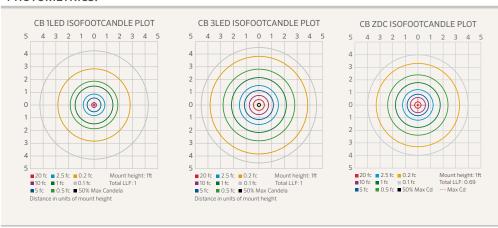

Beam angle is calculated using LM-79 method for SSL Luminaires:

#### METALS



**AT** = Antique Tumbled\* (On Brass/Copper)



**AB** = Antique Bronze\* (On Brass/Copper)



 $\mathbf{CU} = \mathsf{Copper}$ 



**NP** = Nickel Plate\*

#### POWDER COAT



**WG** = White Gloss



**FW** = Flat White



AL = Almond



**BZ** = Bronze Metallic





**DG** = Desert Granite



**WI** = Weathered Iron



SB = Sedona Brown



FB = Flat Black

The CB and G-riser include choice of LED board, riser size, finish, 3 ft. lead wire and Long Slot Spike.



All CB path lights come standard with amber, green, blue and frosted filters

Note: Only the copper portions of the path lights are powder coated. The brass pieces remain natural, except on Antiqued or Nickelplated finishes

\* May require longer lead time

<sup>&</sup>lt;sup>†</sup> Fixtures specified with ZDC Technology<sup>™</sup> are available only in one circuit board configuration. Do not specify a number of LEDs when ordering.

<sup>&</sup>quot;Beam angle is defined as two times the vertical angle at which the intensity is 50% of the maximum."

<sup>\*\*</sup> Denotes finish code