




The QZ is the smallest up light offered in the FX LED line. With only a 1LED option it's capable of all the same features and optics of the larger LED up lights like the NP and FB, but in a smaller package. The QZ is also capable of zoning and dimming on a Luxor ZD System with the added ZD option.

QZ: Up Light

NUMBER OF LEDS:	1
HALOGEN LUMEN OUTPUT EQUIVALENT:	10 Watts
USEFUL LED LIFE (L70):	50,000 hrs avg
INPUT VOLTAGE:	10 to 15V
VA TOTAL: (Use to size the lighting controller)	2.4
WATTS USED:	2.0
LUMENS PER WATT (EFFICACY)	34.9
MAX LUMENS:	62
CRI (Ra)	79.8

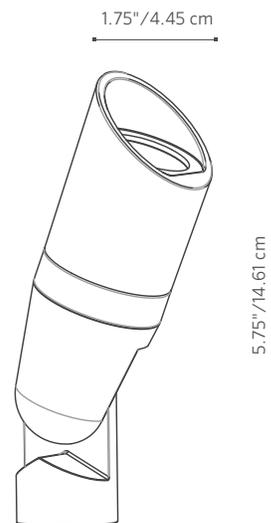



QZ: Up Light

FACTORY INSTALLED OPTIONS: Order 1 + 2 (optional) + 3 + 4

Step	Description	Code
1	FIXTURE	QZ
2	OPTIONAL ZD	ZD (Refer to the Luxor page in the Lighting Control section)
3	LAMP	1LED (50,000 avg. life hours)
4	FINISH	WG, FW, AL, BZ, DG, WI, VF, SB, FB


EXAMPLE: QZ-ZD-1LED-WI = QZ - ZD Option - 1LED Board - Weathered Iron Finish

FIELD INSTALLED OPTIONS: Order Individually

Mounts	Beam Angle Lenses
Long Slot Spike (Included) (250015840000) 2.5" x 10"	LENS OPTIONS 1LED
Super Slot Spike (753900) 2" x 10"	Diffuser 18° (preassembled/most fixtures) 770600
SuperJ-Box (SJ-XX**) 2.5" x 12"	Flood Lens 30-32° (1 notch) 1LEDFLLENS
Post Mount (PM-XX**) 2.5" x 13"	Wide Flood Lens 56-58° (2 notches) 1LEDWFLENS

EXAMPLE: 753900 = Super Slot Spike

PHOTOMETRICS:

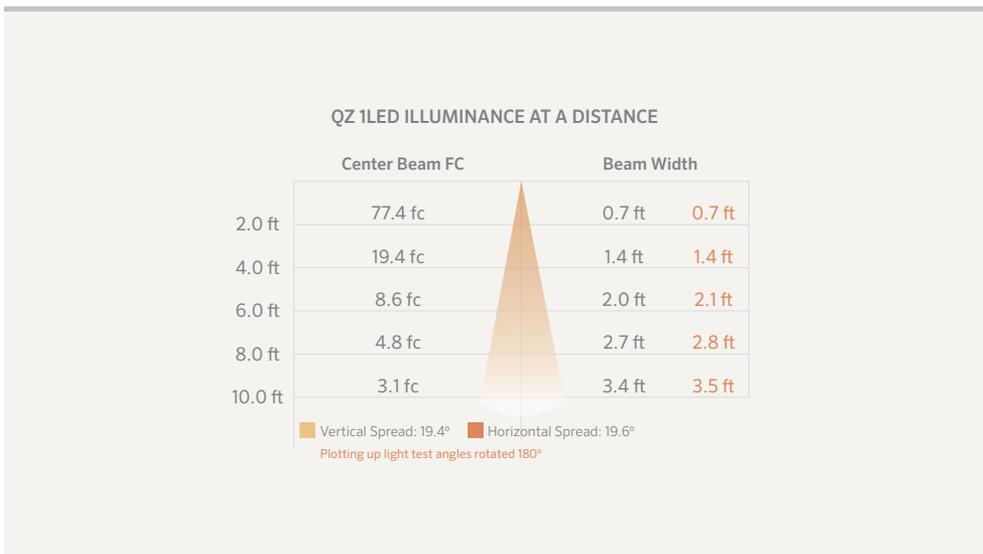

Beam angle is calculated using LM-79 method for SSL Luminaires:
 "Beam angle is defined as two times the vertical angle at which the intensity is 50% of the maximum."

POWDER COAT

	WG = White Gloss
	FW = Flat White
	AL = Almond
	BZ = Bronze Metallic
	DG = Desert Granite
	WI = Weathered Iron
	VF = Verde Speckle
	SB = Sedona Brown
	FB = Flat Black

The QZ includes a 1 LED board, your choice of finish, 4 ft lead wire and a Super Slot Spike.

All QZ up lights come standard with amber, green, blue and frosted filters

** Denotes finish code

