

## VE LED Down Light

DESIGNER PREMIUM



The VE softly illuminates areas from above when hung from trees or architectural elements. Perfect for producing a moonlighting effect for seating areas, focal points, or landscaping features in 1 or 3 LED.

### Quick Facts


- Die-cast aluminum with optional copper sleeve
- Two-layer marine-grade anodization and powder coat finish
- Natural, powder coated, or antiqued copper finishes
- Lumileds® Integrated LEDs
- Compatible with Luxor® technology
- Phase and PWM dimmable
- Input voltage: 10-15V

PROJECT \_\_\_\_\_

CATALOG # \_\_\_\_\_

TYPE \_\_\_\_\_

NOTES \_\_\_\_\_

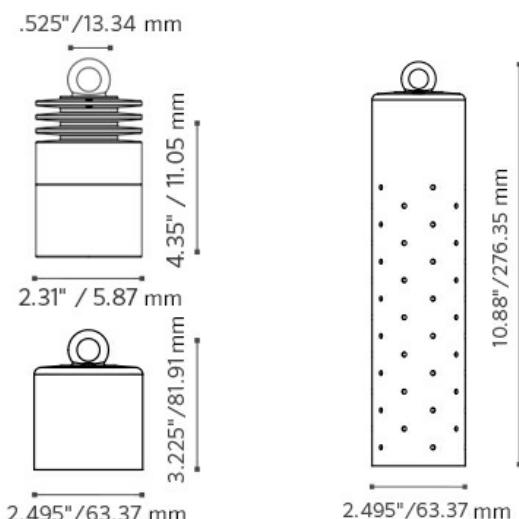

# VE LED Down Light SPECIFICATIONS

| Output                              | 1LED           | 3LED           | ZDC                  |
|-------------------------------------|----------------|----------------|----------------------|
| <b>Total Lumens<sup>†</sup></b>     | 91             | 221            | 130                  |
| <b>Input Voltage</b>                | 10 to 15V      | 10 to 15V      | 10 to 15V            |
| <b>Input Power (W)</b>              | 1.9            | 4.0            | 6.0                  |
| <b>VA</b>                           | 2.2            | 4.4            | 7.2                  |
| <b>Efficacy (Lumens/Watt)</b>       | 50             | 57             | 39                   |
| <b>Color Rendering Index (CRI)</b>  | 83             | 84             | 80+                  |
| <b>Maximum Candela</b>              | 88             | 225            | 198                  |
| <b>Dimming</b>                      | PWM, Phase**   | PWM, Phase**   | PWM, Phase**         |
| <b>RGBW Available</b>               | No             | No             | Yes                  |
| <b>Luxor Compatibility</b>          |                |                |                      |
| <b>Default</b>                      | Zoning         | Zoning         | --                   |
| <b>ZD Option</b>                    | Zoning/dimming | Zoning/Dimming | --                   |
| <b>ZDC Option</b>                   | --             | --             | Zoning/Dimming/Color |
| <b>Minimum Rated Life L70 (Hrs)</b> | 72,000         | 72,000         | 55,000               |

\*\* For optimal performance, use a trailing-edge, phase-cut dimmer.

† Measured using the 3,900K CCT lens. Multipliers for other CCTs include 0.80 (2,700K), 0.65 (4,500K), and 0.65 (5,200K).

# VE LED Down Light SPECIFICATIONS

## About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

## Materials

Die-cast A380 aluminum housing and shroud with stainless steel setscrew, hanging cable, and cable lock.

## LED

Integrated module with Cree LEDs. Gold-plated connectors and conformal coated for maximum reliability and corrosion resistance. Proprietary on-board intelligent driver uses firmware-controlled temperature regulation, maximizing LED life. Field upgradeable and replaceable, the LEDs are rated to 50,000 hrs. Maximum drive current: 1 A.

## Optics

Polycarbonate color temperature adjustment lenses included with fixture: 2,700K (preinstalled), 3,900K (no lens), 4,500K, and 5,200K. Interchangeable optics for 10°, 20°, 30°-32°, or 55°-58° distributions ordered pre-assembled to fixture. Color temperature and beam angle lenses field serviceable. For additional color filters, spread lenses, hex baffles, etc., use MR-16 sized accessories (MR-16: 1.95" (50 mm) dia. x 1.1 mm thickness). Beam angle is calculated using LM-79 method for SSL luminaires.

## Finish

Two-layer protection of sulfuric acid anodization and polyester TGIC powder coat, providing superior outdoor weathering in all conditions. Tested to ASTM standards.

## Hardware

Includes stainless steel cable with cable lock. Tamper-resistant setscrew included.

## Wiring

18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 26' (8 m) length.

## Sockets

Lamp holder contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the fixture.

## Power

Input 10-15 VAC/VDC, 50/60 Hz. Remote transformer required (specify separately).

## Glare Control

Die-cast A380 aluminum housing with capacity for 1LED, 3LED, or ZDC integrated LEDs.

## Weight

1.3 lbs. (0.6 kg)

## Lens

Tempered glass lens with shock resistance and high tolerance for thermal expansion and stress. Lens is frosted.

## International Compliance

Compliant per IEC 60598-1 and IEC 60598-2-7 by selecting the "e" version.

## Warranty

### Listings



## Ambient Operating Temperature

0°F to 140°F (-18°C to 60°C)

## Installation Requirements

Designed for installation in the downward direction only.

## Control

ZD or ZDC utilizes Luxor technology to zone light fixtures in up to 250 groups, dim each group in 1% increments between 0 and 100%, or change to one of 30,000 colors with RGBW LEDs. Select the ZD option for zoning/dimming or ZDC for zoning/dimming/color. Standard fixture is zoneable with Luxor.

# VE LED Down Light ORDERING INFORMATION

| Fixture Control   | Power                                     | Compliance                                    | Perforated Option              | Finish                          |
|---|---|---|--------------------------------|---------------------------------|
| <b>VE</b><br>[Default]<br>Zone with Luxor, On/Off, Phase Dimmable | <b>1 LED</b><br>2.0W/2.4VA                | <b>[default]</b><br>North America (UL Listed) | <b>[default]</b><br>Standard   | <b>BZ</b><br>Bronze<br>Metallic |
| <b>ZD</b><br>Zone/Dim with Luxor                                  | <b>3 LED</b><br>4.5 VA                    | <b>E</b><br>International (CE Certified)      | <b>PS</b><br>Perforated Sleeve | <b>FB</b><br>Black              |
| <b>ZDC</b><br>Zone/Dim/Color with Luxor                           | <b>[default ZDC option]</b><br>6.0W/7.2VA |   |                                | <b>DG</b><br>Desert Granite     |
|   |   |   |                                | <b>WI</b><br>Weathered<br>Iron  |
|   |   |   |                                | <b>SB</b><br>Sedona Brown       |
|   |   |   |                                | <b>FW</b><br>Flat White         |
|   |   |   |                                | <b>SV</b><br>Silver             |
|   |   |   |                                | <b>AB</b><br>Antique<br>Bronze  |
|   |   |   |                                | <b>AT</b><br>Antique<br>Tumbled |
|   |   |   |                                | <b>CU</b><br>Copper             |
|   |   |   |                                | <b>NP</b><br>Nickel Plate       |



EXAMPLE FIXTURE CONFIGURATION: VE-ZD-3LED-PS-SV

# VE LED Down Light PHOTOMETRICS

VE 1LED - Illuminance at a Distance

| Distance      | Center Beam fc | Beam Width        |                     |
|---------------|----------------|-------------------|---------------------|
|               |                | Vertical : 53.8 ° | Horizontal : 54.7 ° |
| 5.0' (1.5 m)  | 3.5 fc (38 lx) | 5.1 ft (1.6 m)    | 5.2 ft (1.6 m)      |
| 10.0' (3.0 m) | 0.8 fc (9 lx)  | 10.2 ft (3.1 m)   | 10.3 ft (3.1 m)     |
| 15.0' (4.6 m) | 0.4 fc (4 lx)  | 15.2 ft (4.6 m)   | 15.5 ft (4.7 m)     |
| 20.0' (6.1 m) | 0.2 fc (2 lx)  | 20.3 ft (6.2 m)   | 20.7 ft (6.3 m)     |
| 25.0' (7.6 m) | 0.1 fc (2 lx)  | 25.4 ft (7.7 m)   | 25.8 ft (7.9 m)     |
| 30.0' (9.1 m) | 0.1 fc (1 lx)  | 30.5 ft (9.3 m)   | 31.0 ft (9.4 m)     |

VE 3LED - Illuminance at a Distance

| Distance      | Center Beam fc | Beam Width        |                     |
|---------------|----------------|-------------------|---------------------|
|               |                | Vertical : 52.1 ° | Horizontal : 52.0 ° |
| 5.0' (1.5 m)  | 9 fc (96 lx)   | 4.9 ft (1.5 m)    | 4.9 ft (1.5 m)      |
| 10.0' (3.0 m) | 2.2 fc (24 lx) | 9.8 ft (3.0 m)    | 9.8 ft (3.0 m)      |
| 15.0' (4.6 m) | 1.0 fc (11 lx) | 14.7 ft (4.5 m)   | 14.6 ft (4.5 m)     |
| 20.0' (6.1 m) | 0.6 fc (6 lx)  | 19.5 ft (5.9 m)   | 19.5 ft (5.9 m)     |
| 25.0' (7.6 m) | 0.4 fc (4 lx)  | 24.4 ft (7.4 m)   | 24.4 ft (7.4 m)     |
| 30.0' (9.1 m) | 0.3 fc (3 lx)  | 29.3 ft (8.9 m)   | 29.3 ft (8.9 m)     |

VE ZDC - Illuminance at a Distance

| Distance      | Center Beam fc     | Beam Width |
|---------------|--------------------|------------|
| Feet (Meters) | Foot-Candles (Lux) |            |
| 5.0' (1.5 m)  | 11.7 fc            |            |
| 10.0' (3.0 m) | 2.85 fc            |            |
| 15.0' (4.6 m) | 1.28 fc            |            |
| 20.0' (6.1 m) | 0.72 fc            |            |
| 25.0' (7.6 m) | 0.46 fc            |            |
| 30.0' (9.1 m) | 0.32 fc            |            |

# VE LED Down Light ORDERING INFORMATION

MOUNTING OPTIONS: Specify Separately

| Mounts             | Catalog No.  |
|--------------------|--------------|
| Hanging Cable Lock | 250021820000 |

| Mounts        | Catalog No.  |
|---------------|--------------|
| Hanging Cable | 250021830000 |

# VE LED Down Light ORDERING INFORMATION

POWER OPTIONS: Specify Separately

| Power                    | Catalog No. |   |
|--------------------------|-------------|---|
| Plug-In Transformer, 6 W | MT-6W       |  |
| SURGE-MOD                |             |  |

| Power  | Catalog No. |   |
|--|-------------|---|
| Step-Down Transformer,<br>UV (120/277 V to 12 V) | ST-UV       |  |