




The MS pairs the popular styling of the MM with the energy efficiency and long life of LED technology. Choose brass or a variety of powder coat finishes to add contrast or subtly complement the surroundings.

MS: Wall Light

| | |
|---|----------------|
| NUMBER OF LEDS: | 1 |
| HALOGEN LUMEN OUTPUT EQUIVALENT: | 10 Watt |
| USEFUL LED LIFE (L70): | 50,000 hrs avg |
| INPUT VOLTAGE: | 10 to 15V |
| VA TOTAL: (Use this number to size the transformer) | 2.4 |
| WATTS USED: | 2.0 |
| LUMENS PER WATT (EFFICACY) | 25 |
| MAX LUMENS: | 52 |
| CCT (Ra) | 78.5 |

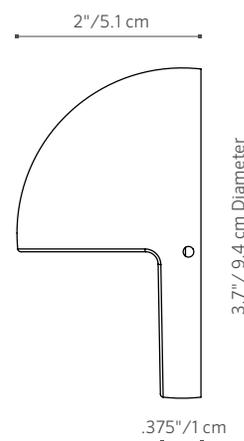




MS: Wall Light

FACTORY INSTALLED OPTIONS: Order 1 + 2 (optional) + 3 + 4

| Step | Description | Code |
|------|-------------|--|
| 1 | FIXTURE | MS |
| 2 | OPTIONAL ZD | ZD (Refer to the Luxor page in the Lighting Control section) |
| 3 | LAMP | 1LED (50,000 avg. life hours) |
| 4 | FINISH | AB*, AT*, BS, NP*, WG, FW, AL, BZ, DG, WI, VF, SB, FB |

EXAMPLE: MS-ZD-1LED-BZ = MS - ZD Option - 1LED Board - Bronze Metallic Finish

PHOTOMETRICS:

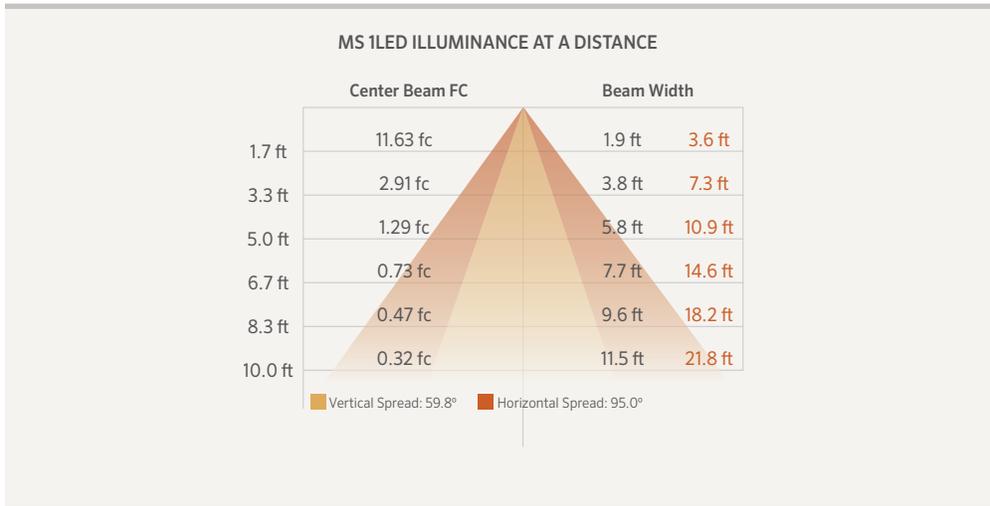

Beam angle is calculated using LM-79 method for SSL Luminaires:
 "Beam angle is defined as two times the vertical angle at which the intensity is 50% of the maximum."

METALS

-  **AB** = Antique Bronze* (On Brass)
-  **AT** = Antique Tumbled* (On Brass)
-  **NP** = Nickel Plate*
-  **BS** = Natural Brass

POWDER COAT

-  **WG** = White Gloss
-  **FW** = Flat White
-  **AL** = Almond
-  **BZ** = Bronze Metallic
-  **DG** = Desert Granite
-  **WI** = Weathered Iron
-  **VF** = Verde Speckle
-  **SB** = Sedona Brown
-  **FB** = Flat Black

The MS includes a 1LED board, choice of finish and 9 ft lead wire.

 All MS wall lights come standard with amber, and frosted filters

* May require longer lead time

