

Cora™ CA-73 Accent Light

STANDARD



PROJECT

CATALOG #


TYPE

NOTES

The CA-73 Accent Light delivers high-output performance for demanding accent applications. Powered by a PAR-36 Lamp, it allows contractors to highlight large landscape features with fewer fixtures.

Quick Facts

- Designed to illuminate large trees, architectural elements, and focal points
- Provides more coverage with fewer fixtures
- Outperforms MR-16 fixtures with higher-output PAR-36 Lamp
- Constructed from select brass for long-term durability
- Includes glare-reducing Hex Baffle
- Maintains a cohesive look with other Cora Collection fixtures for design consistency

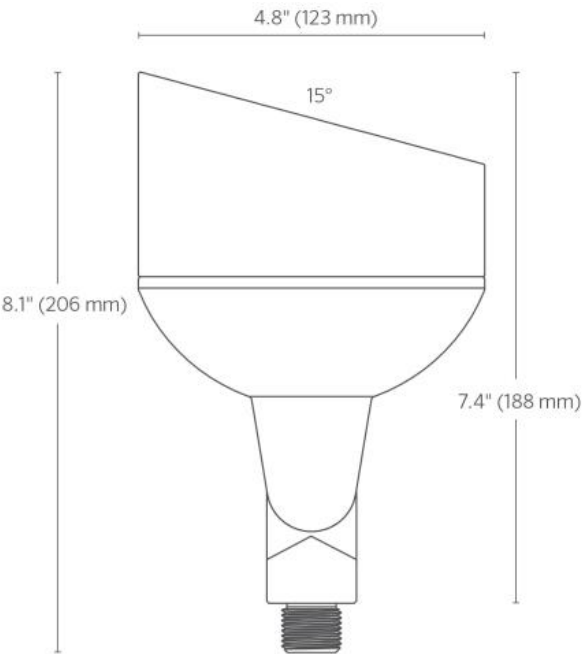

Cora™ CA-73 Accent Light SPECIFICATIONS

Light Source	E9	E12
Total Lumens (lm)	640	800
Power Consumption (VA)	8.5 VA	11.3 VA
Efficacy (lm/W)	110	90
Correlated Color Temperature (CCT)	2700K, 3000K	2700K, 3000K
Beam Angle	35°	35°
Maximum Candela (cd)	1,075	1,330
Color Rendering Index (CRI)	85+	85+
Input Voltage (V)	10 to 15	10 to 15
Minimum Rated Life (L70)	50,000 hrs	50,000 hrs

Cora™ CA-73 Accent Light SPECIFICATIONS

About FX Luminaire

As a leading manufacturer of landscape and architectural lighting, FX Luminaire provides innovative products, resources, and support to help customers bring their visions to life. The company offers a range of specification-driven solutions, including fixtures, controls, and accessories, to enhance residential and commercial landscapes.

Materials

Select brass faceplate with stainless steel hardware

Threads

½"-14 NPSM

Dimming

Primary: Consult transformer specifications. Secondary: Luxor® control (with Luxor CUBE) or a trailing-edge (reverse phase-cut) dimmer.

Adjustability

Compress-and-lock features prevent slip after installation. Offers 9° increments of adjustability over 220° of vertical alignment.

Finish

Antique Bronze finish sealed with a clear TGIC powder-coated layer or black polyester TGIC powder-coated layer, providing superior outdoor weathering in all conditions. Tested to ASTM standards.

Hardware

Stainless-steel hardware

Wiring

18 AWG (1 mm); SPT-1W; 220°F (105°C); 300 V; 10' (3 m) or 26' (8 m) length, measured from the light aperture

Sockets

Accepts standard sealed-beam PAR-36 LED Lamps equipped with bottom-positioned terminal screw connectors for direct-wire installation

Glare Control

15° angled glare shield, pre-installed hex baffle

Installation Accessories (Included)

10" (254 mm) ABS slotted stake

Lens

Opti Clear™ tempered glass for exceptional optical purity and load strength

Ambient Operating Temperature

0°F to 140°F (-18°C to 60°C)

Input Voltage

10 to 15 VAC/VDC, 50/60 Hz. Remote transformer required (specify separately).

Power Consumption

Specified power consumption indicates the full apparent power.

Housing Capacity

Designed to accept standard PAR-36 Lamps

Installation Requirements

Designed for installation in the upward direction only

Lens Transparency

Clear

Manufacturing

ISO 9001:2015 certified facility

Lifetime

L70 rating conforms to IES LM-80/TM-21 standards, projecting lumen maintenance to 70% of initial output.

Warranty

Fixture: 10-year limited warranty Lamp: 3- or 5-year limited warranty, depending on the preinstalled lamp option

Listings



Cora™ CA-73 Accent Light ORDERING INFORMATION

Fixture	Power	Color Temp	Beam Angle	Wire Lead	Finish
CA-73	E9 8.5 VA, PAR-36 Eco LED Lamp	W Warm (2700K)	FL Flood (35°)	[default] 10' (3 m)	FB Black
	E12 11.3 VA, PAR-36 Eco LED Lamp	S Soft (3000K)		XL 26' (8 m)	AB Antique Bronze
	NL Lamp not included				

-



-

-

-

-

EXAMPLE FIXTURE CONFIGURATION: CA-73-XX-XXXX-XX

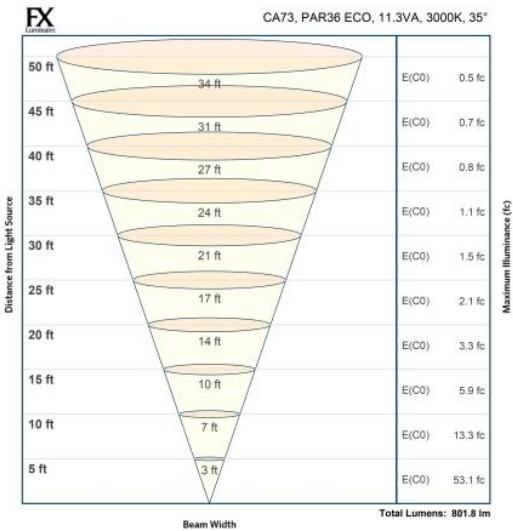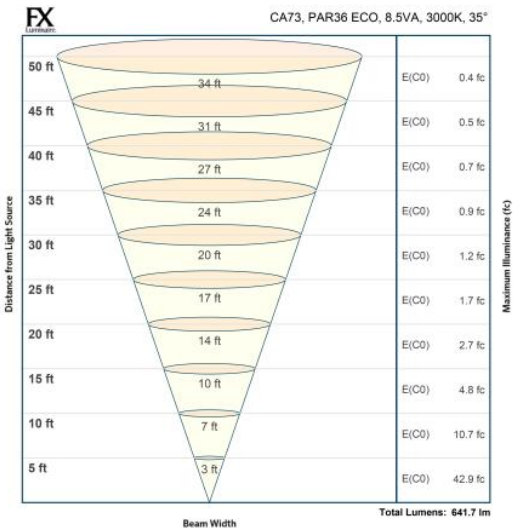

MOUNTING OPTIONS: Specify Separately

Mounts	Catalog No.		Mounts	Catalog No.	
Long Slot Spike	250015840000		Three-Prong Spike	250020020000	
Lock Ring	250030410000SP		Mini Mount for Cora Collection	BM-050-C-AB	
CE Certified Spike	eKitSpike		Ground Mount for 2.0" Schedule 40 Post Mounting with ½" Thread	GM-XX*	
2.5" Post Mount with Stabilizer	LS6054		Mini J-Box for ½" Thread	MJB-050-XX*	
ProAim® Ratcheting Spike	PARS		Post Mount for 1.5" Schedule 40 Post Mounting with ½" Thread	PM-XX*	
1.25" (32MM) Select Brass Riser	RSR-S-125-XX*-R-MF-B-XX		Super J-Box Spike	SJ-XX*	
VersaBox® Mount with ½" Thread	VB-050-XX*		Variable Height Riser for Up Lights	VHR-UL	

POWER OPTIONS: Specify Separately

Power	Catalog No.	
Low-Voltage Dimmer	DIM-LV	
DX Controller, 150 W, Stainless Steel	DX-150-SS	
Luxor Low-Voltage CUBE	LCM-LV	
Plug-In Transformer, 6 W	MT-6W	
PX Transformer, 600 W	PX-600-SS	
Step-Down Transformer, Dimmable (120 V to 12 V)	ST-120-DIM	
	SURGE-MOD	

Power	Catalog No.	
DX Controller, 150 W, Matte Gray	DX-150-M	
DX Controller, 300 W, Matte Gray	DX-300-M	
Mini Plug-In Transformer, 30 W	MT-30W	
PX Transformer, 300 W	PX-300-SS	
PX Transformer, 900 W	PX-900-SS	
Step-Down Transformer, UV (120/277 V to 12 V)	ST-UV	

SPLICING OPTIONS: Specify Separately

Splicing	Catalog No.	
Brass Lug Wire Connectors, 2-pack	WCHSBS2	
Heat Shrink Wire Connectors, 20-pack, Medium	WCHSMD20	
Ratcheting Crimper Tool	WCHSTOOL	

Splicing	Catalog No.	
Brass Lug Wire Connectors, 50-item Bulk Pack	WCHSBS50	
Heat Shrink Wire Connectors, 20-pack, Small	WCHSSM20	