




GLOBAL LOUNGER

USER MANUAL & INSTRUCTIONS


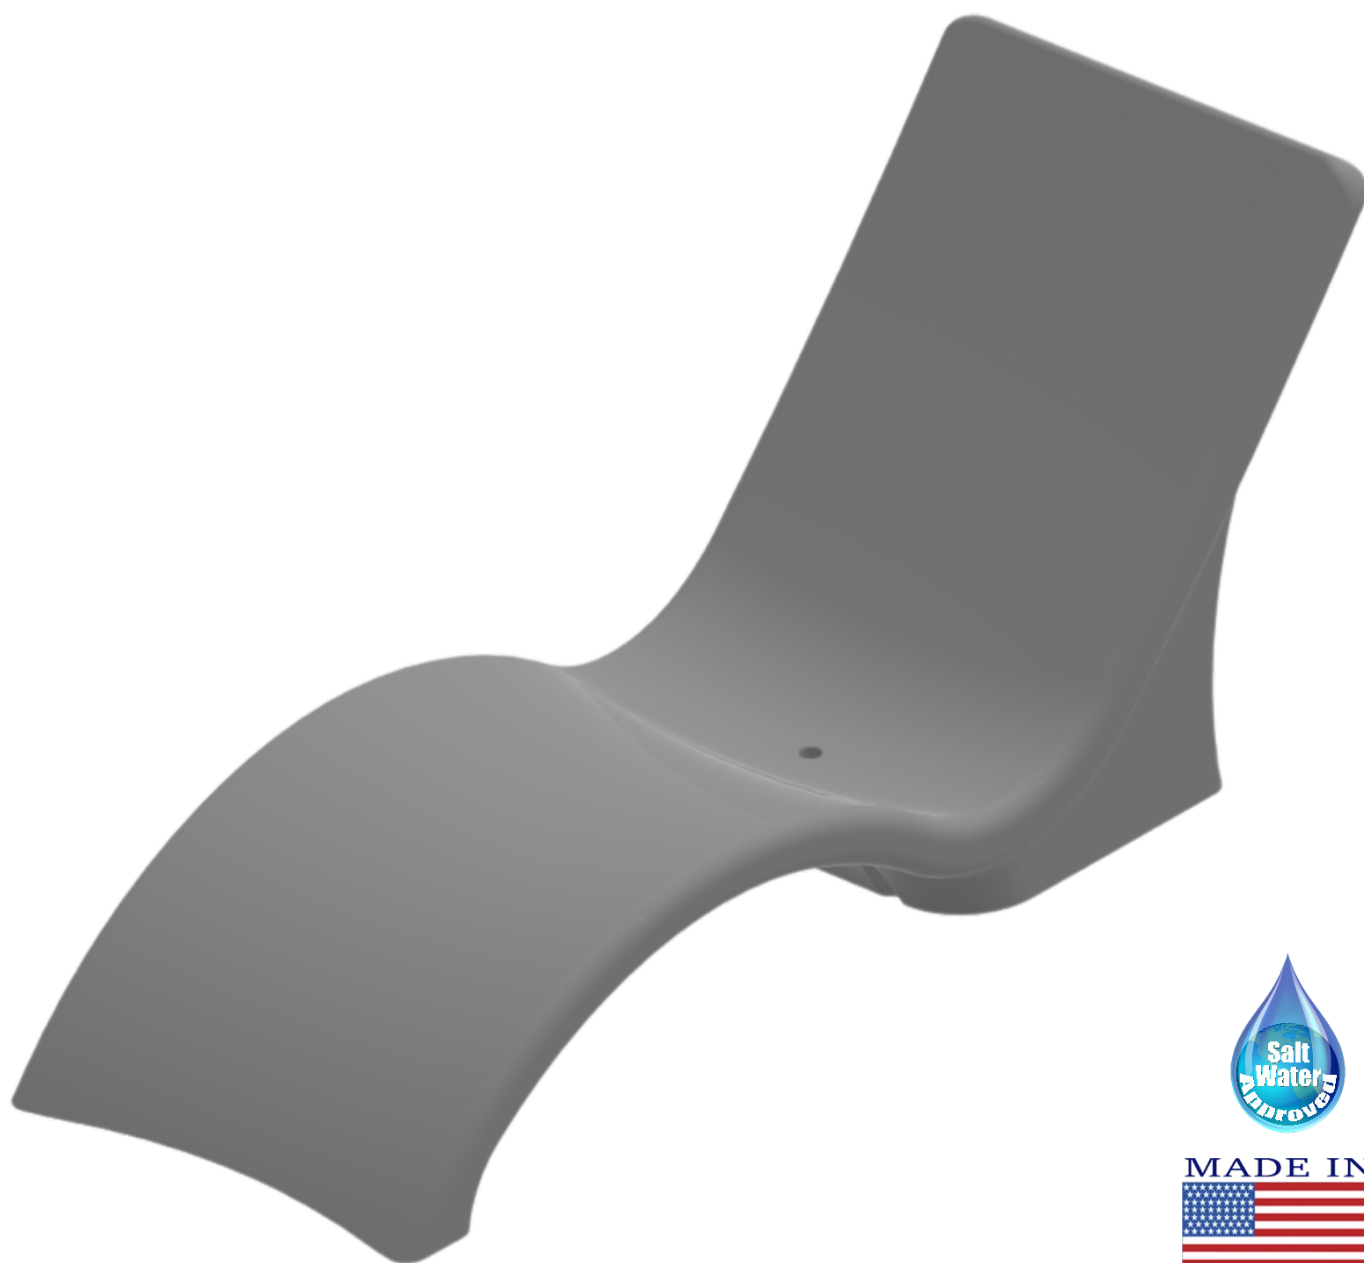


*Patent Pending



Product Information & Resources

General Inquires: info@globalpoolprod.com
Warranty Information: warranty@globalpoolprod.com

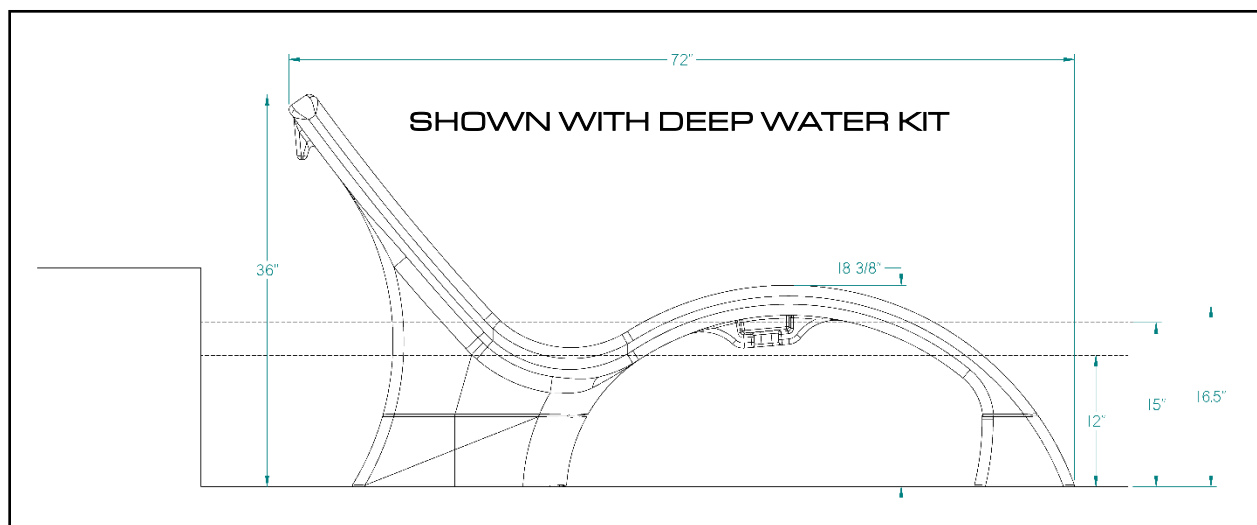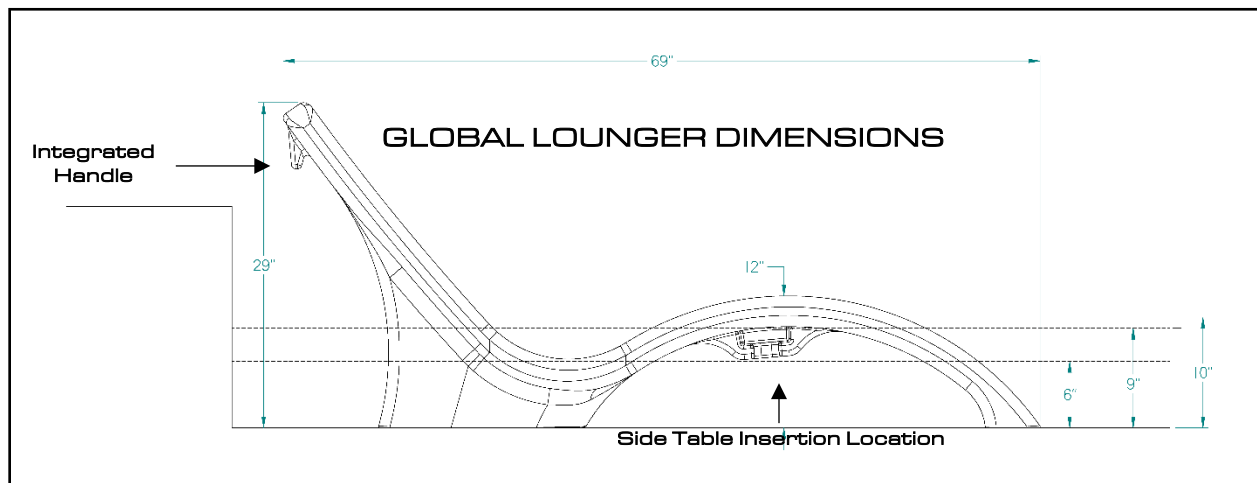

PLEASE REVIEW SAFETY INFORMATION



- Avoid pulling or dragging the lounge across the ground or pool surfaces, as this action may result in damage to both the lounge and pool.
- Do not use the lounge as a floatation device. It is designed for stationary use only and is not intended to support body weight in water.
- Use the lounge following the provided guidelines for water depths and sun shelf space.
- Before using the lounge, ensure that it is securely positioned on a stable and level surface in the pool. Unstable placement may result in tipping or falling, causing harm to the user.
- This product is not suited for standing on or jumping/diving from. Only use the lounge for sitting purposes as intended.
- When using sun protectant lotions or similar products, lounge may become slippery.
- Use caution when relocating the lounge and make use of the integrated handle to ensure secure handling.
- Do not exceed the weight limit (300 lbs/136 kg). Overloading the chair may cause structural failure and compromise user safety.

USER INSTRUCTIONS

- This lounge is designed for on-ground use and water depths up to 10 inches. If the lounge is equipped with the deep water kit, it is intended for water depths of 10 to 16.5 inches.
- For deep water kit instructions, refer to page 5 before continuing.
- Required Sun Shelf Space: 6.5' x 3' (minimum)
- Unpackage and place lounge in the desired location. The integrated handle allows for secure handling. **Avoid pulling or dragging the lounge across the ground or pool surfaces, as this action may result in damage to both the lounge and pool.**
- Once in the desired location, the lounge will begin to fill with water through the holes on the underside of the lounge. After the lounge is filled, it is ready for use.
- When removing the lounge from the pool, use the integrated handle for secure handling. The water will immediately exit the lounge as it is lifted above water level.

CLEANING & CARE INSTRUCTIONS


Global Lounge

Perform a monthly routine cleaning to keep the polyethylene lounge in good condition. It is recommended that you prepare a mild soap solution by mixing a small amount of mild liquid soap or detergent with warm water. Use the mixture with a soft sponge or cloth to remove dirt, debris, and potential stains. This may be done more frequently if needed. Avoid getting this cleaning mixture into the pool's water. After thoroughly cleaning the lounge, use water and a clean soft sponge or cloth to remove the remaining cleaning mixture from the lounge. **Do not use harsh chemicals, abrasives, or solvents as they may damage the polyethylene material.**

To remove waterline buildup, it is recommended to use CLR remover.

Cushion Headrest

Global Lounge headrests are made with Sunbrella material. For cleaning guidelines, visit www.sunbrella.com/cleaning-guide or scan the QR code below.

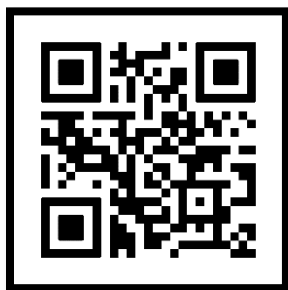

Want a chance to have your lounge showcased on our social media or website?

→ Email pictures to marketing@globalpoolproducts.com ←

DEEP WATER KIT INSTRUCTIONS

Hardware Kit Contents:

(6) 5/16" x 3/4" Bolts
(6) 5/16" Flat Washers
(6) 5/16" Lock Washers
(1) Anti-seize

Tools Required:

1/2" Socket & Ratchet
OR 1/2" Wrench

*Important note: Be sure to apply anti-seize on all threaded portions of the bolts before inserting them. All bolts provided are stainless steel, any additional hardware used must be stainless steel. Hand tighten all bolts before tightening with a socket or wrench. **Do not use power tools.***

- Unpackage and place the lounge upside down on the provided cardboard or a soft surface to prevent scratches or damage.
- Insert the deep water pedestals into the slots on the bottom of the chair.
- On the rear (foot) pedestal, use (4) 3/4" bolts and (4) flat washers. Apply anti-seize to the bolts and hand tighten them into the four brass inserts.
- On the front (seat) pedestal, use (2) 3/4" bolts and (2) flat washers. Apply anti-seize to the bolts and hand tighten them into the two brass inserts.
- Once all the bolts are in place, tighten them using a 1/2" socket or wrench. Do not use power tools.
- Flip the lounge back up-right, it is now ready for use.

If an insert is damaged, a secondary hardware kit is required (Part Number: GPP-LF-DW-TK).