



S200


HIGH RATE SAND FILTER

FILTERS

For Carefree Swimming

A high performance totally corrosion-proof filter series that combine superior filtration and features with ease of operation. Designed with the pool owner in mind, the S200 filter series is the ultimate in high rate sand filtration.



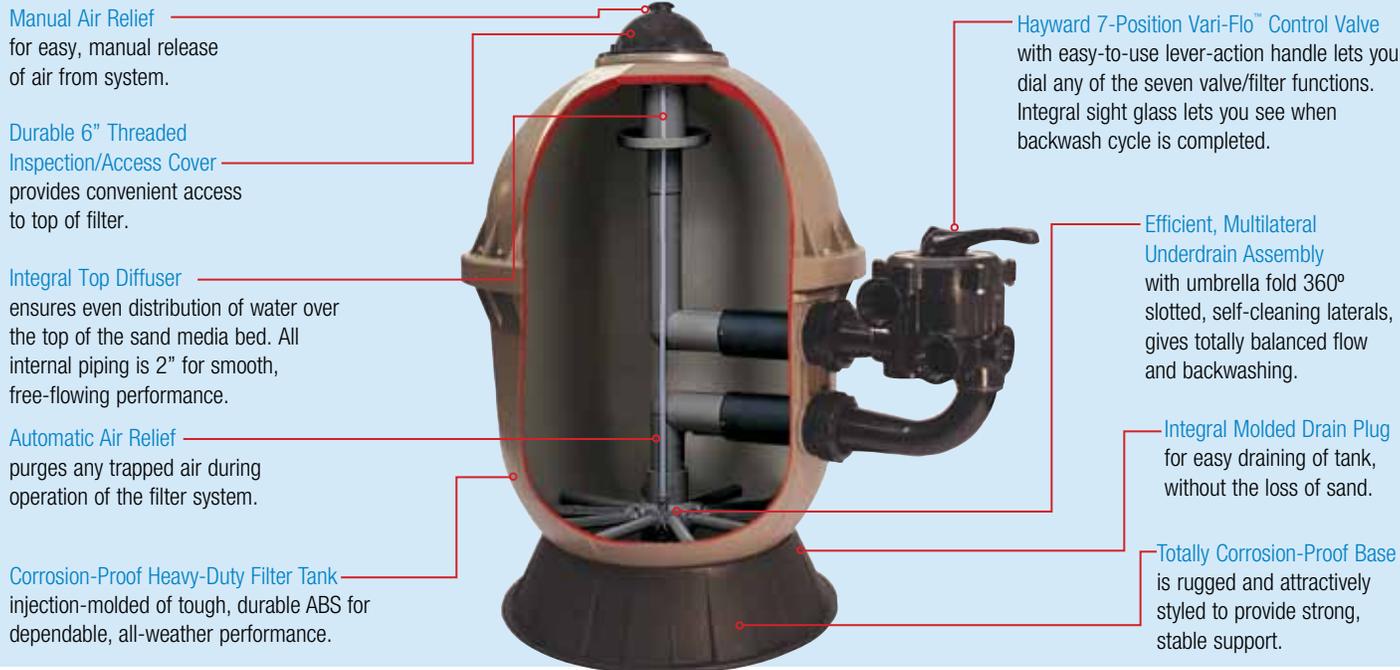

Manual Air Relief
for easy, manual release of air from system.

Durable 6" Threaded Inspection/Access Cover
provides convenient access to top of filter.

Integral Top Diffuser
ensures even distribution of water over the top of the sand media bed. All internal piping is 2" for smooth, free-flowing performance.

Automatic Air Relief
purges any trapped air during operation of the filter system.

Corrosion-Proof Heavy-Duty Filter Tank
injection-molded of tough, durable ABS for dependable, all-weather performance.

Hayward 7-Position Vari-Flo™ Control Valve
with easy-to-use lever-action handle lets you dial any of the seven valve/filter functions. Integral sight glass lets you see when backwash cycle is completed.

Efficient, Multilateral Underdrain Assembly
with umbrella fold 360° slotted, self-cleaning laterals, gives totally balanced flow and backwashing.

Integral Molded Drain Plug
for easy draining of tank, without the loss of sand.

Totally Corrosion-Proof Base
is rugged and attractively styled to provide strong, stable support.

SPECIFICATIONS – S200 SAND FILTER

Filter Type	High-Rate Sand: No. 20 Silica Sand (0.45 mm – 0.55 mm)
Filter Tank	Molded ABS
Underdrain	360° Slotted Self-Cleaning Laterals
Control Valve	2" or 1½" 7-Position Vari-Flo Valve. May also be plumbed singularly or in series with quick disconnect union couplings (less valve).
Support Base	Injection-Molded Polymer
Dimensions*	23½"W x 37"H (597 x 939.8 mm)

*Above dimensions are for filter only. Add 12" for 1 1/2" and 14" for 2" multiport valves to the width dimension.

PERFORMANCE DATA - FILTER

Model Number	Effective Filtration Area	Design Flow Rate*	Turnover (In Gallons)	
	ft. ²	GPM	8 hrs.	10 hrs.
S200	2.20	44	21,120	26,400

*Based upon 20 GPM per ft.² (maximum allowable NSF rating).

PERFORMANCE DATA - VALVE POSITIONS


Model Number	Pipe Size	Filter	Back-Wash	Waste	Recirculation	Rinse	Closed	Winter
SP0710X32	1½"	•	•	•	•	•	•	•
SP0715X32	2"	•	•	•	•	•	•	•



Vari-Flo 7-Position Control Valve

The easy-to-use lever action lets you "dial" any of seven valve/filter functions.

Patented Service-Ease Design



Unique folding ball joint design allows lateral assembly to be easily accessed for simple servicing.



To take a closer look at the S200 Filter or other Hayward products, go to www.haywardpool.com or call 1-888-HAYWARD

