



HAYWARD®



SP1424 & SP1425 Series Return Inlets

Wall Inlets

Adjustable and Non-Adjustable



White Body and Grate.



SP-1424 Illustrated.

Model No.	Description
SP-1424	Adj. 1 1/2" FIP x 2" MIP
SP-1424S	Adj. 1 1/2" SKT x 2" MIP



SP-1424 provides full range of flow adjustments, line testing and winterizing. Internal spinner valve disc and O-Ring is adjustable thru center hole in grate.

Floor Inlet

Fully Adjustable



White Body and Flusher Diffuser Plate.

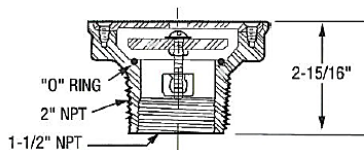

Model No.	Description
SP-1425	1 1/2" FIP x 2" MIP
SP-1425S	1 1/2" SKT x 2" MIP

Installs in pool floor to provide uniform, efficient, high velocity 360° distribution of water. Top diffuser plate is stationary and automatically provides proper flow angle away from floor to prevent staining or erosion. A full range of tamperproof flow settings, plus line testing and winterizing, is achieved by means of an internal spinner valve disc and O-Ring seal.

SP1424 & SP1425 – Head Loss (PSI)

Flow Rate (gpm)	10	20	30	40	50	60	70	80
Full Open	0	0	0	0	0	0.25	0.4	0.7
½ Open	0	0	0.25	0.5	0.7	1.0	1.5	2.1
¼ Open	0	0.25	0.5	1.3	2.5	3.5	-	-

Note: Follow proper hydraulic principles with regard to pipe size – 1 1/2" pipe Max. flow 50gpm, 2" pipe Max. flow 85gpm